Network Working Group

Internet-Draft

Updates: <u>3376</u>, <u>3810</u> (if approved) Intended status: Standards Track

Expires: January 13, 2021

M. Sivakumar Juniper Networks S. Venaas Cisco Systems, Inc. Z. Zhang ZTE Corporation H. Asaeda NICT July 12, 2020

IGMPv3/MLDv2 Message Extension draft-ietf-pim-igmp-mld-extension-01

Abstract

IGMP and MLD protocols are extensible, but no extensions have been defined so far. This document provides a well-defined way of extending IGMP and MLD, using a list of TLVs (Type, Length and Value).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at https://datatracker.ietf.org/drafts/current/.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 13, 2021.

Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (https://trustee.ietf.org/license-info) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

<u>1</u> .	Introduction	2
<u>2</u> .	Conventions used in this document	2
<u>3</u> .	Extension Format	<u>3</u>
3.	<u>1</u> . Multicast Listener Query Extension	4
3.	2. Version 2 Multicast Listener Report Extension	5
<u>3.</u>	3. IGMP Membership Query Extension	<u>6</u>
3.	4. IGMP Version 3 Membership Report Extension	7
<u>4</u> .	Applicability and backwards compatibility	8
<u>5</u> .	Security Considerations	9
<u>6</u> .	IANA Considerations	9
<u>7</u> .	References	9
<u>7.</u>	$\underline{1}$. Normative References	9
<u>7.</u>	2. Informative References	<u>10</u>
Auth	ors' Addresses	10

1. Introduction

In this document, we describe a generic method to extend IGMPv3 [RFC3376] and MLDv2 [RFC3810] messages to accommodate information other than what is contained in the current message formats. This is done by allowing a list of TLVs (Type, Length and Value) to be used in the Additional Data part of IGMPv3 and MLDv2 messages. This document defines a registry for such TLVs, while other documents will define the specific types and their values, and their semantics. The extension would only be used when at least one TLV is to be added to the message. This extension also applies to the lightweight versions of IGMPv3 and MLDv2 as defined in [RFC5790].

The extension will be part of additional data as mentioned in [RFC3810] Section 5.1.12 (resp. [RFC3376] Section 4.1.10) for query messages and [RFC3810] Section 4.2.11) for report messages.

One such TLV is being defined in [I-D.ietf-bier-mld]

2. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP

Sivakumar, et al. Expires January 13, 2021 [Page 2]

14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

3. Extension Format

A previously reserved bit in the IGMPv2 and MLDv2 headers is used to indicate whether this extension is used. It is set to 1 if it is used, otherwise 0. When this extension is used, the Additional Data of IGMPv3 and MLDv2 messages would be formatted as follows. Note that this format contains a variable number of TLVs. It MUST contain at least one TLV.

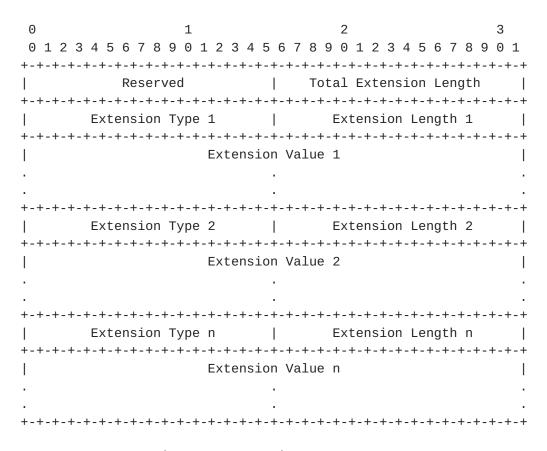


Figure 1: Extension Format

Reserved: 2 octets. Reserved. MUST be set to 0. MUST be ignored when received.

Total Extension Length: 2 octets. The remaining length of the extension. This value MUST be equal to ((2+2)*n) + Extension Length 1 + Extension Length 2 + ... Extension Length n. That is, it is the sum of the lengths of all the TLVs, including the type field (2 octets), and the length field (2 octets) of each TLV. The total number of octets used by the extension is the value of

Sivakumar, et al. Expires January 13, 2021 [Page 3]

this field plus 4 (including the 2 octets Reserved field and the 2 octets of this field).

Extension Type: 2 octets. This identifies a particular Extension Type as defined in the IGMP/MLD Extension Type Registry.

Extension Length: 2 octets. This specifies the length in octets of the following Extension Value field.

Extension Value: This field contains the value. The length and the contents of this field is according to the specification of the Extension Type as defined in the IGMP/MLD Extension Type Registry. The length MUST be as specified in the Extension Length field.

Note that there may be additional data following this extension. Total Extension Length field would indicate where this extension ends, and the additional data starts. Also, there is a possibility that an implementation uses the Additional Data part of IGMP/MLD messages, but not according to this extension scheme. When a message is received, it MUST be verified that the Total Extension Length is equal to ((2 + 2) * n) + Extension Length 1 + Extension Length 2 +... Extension Length n, where n is the number of TLVs. Note that the value of n is not known ahead of time. An implementation would walk through the TLVs and add the 4 octet overhead and the length of each TLV, until the sum is larger or equal to the Total Extension Length, or until the end of the IGMP/MLD message, whichever happens first. Any additional data after this MUST be ignored, except the data MUST be included in checksum computations. If the sum is not equal to the Total Extension Length, then it is assumed that this extension is not being used, and this specification does not apply.

3.1. Multicast Listener Query Extension

The MLD query format with extension is shown below. The E-bit is set to 1 to indicate that the extension is present.

0	1	2	3			
0 1 2 3 4 5 6	7 8 9 0 1 2 3 4	5 6 7 8 9 0 1 2	3 4 5 6 7 8 9 0 1			
+-+-+-+-+-		+-+-+-+-+-+-+-+	-+-+-+-+-+-+-+			
Type = 130	Code	Che	cksum			
+-						
Maximum Re	esponse Code	Res	erved			
+-						
*			*			

Sivakumar, et al. Expires January 13, 2021 [Page 4]

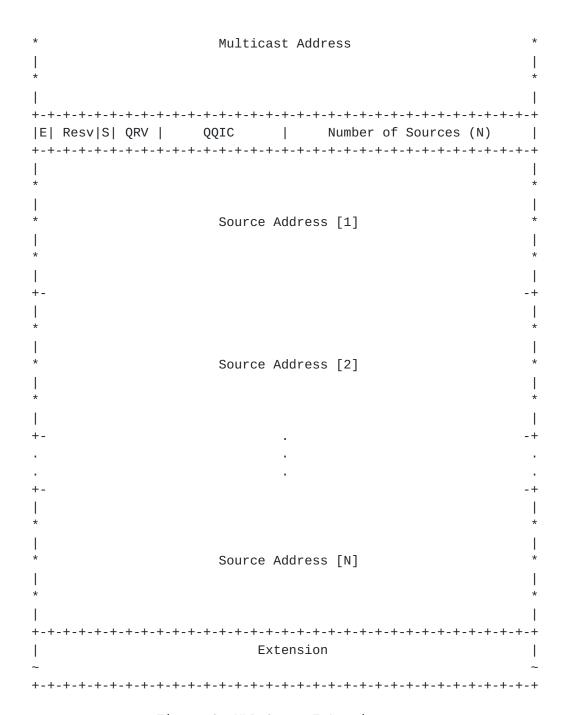


Figure 2: MLD Query Extension

3.2. Version 2 Multicast Listener Report Extension

The MLD report format with extension is shown below. The E-bit is set to 1 to indicate that the extension is present.

Sivakumar, et al. Expires January 13, 2021 [Page 5]

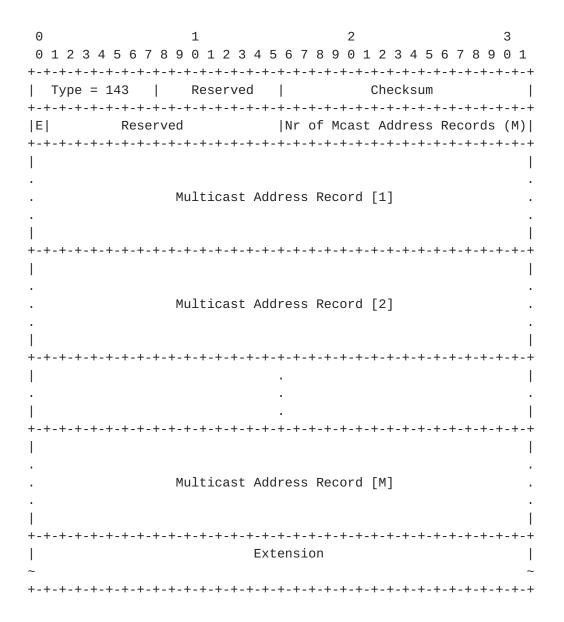


Figure 3: MLD Report Extension

3.3. IGMP Membership Query Extension

The IGMP query format with the extension is shown below. The E-bit is set to 1 to indicate that the extension is present.

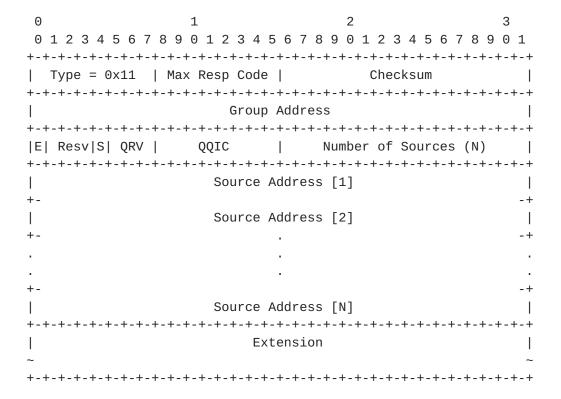


Figure 4: IGMP Query Extension

3.4. IGMP Version 3 Membership Report Extension

The IGMP report format with the extension is shown below. The E-bit is set to 1 to indicate that the extension is present.

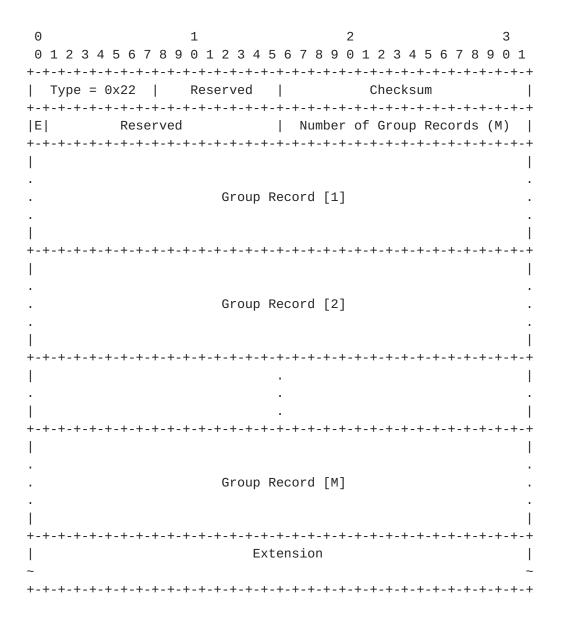


Figure 5: IGMP Report Extension

4. Applicability and backwards compatibility

IGMP and MLD implementations, host implementations in particular, rarely change, and it expected to take a long time for them to support this extension mechanism. Also as new extensions are defined, it may take a long time before they are supported. Implementations that do not support this extension mechanism will simply ignore the extension, provided they are compliant with IGMPv3 and MLDv2 RFCs, and behave as if the extension is not present. Implementations that support this extension MUST behave as if it is not present if they support non of the extension types in an IGMP/MLD message. If they support at least one of the types, they will

process the supported types according to the type specifications, and ignore any unsupported types.

When defining new types, care must be taken to ensure that nodes that support the type can co-exist with nodes that don't, on the same subnet. There could be multiple routers where only some support the extension, or multiple hosts where only some support the extension. Or a router may support it and none of the hosts, or all hosts may support it, but none of the routers.

The extension mechanism do not support IGMPv1, IGMPv2 and MLDv1. As nodes may send older version message, they would also not be able to send messages using this extension.

5. Security Considerations

This document extends MLD (resp. IGMP) message formats. As such, there is no impact on security or changes to the considerations in [RFC3810] and [RFC3376]. The respective types defined using this extension may impact security and must be considered as part of the respective specifications.

6. IANA Considerations

A new registry called "IGMP/MLD Extension Types" should be created with registration procedure "IETF Review" as defined in [RFC8126] with this document as a reference. The registry should be common for IGMP and MLD and can perhaps be added to the "Internet Group Management Protocol (IGMP) Type Numbers" section. The initial content of the registry should be as below.

Type Length Name Reference

7. References

7.1. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate
Requirement Levels", BCP 14, RFC 2119,
DOI 10.17487/RFC2119, March 1997,
https://www.rfc-editor.org/info/rfc2119.

[RFC3376] Cain, B., Deering, S., Kouvelas, I., Fenner, B., and A. Thyagarajan, "Internet Group Management Protocol, Version 3", RFC 3376, DOI 10.17487/RFC3376, October 2002, https://www.rfc-editor.org/info/rfc3376.

Sivakumar, et al. Expires January 13, 2021 [Page 9]

- [RFC3810] Vida, R., Ed. and L. Costa, Ed., "Multicast Listener
 Discovery Version 2 (MLDv2) for IPv6", RFC 3810,
 DOI 10.17487/RFC3810, June 2004,
 <https://www.rfc-editor.org/info/rfc3810>.
- [RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", BCP 26, RFC 8126, DOI 10.17487/RFC8126, June 2017, https://www.rfc-editor.org/info/rfc8126.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, https://www.rfc-editor.org/info/rfc8174>.

7.2. Informative References

[I-D.ietf-bier-mld]

Pfister, P., Wijnands, I., Venaas, S., Wang, C., Zhang, Z., and M. Stenberg, "BIER Ingress Multicast Flow Overlay using Multicast Listener Discovery Protocols", draft-ietf-bier-mld-04 (work in progress), March 2020.

[RFC5790] Liu, H., Cao, W., and H. Asaeda, "Lightweight Internet Group Management Protocol Version 3 (IGMPv3) and Multicast Listener Discovery Version 2 (MLDv2) Protocols", RFC 5790, DOI 10.17487/RFC5790, February 2010, https://www.rfc-editor.org/info/rfc5790.

Authors' Addresses

Mahesh Sivakumar Juniper Networks 64 Butler St Milpitas CA 95035 USA

Email: sivakumar.mahesh@gmail.com

Stig Venaas Cisco Systems, Inc. Tasman Drive San Jose CA 95134 USA

Email: stig@cisco.com

Sivakumar, et al. Expires January 13, 2021 [Page 10]

Zheng(Sandy) Zhang ZTE Corporation No. 50 Software Ave, Yuhuatai District Nanjing 210000 China

Email: zhang.zheng@zte.com.cn

Hitoshi Asaeda National Institute of Information and Communications Technology 4-2-1 Nukui-Kitamachi Koganei, Tokyo 184-8795 Japan

Email: asaeda@nict.go.jp

Sivakumar, et al. Expires January 13, 2021 [Page 11]