

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: March 23, 2014

P. Saint-Andre
Cisco Systems, Inc.
S. Loreto
E. Gavita
N. Hossain
Ericsson
September 19, 2013

Interworking between the Session Initiation Protocol (SIP) and the Extensible Messaging and Presence Protocol (XMPP): One-to-One Text Chat Sessions
[***draft-ietf-stox-chat-02***](#)

Abstract

This document defines a bidirectional protocol mapping for the exchange of instant messages in the context of a one-to-one chat session between a user of the Session Initiation Protocol (SIP) and a user of the Extensible Messaging and Presence Protocol (XMPP). Specifically for SIP text chat, this document specifies a mapping to the Message Session Relay Protocol (MSRP).

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 23, 2014.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Terminology	3
3.	XMPP to MSRP	4
4.	MSRP to XMPP	8
5.	Composing Events	11
6.	Delivery Reports	13
7.	IANA Considerations	15
8.	Security Considerations	15
9.	References	15
 9.1.	Normative References	15
 9.2.	Informative References	16
Appendix A.	Acknowledgements	16
	Authors' Addresses	17

Saint-Andre, et al.

Expires March 23, 2014

[Page 2]

[1. Introduction](#)

Both the Session Initiation Protocol [[RFC3261](#)] and the Extensible Messaging and Presence Protocol [[RFC6120](#)] can be used for the purpose of one-to-one text chat over the Internet. To ensure interworking between these technologies, it is important to define bidirectional protocol mappings.

The architectural assumptions underlying such protocol mappings are provided in [[I-D.ietf-stox-core](#)], including mapping of addresses and error conditions. This document specifies mappings for one-to-one text chat sessions (sometimes called "session-mode" messaging); in particular, this document specifies mappings between XMPP messages of type "chat" and the Message Session Relay Protocol [[RFC4975](#)]. Mappings for single instant messages and groupchat are provided in separate documents.

The approach taken here is to directly map syntax and semantics from one protocol to another. The mapping described herein depends on the protocols defined in the following specifications:

- o XMPP chat sessions using message stanzas of type "chat" are specified in [[RFC6121](#)].
- o SIP-based chat sessions using the SIP INVITE and SEND request types are specified in [[RFC4975](#)].

In SIMPLE, a chat session is formally negotiated just as any other session type is using SIP. By contrast, a one-to-one chat "session" in XMPP is an informal construct and is not formally negotiated: a user simply sends a message of type "chat" to a contact, the contact then replies to the message, and the sum total of such messages exchanged during a defined period of time is considered to be a chat session. To overcome the disparity between these approaches, a gateway that wishes to map between SIP and XMPP for one-to-one chat sessions needs to maintain some additional state, as described below.

The discussion venue for this document is the mailing list of the STOX WG; visit <https://www.ietf.org/mailman/listinfo/stox> for subscription information and discussion archives.

[2. Terminology](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

Saint-Andre, et al.


Expires March 23, 2014

[Page 3]

[3. XMPP to MSRP](#)

In XMPP, the "informal session" approach is to simply send someone a <message/> of type "chat" without starting any session negotiation ahead of time (as described in [[RFC6121](#)]). The XMPP "informal session" approach maps very well into a SIP MESSAGE request, as described in [[I-D.ietf-stox-core](#)]. However, the XMPP informal session approach can also be mapped to MSRP if the XMPP-to-SIP gateway maintains additional state.

The order of events is as follows.

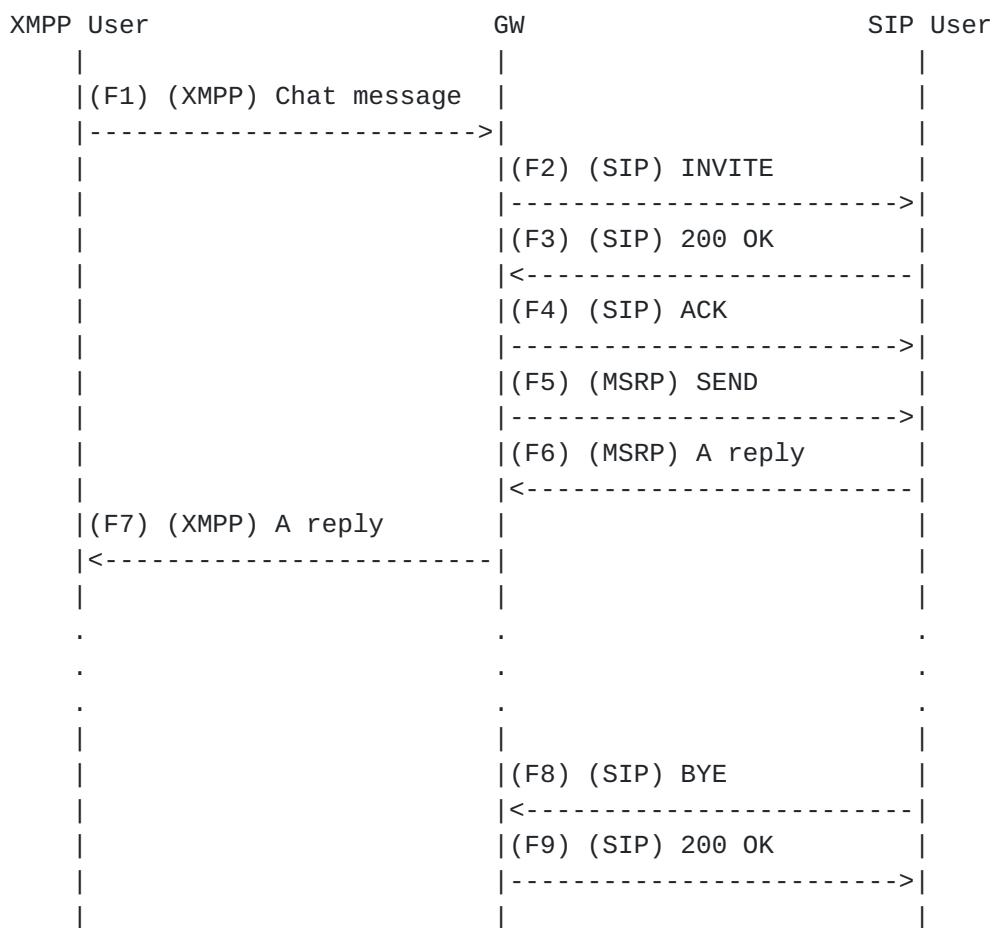

The mapping of XMPP syntax to SIP syntax SHOULD be as shown in the following table. (Mappings for several aspects not mentioned here are specified in [[I-D.ietf-stox-im](#)].)

Saint-Andre, et al.

Expires March 23, 2014

[Page 4]

Table 1: Message syntax mapping from XMPP to SIP

XMPP Element or Attribute	SIP Header or Contents
<code><thread/></code>	Call-ID
<code>id</code>	transaction identifier

First the XMPP user would generate an XMPP chat message.

Example 1: Juliet sends XMPP message (F1)

```

| <message from='juliet@example.com/balcony'
|   to='romeo@example.net'
|   id='a786hjs2'
|   type='chat'>
|   <thread>29377446-0CBB-4296-8958-590D79094C50</thread>
|   <body>Art thou not Romeo, and a Montague?</body>
| </message>

```

The local SIP-to-XMPP gateway at the SIMPLE server would then initiate an MSRP session with Romeo on Juliet's behalf (since there is no reliable way for the SIMPLE server to determine if Romeo's user agent supports MSRP, it simply needs to guess).

Example 2: Gateway starts SIP session on behalf of Juliet (F2)

```

| INVITE sip:romeo@example.net SIP/2.0
| To: <sip:romeo@example.net>
| From: <sip:juliet@example.com>
| Contact: <sip:juliet@example.com>;gr=balcony
| Subject: Open chat with Juliet?
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50
| Content-Type: application/sdp
|
| c=IN IP4 x2s.example.com
| m=message 7654 TCP/MSRP *
| a=accept-types:text/plain
| a=lang:en
| a=lang:it
| a=path:msrp://x2s.example.com:7654/jshA7weztas;tcp

```

Here we assume that Romeo accepts the MSRP session request.

Saint-Andre, et al.

Expires March 23, 2014

[Page 5]

Example 3: Romeo accepts session request (F3)

```
| SIP/2.0 200 OK
| To: <sip:juliet@example.com>;gr=balcony
| From: <sip:romeo@example.net>
| Contact: <sip:romeo@example.net>;gr=orchard
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50
| Content-Type: application/sdp
|
| c=IN IP4 s2x.example.net
| m=message 12763 TCP/MSRP *
| a=accept-types:text/plain
| a=lang:it
| a=path:msrp://s2x.example.net:12763/kjhd37s2s20w2a;tcp
```

The XMPP-to-SIP gateway then acknowledges the session acceptance on behalf of Juliet.

Example 4: Gateway sends ACK to Romeo (F4)

```
| ACK sip:juliet@example.com SIP/2.0
| To: <sip:romeo@example.net>;gr=orchard
| From: <sip:juliet@example.com>
| Contact: <sip:juliet@example.com>;gr=balcony
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50
```

The XMPP-to-SIP gateway then transforms the original XMPP chat message into MSRP.

Example 5: Gateway maps XMPP message to MSRP (F5)

```
| MSRP a786hjs2 SEND
| From-Path: msrp://x2s.example.com:7654/jshA7weztas;tcp
| To-Path: msrp://s2x.example.net:12763/kjhd37s2s20w2a;tcp
| Message-ID: 54C6F4F1-A39C-47D6-8718-FA65B3D0414A
| Byte-Range: 1-25/25
| Content-Type: text/plain
|
| Art thou not Romeo, and a Montague?
| -----a786hjs2$
```

Romeo can then send a reply using his MSRP user agent.

Saint-Andre, et al.

Expires March 23, 2014

[Page 6]

Example 6: Romeo sends reply (F6)

```
| MSRP di2fs53v SEND
| To-Path: msrp://x2s.example.com:7654/jshA7weztas;tcp
| From-Path: msrp://s2x.example.net:12763/kjhd37s2s20w2a;tcp
| Message-ID: 6480C096-937A-46E7-BF9D-1353706B60AA
| Byte-Range: 1-25/25
| Failure-Report: no
| Content-Type: text/plain
|
| Neither, fair saint, if either thee dislike.
| -----di2fs53v$
```

The SIP-to-XMPP gateway would then transform that message into appropriate XMPP syntax for routing to the intended recipient.

Example 7: Gateway maps MSRP message to XMPP (F7)

```
| <message from='romeo@example.net/orchard'
|   to='juliet@example.com/balcony'
|   id='di2fs53v'
|   type='chat'>
|   <thread>29377446-0CBB-4296-8958-590D79094C50</thread>
|   <body>Neither, fair saint, if either thee dislike.</body>
| </message>
```

When the MSRP user wishes to end the chat session, the user's MSRP client sends a SIP BYE.

Example 8: Romeo terminates chat session (F8)

```
| BYE juliet@example.com sip: SIP/2.0
| Max-Forwards: 70
| From: <sip:romeo@example.net>;tag=087js
| To: <sip:juliet@example.com>;tag=786
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50
| Cseq: 1 BYE
| Content-Length: 0
```

The BYE is then acknowledged by the XMPP-to-SIP gateway.

Saint-Andre, et al.

Expires March 23, 2014


[Page 7]

Example 9: Gateway acknowledges termination (F9)

```
| SIP/2.0 200 OK
| From: <sip:juliet@example.com>;tag=786
| To: <sip:romeo@example.net>;tag=087js
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50
| CSeq: 1 BYE
| Content-Length: 0
```

[4. MSRP to XMPP](#)

When an MSRP client sends messages through a gateway to an XMPP client that does not support formal sessions, the order of events is as follows.

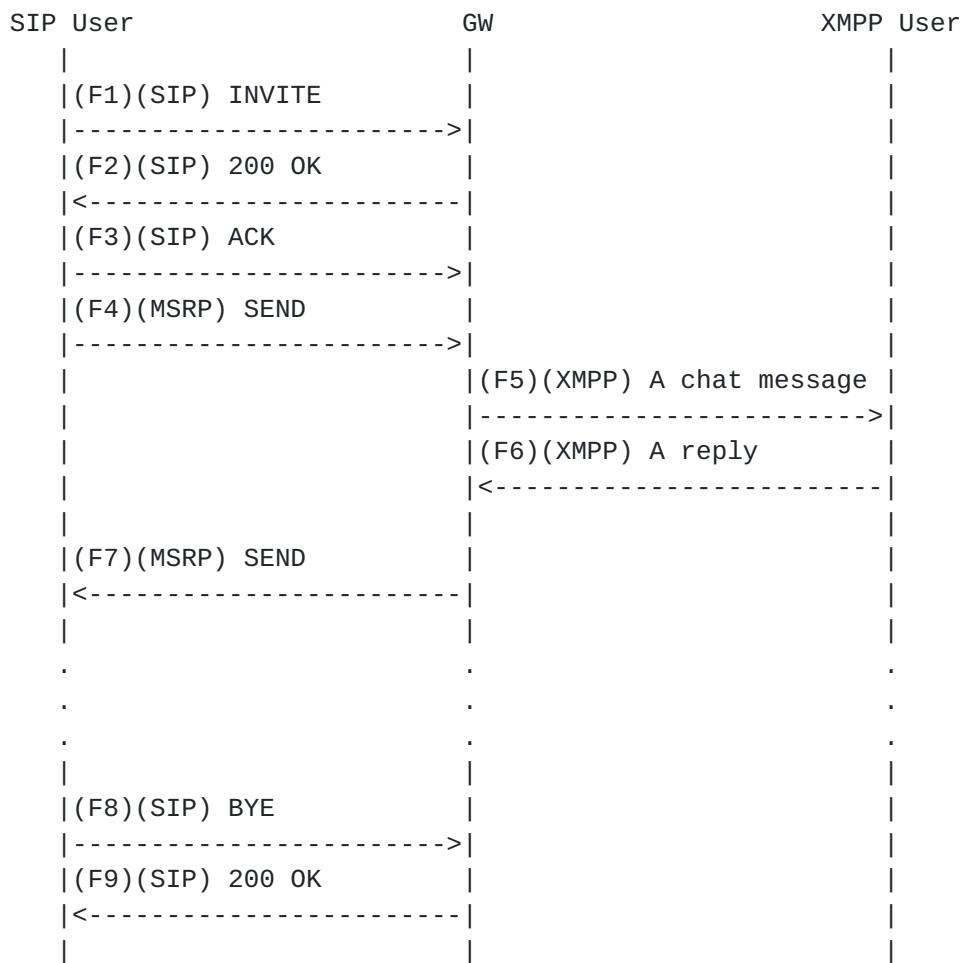

The mapping of SIP syntax to XMPP syntax SHOULD be as shown in the following table. (Mappings for several aspects not mentioned here are specified in [[I-D.ietf-stox-im](#)].)

Saint-Andre, et al.

Expires March 23, 2014

[Page 8]

Table 2: Message syntax mapping from SIP to XMPP

SIP Header or Contents	XMPP Element or Attribute
Call-ID	<thread/>
transaction identifier	id

Example 10: Romeo starts chat session (F1)

```
| INVITE sip:juliet@example.com SIP/2.0
| To: <sip:juliet@example.com>
| From: <sip:romeo@example.net>
| Contact: <sip:romeo@example.net>;gr=orchard
| Subject: Open chat with Romeo?
| Call-ID: F6989A8C-DE8A-4E21-8E07-F0898304796F
| Content-Type: application/sdp
|
| c=IN IP4 s2x.example.net
| m=message 7313 TCP/MSRP *
| a=accept-types:text/plain
| a=lang:en
| a=lang:it
| a=path:msrp://s2x.example.net:7313/ansp71weztas;tcp
```

Example 11: Gateway accepts session on Juliet's behalf (F2)

```
| SIP/2.0 200 OK
| To: <sip:romeo@example.net>;gr=orchard
| From: <sip:juliet@example.com>
| Contact: <sip:juliet@example.com>;gr=balcony
| Call-ID: F6989A8C-DE8A-4E21-8E07-F0898304796F
| Content-Type: application/sdp
|
| c=IN IP4 x2s.example.com
| m=message 8763 TCP/MSRP *
| a=accept-types:text/plain
| a=lang:it
| a=path:msrp://x2s.example.com:8763/lkj37s2s20w2a;tcp
```

Saint-Andre, et al.

Expires March 23, 2014

[Page 9]

Example 12: Romeo sends ACK (F3)

```
| ACK sip:juliet@example.com SIP/2.0
| To: <sip:juliet@example.com>;gr=balcony
| From: <sip:romeo@example.net>
| Contact: <sip:romeo@example.net>;gr=orchard
| Call-ID: F6989A8C-DE8A-4E21-8E07-F0898304796F
```

Example 13: Romeo sends message (F4)

```
| MSRP ad49kswow SEND
| To-Path: msrp://x2s.example.com:8763/1kjh37s2s20w2a;tcp
| From-Path: msrp://s2x.example.net:7313/ansp71weztas;tcp
| Message-ID: 676FDB92-7852-443A-8005-2A1B9FE44F4E
| Byte-Range: 1-32/32
| Failure-Report: no
| Content-Type: text/plain
|
| I take thee at thy word ...
| -----ad49kswow$
```

Example 14: SIP-XMPP gateway maps MSRP message to XMPP (F5)

```
| <message from='romeo@example.net'
|           to='juliet@example.com'
|           id='ad49kswow'
|           type='chat'>
|   <thread>F6989A8C-DE8A-4E21-8E07-F0898304796F</thread>
|   <body>I take thee at thy word ...</body>
| </message>
```

Example 15: Juliet sends reply (F6)

```
| <message from='juliet@example.com'
|           to='romeo@example.net'
|           id='ms53b7z9'
|           type='chat'>
|   <thread>29377446-0CBB-4296-8958-590D79094C50</thread>
|   <body>What man art thou ...?</body>
| </message>
```

Saint-Andre, et al.

Expires March 23, 2014

[Page 10]

Example 16: Gateway maps XMPP message to MSRP (F8)

```
| MSRP ms53b7z9 SEND
| To-Path: msrp://s2x.example.net:7313/jshA7weztas;tcp
| From-Path: msrp://x2s.example.com:8763/lkj37s2s20w2a;tcp
| Message-ID: 17EBA17B-94C0-463B-AD84-DE405C4C9D41
| Byte-Range: 1-25/25
| Failure-Report: no
| Content-Type: text/plain
|
| what man art thou ...?
| -----ms53b7z9$
```

Example 17: Romeo terminates chat session (F9)

```
| BYE juliet@example.com sip: SIP/2.0
| Max-Forwards: 70
| To: <sip:juliet@example.com>;gr=balcony
| From: <sip:romeo@example.net>
| Contact: <sip:romeo@example.net>;gr=orchard
| Call-ID: F6989A8C-DE8A-4E21-8E07-F0898304796F
| Cseq: 1 BYE
| Content-Length: 0
```

Example 18: Gateway acknowledges termination of session on behalf of Juliet (F10)

```
| SIP/2.0 200 OK
| To: <sip:juliet@example.com>;gr=balcony
| From: <sip:romeo@example.net>
| Contact: <sip:romeo@example.net>;gr=orchard
| Call-ID: F6989A8C-DE8A-4E21-8E07-F0898304796F
| CSeq: 1 BYE
```

5. Composing Events

Both XMPP and MSRP enable a user agent to receive notifications when a person's conversation partner is composing an instant message within the context of a chat session.

For XMPP, the Chat State Notifications specification [[XEP-0085](#)] defines five states: active, inactive, gone, composing, and paused. Some of these states are related to the act of message composition (composing, paused), whereas others are related to the sender's involvement with the chat session (active, inactive, gone).

For MSRP (and SIMPLE in general), the Indication of Message

Saint-Andre, et al.

Expires March 23, 2014

[Page 11]

Composition for Instant Messaging specification [[RFC3994](#)] defines two states: idle and active. Here the idle state indicates that the sender is not actively composing a message, and the active state indicates that the sender is indeed actively composing a message (the sending user agent simply toggles between the two states, changing to active if the user is actively composing a message and changing to idle if the user is no longer actively composing a message).

Because the XEP-0085 states can represent information that is not captured in [RFC 3994](#), gateways can either (a) map only the composing-related states or (b) map all the XEP-0085 states.

The following mappings are suggested.

Table 3: Mapping of SIMPLE isComposing events to XMPP chat states

isComposing Event	Chat State
active	composing
idle	active

Table 4: Mapping of XMPP chat states to SIMPLE isComposing events

Chat State	isComposing Event
active	idle
inactive	idle
gone	[none, see note]
composing	active
paused	idle

Although there is no direct mapping for the "gone" chat state (which is not to be confused with the <gone/> stanza error condition defined in [[RFC6120](#)]) to an isComposing event, receipt of the "gone" state can be used as a trigger for terminating the formal chat session within MSRP, i.e., for sending a SIP BYE for the session from the XMPP-SIP gateway to the SIP user. The following examples illustrate this indirect mapping.

Saint-Andre, et al.

Expires March 23, 2014

[Page 12]

Example 19: Juliet sends gone chat state

```
| <message from='juliet@example.com'  
|   id='nx62f197'  
|   to='romeo@example.net'  
|   type='chat'>  
|   <thread>29377446-0CBB-4296-8958-590D79094C50</thread>  
|   <gone xmlns='http://jabber.org/protocol/chatstates'/>  
| </message>
```

Example 20: XMPP-SIP gateway maps gone chat state to SIP BYE

```
| BYE romeo@example.net sip: SIP/2.0  
| Max-Forwards: 70  
| From: <sip:juliet@example.com>;tag=786  
| To: <sip:romeo@example.net>;tag=087js  
| Call-ID: 29377446-0CBB-4296-8958-590D79094C50  
| Cseq: 1 BYE  
| Content-Length: 0
```

6. Delivery Reports

Both XMPP and MSRP enable a user agent to receive notifications when a message has been received by the intended recipient.

For XMPP, the Message Receipts specification [[XEP-0184](#)] defines a method and XML namespace for requesting and returning indications that a message has been received by a client controlled by the intended recipient.

For MSRP, a native reporting feature is included, in the form of report chunks (see Sections [7.1.2](#) and [7.1.3](#) of [[RFC4975](#)]).

Examples follow.

First, the XMPP user sends a message containing a request for delivery notification.

Example 21: Juliet sends XMPP message with receipt request

```
| <message from='juliet@example.com'
|   id='bf9m36d5'
|   to='romeo@example.net'
|   type='chat'>
|   <thread>29377446-0CBB-4296-8958-590D79094C50</thread>
|   <body>What man art thou ...?</body>
|   <request xmlns='urn:xmpp:receipts'/>
| </message>
```

Example 22: Gateway maps XMPP message to MSRP

```
| MSRP bf9m36d5 SEND
| To-Path: msrp://s2x.example.net:7313/jshA7weztas;tcp
| From-Path: msrp://x2s.example.com:8763/lkj37s2s20w2a;tcp
| Message-ID: 6187CF9B-317A-41DA-BB6A-5E48A9C794EF
| Byte-Range: 1-25/25
| Success-Report: yes
| Failure-Report: no
| Content-Type: text/plain
|
| What man art thou ...?
| -----bf9m36d5$
```

Next, the recipient returns a report.

Example 23: Romeo returns MSRP receipt

```
| MSRP hx74g336 REPORT
| To-Path: msrp://x2s.example.com:8763/lkj37s2s20w2a;tcp
| From-Path: msrp://s2x.example.net:7313/jshA7weztas;tcp
| Message-ID: 6187CF9B-317A-41DA-BB6A-5E48A9C794EF
| Byte-Range: 1-106/106
| Status: 000 200 OK
| -----hx74g336$
```

Example 24: SIP-XMPP gateway maps receipt to XMPP

```
| <message from='romeo@example.net'
|   id='hx74g336'
|   to='juliet@example.com'>
|   <received xmlns='urn:xmpp:receipts' id='87652491' />
| </message>
```

Saint-Andre, et al.

Expires March 23, 2014

[Page 14]

7. IANA Considerations

This document requests no actions of IANA.

8. Security Considerations

Detailed security considerations for instant messaging protocols are given in [[RFC2779](#)], for SIP-based instant messaging in [[RFC3428](#)] (see also [[RFC3261](#)]), and for XMPP-based instant messaging in [[RFC6121](#)] (see also [[RFC6120](#)]).

This document specifies methods for exchanging instant messages through a gateway that translates between SIP and XMPP. Such a gateway MUST be compliant with the minimum security requirements of the instant messaging protocols for which it translates (i.e., SIP and XMPP). The addition of gateways to the security model of instant messaging specified in [[RFC2779](#)] introduces some new risks. In particular, end-to-end security properties (especially confidentiality and integrity) between instant messaging user agents that interface through a SIMPLE-XMPP gateway can be provided only if common formats are supported. Specification of those common formats is out of scope for this document, although it is recommended to use [[RFC3862](#)] for instant messages.

9. References

9.1. Normative References

- [I-D.ietf-stox-core]
Saint-Andre, P., Houry, A., and J. Hildebrand, "Interworking between the Session Initiation Protocol (SIP) and the Extensible Messaging and Presence Protocol (XMPP): Core", [draft-ietf-stox-core-04](#) (work in progress), July 2013.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3261] Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol", [RFC 3261](#), June 2002.
- [RFC3862] Klyne, G. and D. Atkins, "Common Presence and Instant Messaging (CPIM): Message Format", [RFC 3862](#), August 2004.

Saint-Andre, et al.

Expires March 23, 2014

[Page 15]

- [RFC3994] Schulzrinne, H., "Indication of Message Composition for Instant Messaging", [RFC 3994](#), January 2005.
- [RFC4975] Campbell, B., Mahy, R., and C. Jennings, "The Message Session Relay Protocol (MSRP)", [RFC 4975](#), September 2007.
- [RFC6120] Saint-Andre, P., "Extensible Messaging and Presence Protocol (XMPP): Core", [RFC 6120](#), March 2011.
- [RFC6121] Saint-Andre, P., "Extensible Messaging and Presence Protocol (XMPP): Instant Messaging and Presence", [RFC 6121](#), March 2011.
- [XEP-0085]
Saint-Andre, P. and D. Smith, "Chat State Notifications", XSF XEP 0085, September 2009.
- [XEP-0184]
Saint-Andre, P. and J. Hildebrand, "Message Delivery Receipts", XSF XEP 0184, March 2011.

9.2. Informative References

- [I-D.ietf-stox-im]
Saint-Andre, P., Houry, A., and J. Hildebrand, "Interworking between the Session Initiation Protocol (SIP) and the Extensible Messaging and Presence Protocol (XMPP): Instant Messaging", [draft-ietf-stox-im-03](#) (work in progress), September 2013.
- [RFC2779] Day, M., Aggarwal, S., and J. Vincent, "Instant Messaging / Presence Protocol Requirements", [RFC 2779](#), February 2000.
- [RFC3428] Campbell, B., Rosenberg, J., Schulzrinne, H., Huitema, C., and D. Gurle, "Session Initiation Protocol (SIP) Extension for Instant Messaging", [RFC 3428](#), December 2002.

Appendix A. Acknowledgements

Some text in this document was borrowed from [\[I-D.ietf-stox-core\]](#).

Thanks to Adrian Georgescu, Philipp Hancke, Saul Ibarra Corretge, and Tory Patnoe for their feedback.

Saint-Andre, et al.

Expires March 23, 2014

[Page 16]

Authors' Addresses

Peter Saint-Andre
Cisco Systems, Inc.
1899 Wynkoop Street, Suite 600
Denver, CO 80202
USA

Phone: +1-303-308-3282
Email: psaintan@cisco.com

Salvatore Loreto
Ericsson
Hirsalantie 11
Jorvas 02420
Finland

Email: Salvatore.Loreto@ericsson.com

Eddy Gavita
Ericsson
Decarie Boulevard
Town of Mount Royal, Quebec
Canada

Email: eddy.gavita@ericsson.com

Nazin Hossain
Ericsson
Decarie Boulevard
Town of Mount Royal, Quebec
Canada

Email: Nazin.Hossain@ericsson.com

