

TRANS (Public Notary Transparency)  
Internet-Draft  
Obsoletes: [6962](#) (if approved)  
Intended status: Experimental  
Expires: 15 November 2021

B. Laurie  
A. Langley  
E. Kasper  
E. Messeri  
Google  
R. Stradling  
Sectigo  
14 May 2021

**Certificate Transparency Version 2.0**  
**draft-ietf-trans-rfc6962-bis-38**

Abstract

This document describes version 2.0 of the Certificate Transparency (CT) protocol for publicly logging the existence of Transport Layer Security (TLS) server certificates as they are issued or observed, in a manner that allows anyone to audit certification authority (CA) activity and notice the issuance of suspect certificates as well as to audit the certificate logs themselves. The intent is that eventually clients would refuse to honor certificates that do not appear in a log, effectively forcing CAs to add all issued certificates to the logs.

This document obsoletes [RFC 6962](#). It also specifies a new TLS extension that is used to send various CT log artifacts.

Logs are network services that implement the protocol operations for submissions and queries that are defined in this document.

[RFC Editor: please update 'RFCXXXX' to refer to this document, once its RFC number is known, through the document.]

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 15 November 2021.

## Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">4</a>
<a href="#">1.1.</a>	Requirements Language . . . . .	<a href="#">5</a>
<a href="#">1.2.</a>	Data Structures . . . . .	<a href="#">5</a>
<a href="#">1.3.</a>	Major Differences from CT 1.0 . . . . .	<a href="#">6</a>
<a href="#">2.</a>	Cryptographic Components . . . . .	<a href="#">7</a>
<a href="#">2.1.</a>	Merkle Hash Trees . . . . .	<a href="#">7</a>
<a href="#">2.1.1.</a>	Definition of the Merkle Tree . . . . .	<a href="#">7</a>
<a href="#">2.1.2.</a>	Verifying a Tree Head Given Entries . . . . .	<a href="#">8</a>
<a href="#">2.1.3.</a>	Merkle Inclusion Proofs . . . . .	<a href="#">9</a>
<a href="#">2.1.4.</a>	Merkle Consistency Proofs . . . . .	<a href="#">11</a>
<a href="#">2.1.5.</a>	Example . . . . .	<a href="#">13</a>
<a href="#">2.2.</a>	Signatures . . . . .	<a href="#">14</a>
<a href="#">3.</a>	Submitters . . . . .	<a href="#">15</a>
<a href="#">3.1.</a>	Certificates . . . . .	<a href="#">15</a>
<a href="#">3.2.</a>	Precertificates . . . . .	<a href="#">15</a>
<a href="#">3.2.1.</a>	Binding Intent to Issue . . . . .	<a href="#">17</a>
<a href="#">4.</a>	Log Format and Operation . . . . .	<a href="#">17</a>
<a href="#">4.1.</a>	Log Parameters . . . . .	<a href="#">18</a>
<a href="#">4.2.</a>	Evaluating Submissions . . . . .	<a href="#">19</a>
<a href="#">4.2.1.</a>	Minimum Acceptance Criteria . . . . .	<a href="#">19</a>
<a href="#">4.2.2.</a>	Discretionary Acceptance Criteria . . . . .	<a href="#">20</a>
<a href="#">4.3.</a>	Log Entries . . . . .	<a href="#">20</a>
<a href="#">4.4.</a>	Log ID . . . . .	<a href="#">21</a>
<a href="#">4.5.</a>	TransItem Structure . . . . .	<a href="#">21</a>
<a href="#">4.6.</a>	Log Artifact Extensions . . . . .	<a href="#">22</a>
<a href="#">4.7.</a>	Merkle Tree Leaves . . . . .	<a href="#">23</a>
<a href="#">4.8.</a>	Signed Certificate Timestamp (SCT) . . . . .	<a href="#">24</a>
<a href="#">4.9.</a>	Merkle Tree Head . . . . .	<a href="#">25</a>
<a href="#">4.10.</a>	Signed Tree Head (STH) . . . . .	<a href="#">26</a>
<a href="#">4.11.</a>	Merkle Consistency Proofs . . . . .	<a href="#">26</a>



4.12.	Merkle Inclusion Proofs . . . . .	27
4.13.	Shutting down a log . . . . .	28
5.	Log Client Messages . . . . .	28
5.1.	Submit Entry to Log . . . . .	30
5.2.	Retrieve Latest Signed Tree Head . . . . .	32
5.3.	Retrieve Merkle Consistency Proof between Two Signed Tree Heads . . . . .	32
5.4.	Retrieve Merkle Inclusion Proof from Log by Leaf Hash . . . . .	33
5.5.	Retrieve Merkle Inclusion Proof, Signed Tree Head and Consistency Proof by Leaf Hash . . . . .	34
5.6.	Retrieve Entries and STH from Log . . . . .	35
5.7.	Retrieve Accepted Trust Anchors . . . . .	37
6.	TLS Servers . . . . .	38
6.1.	TLS Client Authentication . . . . .	38
6.2.	Multiple SCTs . . . . .	39
6.3.	TransItemList Structure . . . . .	39
6.4.	Presenting SCTs, inclusions proofs and STHs . . . . .	40
6.5.	transparency_info TLS Extension . . . . .	40
7.	Certification Authorities . . . . .	41
7.1.	Transparency Information X.509v3 Extension . . . . .	41
7.1.1.	OCSP Response Extension . . . . .	41
7.1.2.	Certificate Extension . . . . .	41
7.2.	TLS Feature X.509v3 Extension . . . . .	41
8.	Clients . . . . .	41
8.1.	TLS Client . . . . .	42
8.1.1.	Receiving SCTs and inclusion proofs . . . . .	42
8.1.2.	Reconstructing the TBSCertificate . . . . .	42
8.1.3.	Validating SCTs . . . . .	42
8.1.4.	Fetching inclusion proofs . . . . .	43
8.1.5.	Validating inclusion proofs . . . . .	43
8.1.6.	Evaluating compliance . . . . .	44
8.2.	Monitor . . . . .	44
8.3.	Auditing . . . . .	45
9.	Algorithm Agility . . . . .	46
10.	IANA Considerations . . . . .	47
10.1.	Additions to existing registries . . . . .	47
10.1.1.	New Entry to the TLS ExtensionType Registry . . . . .	47
10.1.2.	URN Sub-namespace for TRANS errors (urn:ietf:params:trans:error) . . . . .	47
10.2.	New CT-Related registries . . . . .	47
10.2.1.	Hash Algorithms . . . . .	48
10.2.2.	Signature Algorithms . . . . .	48
10.2.3.	VersionedTransTypes . . . . .	49
10.2.4.	Log Artifact Extension Registry . . . . .	50
10.2.5.	Log ID Registry . . . . .	51
10.2.6.	Error Types Registry . . . . .	52
11.	Security Considerations . . . . .	54
11.1.	Misissued Certificates . . . . .	54



<a href="#">11.2.</a>	Detection of Misissue . . . . .	<a href="#">54</a>
<a href="#">11.3.</a>	Misbehaving Logs . . . . .	<a href="#">55</a>
<a href="#">11.4.</a>	Multiple SCTs . . . . .	<a href="#">55</a>
<a href="#">11.5.</a>	Leakage of DNS Information . . . . .	<a href="#">56</a>
<a href="#">12.</a>	Acknowledgements . . . . .	<a href="#">56</a>
<a href="#">13.</a>	References . . . . .	<a href="#">56</a>
<a href="#">13.1.</a>	Normative References . . . . .	<a href="#">56</a>
<a href="#">13.2.</a>	Informative References . . . . .	<a href="#">58</a>
<a href="#">Appendix A.</a>	Supporting v1 and v2 simultaneously (Informative) .	<a href="#">59</a>
<a href="#">Appendix B.</a>	An ASN.1 Module (Informative) . . . . .	<a href="#">60</a>
Authors' Addresses	. . . . .	<a href="#">62</a>

## [1.](#) Introduction

Certificate Transparency aims to mitigate the problem of misissued certificates by providing append-only logs of issued certificates. The logs do not themselves prevent misissuance, but they ensure that interested parties (particularly those named in certificates) can detect such misissuance. Note that this is a general mechanism that could be used for transparently logging any form of binary data, subject to some kind of inclusion criteria. In this document, we only describe its use for public TLS server certificates (i.e., where the inclusion criteria is a valid certificate issued by a public certification authority (CA)). A typical definition of "public" can be found in [[CABBR](#)].

Each log contains certificate chains, which can be submitted by anyone. It is expected that public CAs will contribute all their newly issued certificates to one or more logs; however certificate holders can also contribute their own certificate chains, as can third parties. In order to avoid logs being rendered useless by the submission of large numbers of spurious certificates, it is required that each chain ends with a trust anchor that is accepted by the log. A log may also limit the length of the chain it is willing to accept; such chains must also end with an acceptable trust anchor. When a chain is accepted by a log, a signed timestamp is returned, which can later be used to provide evidence to TLS clients that the chain has been submitted. TLS clients can thus require that all certificates they accept as valid are accompanied by signed timestamps.

Those who are concerned about misissuance can monitor the logs, asking them regularly for all new entries, and can thus check whether domains for which they are responsible have had certificates issued that they did not expect. What they do with this information, particularly when they find that a misissuance has happened, is beyond the scope of this document. However, broadly speaking, they can invoke existing business mechanisms for dealing with misissued certificates, such as working with the CA to get the certificate



revoked, or with maintainers of trust anchor lists to get the CA removed. Of course, anyone who wants can monitor the logs and, if they believe a certificate is incorrectly issued, take action as they see fit.

Similarly, those who have seen signed timestamps from a particular log can later demand a proof of inclusion from that log. If the log is unable to provide this (or, indeed, if the corresponding certificate is absent from monitors' copies of that log), that is evidence of the incorrect operation of the log. The checking operation is asynchronous to allow clients to proceed without delay, despite possible issues such as network connectivity and the vagaries of firewalls.

The append-only property of each log is achieved using Merkle Trees, which can be used to efficiently prove that any particular instance of the log is a superset of any particular previous instance and to efficiently detect various misbehaviors of the log (e.g., issuing a signed timestamp for a certificate that is not subsequently logged).

It is necessary to treat each log as a trusted third party, because the log auditing mechanisms described in this document can be circumvented by a misbehaving log that shows different, inconsistent views of itself to different clients. While mechanisms are being developed to address these shortcomings and thereby avoid the need to blindly trust logs, such mechanisms are outside the scope of this document.

### **1.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14 \[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

### **1.2. Data Structures**

Data structures are defined and encoded according to the conventions laid out in [Section 3 of \[RFC8446\]](#).

This document uses object identifiers (OIDs) to identify Log IDs (see [Section 4.4](#)), the precertificate CMS "eContentType" (see [Section 3.2](#)), and X.509v3 extensions in certificates (see [Section 7.1.2](#)) and OCSP responses (see [Section 7.1.1](#)). The OIDs are defined in an arc that was selected due to its short encoding.





### **1.3. Major Differences from CT 1.0**

This document revises and obsoletes the CT 1.0 [[RFC6962](#)] protocol, drawing on insights gained from CT 1.0 deployments and on feedback from the community. The major changes are:

- \* Hash and signature algorithm agility: permitted algorithms are now specified in IANA registries.
- \* Precertificate format: precertificates are now CMS objects rather than X.509 certificates, which avoids violating the certificate serial number uniqueness requirement in [Section 4.1.2.2 of \[RFC5280\]](#).
- \* Removed precertificate signing certificates and the precertificate poison extension: the change of precertificate format means that these are no longer needed.
- \* Logs IDs: each log is now identified by an OID rather than by the hash of its public key. OID allocations are managed by an IANA registry.
- \* "TransItem" structure: this new data structure is used to encapsulate most types of CT data. A "TransItemList", consisting of one or more "TransItem" structures, can be used anywhere that "SignedCertificateTimestampList" was used in [[RFC6962](#)].
- \* Merkle tree leaves: the "MerkleTreeLeaf" structure has been replaced by the "TransItem" structure, which eases extensibility and simplifies the leaf structure by removing one layer of abstraction.
- \* Unified leaf format: the structure for both certificate and precertificate entries now includes only the TBSCertificate (whereas certificate entries in [[RFC6962](#)] included the entire certificate).
- \* Log Artifact Extensions: these are now typed and managed by an IANA registry, and they can now appear not only in SCTs but also in STHs.
- \* API outputs: complete "TransItem" structures are returned, rather than the constituent parts of each structure.
- \* get-all-by-hash: new client API for obtaining an inclusion proof and the corresponding consistency proof at the same time.



- \* submit-entry: new client API, replacing add-chain and add-pre-chain.
- \* Presenting SCTs with proofs: TLS servers may present SCTs together with the corresponding inclusion proofs using any of the mechanisms that [\[RFC6962\]](#) defined for presenting SCTs only. (Presenting SCTs only is still supported).
- \* CT TLS extension: the "signed\_certificate\_timestamp" TLS extension has been replaced by the "transparency\_info" TLS extension.
- \* Verification algorithms: added detailed algorithms for verifying inclusion proofs, for verifying consistency between two STHs, and for verifying a root hash given a complete list of the relevant leaf input entries.
- \* Extensive clarifications and editorial work.

## **2. Cryptographic Components**

### **2.1. Merkle Hash Trees**

A full description of Merkle Hash Tree is beyond the scope of this document. Briefly, it is a binary tree where each non-leaf node is a hash of its children. For CT, the number of children is at most two. Additional information can be found in the Introduction and Reference section of [\[RFC8391\]](#).

#### **2.1.1. Definition of the Merkle Tree**

The log uses a binary Merkle Hash Tree for efficient auditing. The hash algorithm used is one of the log's parameters (see [Section 4.1](#)). This document establishes a registry of acceptable hash algorithms (see [Section 10.2.1](#)). Throughout this document, the hash algorithm in use is referred to as HASH and the size of its output in bytes as HASH\_SIZE. The input to the Merkle Tree Hash is a list of data entries; these entries will be hashed to form the leaves of the Merkle Hash Tree. The output is a single HASH\_SIZE Merkle Tree Hash. Given an ordered list of  $n$  inputs,  $D_n = \{d[0], d[1], \dots, d[n-1]\}$ , the Merkle Tree Hash (MTH) is thus defined as follows:

The hash of an empty list is the hash of an empty string:

$$\text{MTH}(\{\}) = \text{HASH}().$$

The hash of a list with one entry (also known as a leaf hash) is:

$$\text{MTH}(\{d[0]\}) = \text{HASH}(0x00 \parallel d[0]).$$



For  $n > 1$ , let  $k$  be the largest power of two smaller than  $n$  (i.e.,  $k < n \leq 2k$ ). The Merkle Tree Hash of an  $n$ -element list  $D_n$  is then defined recursively as

$$\text{MTH}(D_n) = \text{HASH}(0x01 \parallel \text{MTH}(D[0:k]) \parallel \text{MTH}(D[k:n])),$$

where:

\*  $\parallel$  denotes concatenation

\*  $:$  denotes concatenation of lists

\*  $D[k_1:k_2] = D'_{(k_2-k_1)}$  denotes the list  $\{d'[0] = d[k_1], d'[1] = d[k_1+1], \dots, d'[k_2-k_1-1] = d[k_2-1]\}$  of length  $(k_2 - k_1)$ .

Note that the hash calculations for leaves and nodes differ; this domain separation is required to give second preimage resistance.

Note that we do not require the length of the input list to be a power of two. The resulting Merkle Tree may thus not be balanced; however, its shape is uniquely determined by the number of leaves. (Note: This Merkle Tree is essentially the same as the history tree [[CrosbyWallach](#)] proposal, except our definition handles non-full trees differently).

### **2.1.2. Verifying a Tree Head Given Entries**

When a client has a complete list of "entries" from "0" up to "tree\_size - 1" and wishes to verify this list against a tree head "root\_hash" returned by the log for the same "tree\_size", the following algorithm may be used:

1. Set "stack" to an empty stack.
2. For each "i" from "0" up to "tree\_size - 1":
  1. Push "HASH(0x00  $\parallel$  entries[i])" to "stack".
  2. Set "merge\_count" to the lowest value ("0" included) such that "LSB(i  $\gg$  merge\_count)" is not set, where "LSB" means the least significant bit. In other words, set "merge\_count" to the number of consecutive "1"s found starting at the least significant bit of "i".
3. Repeat "merge\_count" times:
  1. Pop "right" from "stack".



2. Pop "left" from "stack".
3. Push "HASH(0x01 || left || right)" to "stack".
3. If there is more than one element in the "stack", repeat the same merge procedure (the sub-items of Step 2.3 above) until only a single element remains.
4. The remaining element in "stack" is the Merkle Tree hash for the given "tree\_size" and should be compared by equality against the supplied "root\_hash".

### **2.1.3. Merkle Inclusion Proofs**

A Merkle inclusion proof for a leaf in a Merkle Hash Tree is the shortest list of additional nodes in the Merkle Tree required to compute the Merkle Tree Hash for that tree. Each node in the tree is either a leaf node or is computed from the two nodes immediately below it (i.e., towards the leaves). At each step up the tree (towards the root), a node from the inclusion proof is combined with the node computed so far. In other words, the inclusion proof consists of the list of missing nodes required to compute the nodes leading from a leaf to the root of the tree. If the root computed from the inclusion proof matches the true root, then the inclusion proof proves that the leaf exists in the tree.

#### **2.1.3.1. Generating an Inclusion Proof**

Given an ordered list of  $n$  inputs to the tree,  $D_n = \{d[0], d[1], \dots, d[n-1]\}$ , the Merkle inclusion proof  $PATH(m, D_n)$  for the  $(m+1)$ th input  $d[m]$ ,  $0 \leq m < n$ , is defined as follows:

The proof for the single leaf in a tree with a one-element input list  $D[1] = \{d[0]\}$  is empty:

$$PATH(0, \{d[0]\}) = \{\}$$

For  $n > 1$ , let  $k$  be the largest power of two smaller than  $n$ . The proof for the  $(m+1)$ th element  $d[m]$  in a list of  $n > m$  elements is then defined recursively as

$$PATH(m, D_n) = PATH(m, D[0:k]) : MTH(D[k:n]) \text{ for } m < k; \text{ and}$$

$$PATH(m, D_n) = PATH(m - k, D[k:n]) : MTH(D[0:k]) \text{ for } m \geq k,$$

The  $:$  operator and  $D[k1:k2]$  are defined the same as in [Section 2.1.1](#).





#### **2.1.3.2.    Verifying an Inclusion Proof**

When a client has received an inclusion proof (e.g., in a "TransItem" of type "inclusion\_proof\_v2") and wishes to verify inclusion of an input "hash" for a given "tree\_size" and "root\_hash", the following algorithm may be used to prove the "hash" was included in the "root\_hash":

1. Compare "leaf\_index" from the "inclusion\_proof\_v2" structure against "tree\_size". If "leaf\_index" is greater than or equal to "tree\_size" then fail the proof verification.
2. Set "fn" to "leaf\_index" and "sn" to "tree\_size - 1".
3. Set "r" to "hash".
4. For each value "p" in the "inclusion\_path" array:  
  
    If "sn" is 0, stop the iteration and fail the proof verification.  
  
    If "LSB(fn)" is set, or if "fn" is equal to "sn", then:
  1. Set "r" to "HASH(0x01 || p || r)"
  2. If "LSB(fn)" is not set, then right-shift both "fn" and "sn" equally until either "LSB(fn)" is set or "fn" is "0".  
    Otherwise:
  1. Set "r" to "HASH(0x01 || r || p)"  
    Finally, right-shift both "fn" and "sn" one time.
5. Compare "sn" to 0. Compare "r" against the "root\_hash". If "sn" is equal to 0, and "r" and the "root\_hash" are equal, then the log has proven the inclusion of "hash". Otherwise, fail the proof verification.



#### 2.1.4. Merkle Consistency Proofs

Merkle consistency proofs prove the append-only property of the tree. A Merkle consistency proof for a Merkle Tree Hash  $MTH(D_n)$  and a previously advertised hash  $MTH(D[0:m])$  of the first  $m$  leaves,  $m \leq n$ , is the list of nodes in the Merkle Tree required to verify that the first  $m$  inputs  $D[0:m]$  are equal in both trees. Thus, a consistency proof must contain a set of intermediate nodes (i.e., commitments to inputs) sufficient to verify  $MTH(D_n)$ , such that (a subset of) the same nodes can be used to verify  $MTH(D[0:m])$ . We define an algorithm that outputs the (unique) minimal consistency proof.

##### 2.1.4.1. Generating a Consistency Proof

Given an ordered list of  $n$  inputs to the tree,  $D_n = \{d[0], d[1], \dots, d[n-1]\}$ , the Merkle consistency proof  $PROOF(m, D_n)$  for a previous Merkle Tree Hash  $MTH(D[0:m])$ ,  $0 < m < n$ , is defined as:

$PROOF(m, D_n) = SUBPROOF(m, D_n, \text{true})$

In  $SUBPROOF$ , the boolean value represents whether the subtree created from  $D[0:m]$  is a complete subtree of the Merkle Tree created from  $D_n$ , and, consequently, whether the subtree Merkle Tree Hash  $MTH(D[0:m])$  is known. The initial call to  $SUBPROOF$  sets this to be true, and  $SUBPROOF$  is then defined as follows:

The subproof for  $m = n$  is empty if  $m$  is the value for which  $PROOF$  was originally requested (meaning that the subtree created from  $D[0:m]$  is a complete subtree of the Merkle Tree created from the original  $D_n$  for which  $PROOF$  was requested, and the subtree Merkle Tree Hash  $MTH(D[0:m])$  is known):

$SUBPROOF(m, D_m, \text{true}) = \{\}$

Otherwise, the subproof for  $m = n$  is the Merkle Tree Hash committing inputs  $D[0:m]$ :

$SUBPROOF(m, D_m, \text{false}) = \{MTH(D_m)\}$

For  $m < n$ , let  $k$  be the largest power of two smaller than  $n$ . The subproof is then defined recursively, using the appropriate step below:

If  $m \leq k$ , the right subtree entries  $D[k:n]$  only exist in the current tree. We prove that the left subtree entries  $D[0:k]$  are consistent and add a commitment to  $D[k:n]$ :

$SUBPROOF(m, D_n, b) = SUBPROOF(m, D[0:k], b) : MTH(D[k:n])$



If  $m > k$ , the left subtree entries  $D[0:k]$  are identical in both trees. We prove that the right subtree entries  $D[k:n]$  are consistent and add a commitment to  $D[0:k]$ .

$$\text{SUBPROOF}(m, D_n, b) = \text{SUBPROOF}(m - k, D[k:n], \text{false}) : \text{MTH}(D[0:k])$$

The number of nodes in the resulting proof is bounded above by  $\text{ceil}(\log_2(n)) + 1$ .

The  $:$  operator and  $D[k_1:k_2]$  are defined the same as in [Section 2.1.1](#).

#### **2.1.4.2. Verifying Consistency between Two Tree Heads**

When a client has a tree head "first\_hash" for tree size "first", a tree head "second\_hash" for tree size "second" where " $0 < \text{first} < \text{second}$ ", and has received a consistency proof between the two (e.g., in a "TransItem" of type "consistency\_proof\_v2"), the following algorithm may be used to verify the consistency proof:

1. If "consistency\_path" is an empty array, stop and fail the proof verification.
2. If "first" is an exact power of 2, then prepend "first\_hash" to the "consistency\_path" array.
3. Set "fn" to "first - 1" and "sn" to "second - 1".
4. If "LSB(fn)" is set, then right-shift both "fn" and "sn" equally until "LSB(fn)" is not set.
5. Set both "fr" and "sr" to the first value in the "consistency\_path" array.
6. For each subsequent value "c" in the "consistency\_path" array:

If "sn" is 0, stop the iteration and fail the proof verification.

If "LSB(fn)" is set, or if "fn" is equal to "sn", then:

1. Set "fr" to "HASH(0x01 || c || fr)"  
Set "sr" to "HASH(0x01 || c || sr)"
2. If "LSB(fn)" is not set, then right-shift both "fn" and "sn" equally until either "LSB(fn)" is set or "fn" is "0".

Otherwise:




1. Set "sr" to "HASH(0x01 || sr || c)"

Finally, right-shift both "fn" and "sn" one time.

7. After completing iterating through the "consistency\_path" array as described above, verify that the "fr" calculated is equal to the "first\_hash" supplied, that the "sr" calculated is equal to the "second\_hash" supplied and that "sn" is 0.

#### [2.1.5.](#) Example

The binary Merkle Tree with 7 leaves:

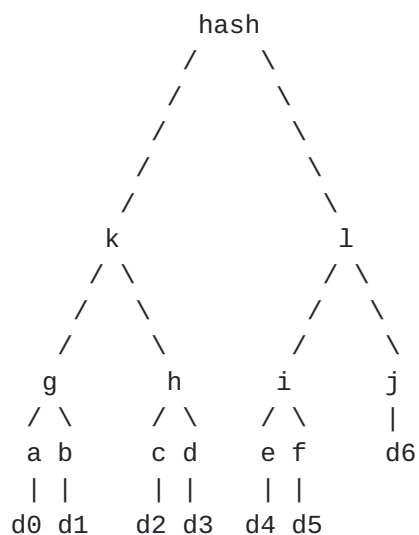

The inclusion proof for d0 is [b, h, l].

The inclusion proof for d3 is [c, g, l].


The inclusion proof for d4 is [f, j, k].

The inclusion proof for d6 is [i, k].

The same tree, built incrementally in four steps:





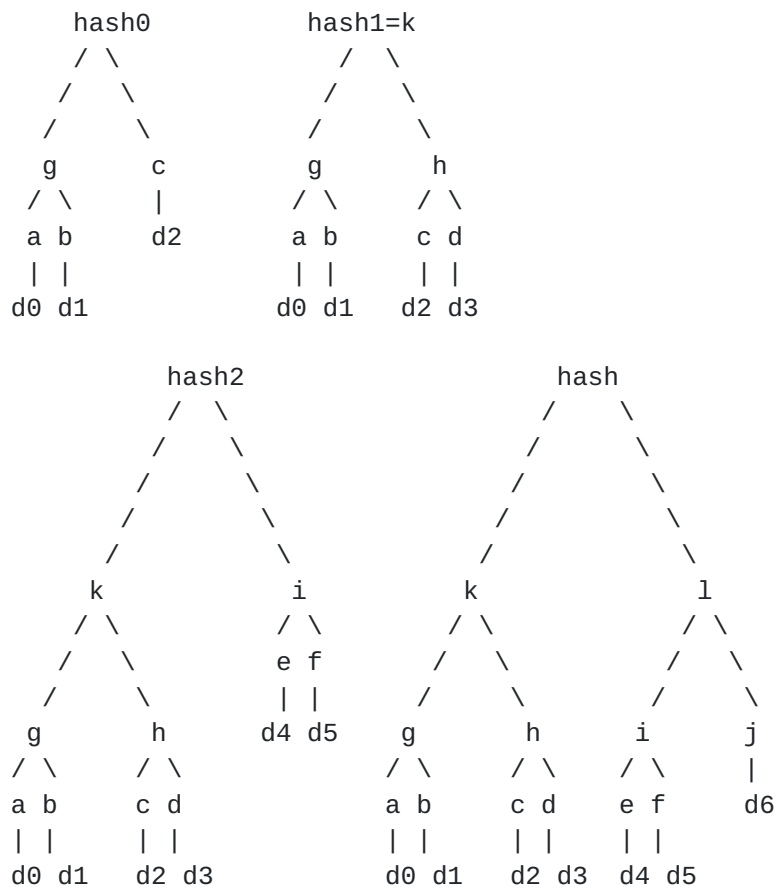

The consistency proof between hash0 and hash is  $\text{PROOF}(3, D[7]) = [c, d, g, l]$ .  $c, g$  are used to verify hash0, and  $d, l$  are additionally used to show hash is consistent with hash0.

The consistency proof between hash1 and hash is  $\text{PROOF}(4, D[7]) = [l]$ . hash can be verified using hash1=k and  $l$ .

The consistency proof between hash2 and hash is  $\text{PROOF}(6, D[7]) = [i, j, k]$ .  $k, i$  are used to verify hash2, and  $j$  is additionally used to show hash is consistent with hash2.

## 2.2. Signatures

When signing data structures, a log MUST use one of the signature algorithms from the IANA CT Signature Algorithms registry, described in [Section 10.2.2](#).



### **3. Submitters**

Submitters submit certificates or preannouncements of certificates prior to issuance (precertificates) to logs for public auditing, as described below. In order to enable attribution of each logged certificate or precertificate to its issuer, each submission MUST be accompanied by all additional certificates required to verify the chain up to an accepted trust anchor ([Section 5.7](#)). The trust anchor (a root or intermediate CA certificate) MAY be omitted from the submission.

If a log accepts a submission, it will return a Signed Certificate Timestamp (SCT) (see [Section 4.8](#)). The submitter SHOULD validate the returned SCT as described in [Section 8.1](#) if they understand its format and they intend to use it directly in a TLS handshake or to construct a certificate. If the submitter does not need the SCT (for example, the certificate is being submitted simply to make it available in the log), it MAY validate the SCT.

#### **3.1. Certificates**

Any entity can submit a certificate ([Section 5.1](#)) to a log. Since it is anticipated that TLS clients will reject certificates that are not logged, it is expected that certificate issuers and subjects will be strongly motivated to submit them.

#### **3.2. Precertificates**

CAs may preannounce a certificate prior to issuance by submitting a precertificate ([Section 5.1](#)) that the log can use to create an entry that will be valid against the issued certificate. The CA MAY incorporate the returned SCT in the issued certificate. One example of where the returned SCT is not incorporated in the issued certificate is when a CA sends the precertificate to multiple logs, but only incorporates the SCTs that are returned first.

A precertificate is a CMS [[RFC5652](#)] "signed-data" object that conforms to the following profile:

- \* It MUST be DER encoded as described in [[X690](#)].
- \* "SignedData.version" MUST be v3(3).
- \* "SignedData.digestAlgorithms" MUST be the same as the "SignerInfo.digestAlgorithm" OID value (see below).
- \* "SignedData.encapContentInfo":



- "eContentType" MUST be the OID 1.3.101.78.
- "eContent" MUST contain a TBSCertificate [[RFC5280](#)] that will be identical to the TBSCertificate in the issued certificate, except that the Transparency Information ([Section 7.1](#)) extension MUST be omitted.
- \* "SignedData.certificates" MUST be omitted.
- \* "SignedData.crls" MUST be omitted.
- \* "SignedData.signerInfos" MUST contain one "SignerInfo":
  - "version" MUST be v3(3).
  - "sid" MUST use the "subjectKeyIdentifier" option.
  - "digestAlgorithm" MUST be one of the hash algorithm OIDs listed in the IANA CT Hash Algorithms Registry, described in [Section 10.2.1](#).
  - "signedAttrs" MUST be present and MUST contain two attributes:
    - o A content-type attribute whose value is the same as "SignedData.encapContentInfo.eContentType".
    - o A message-digest attribute whose value is the message digest of "SignedData.encapContentInfo.eContent".
  - "signatureAlgorithm" MUST be the same OID as "TBSCertificate.signature".
  - "signature" MUST be from the same (root or intermediate) CA that intends to issue the corresponding certificate (see [Section 3.2.1](#)).
  - "unsignedAttrs" MUST be omitted.

"SignerInfo.signedAttrs" is included in the message digest calculation process (see [Section 5.4 of \[RFC5652\]](#)), which ensures that the "SignerInfo.signature" value will not be a valid X.509v3 signature that could be used in conjunction with the TBSCertificate (from "SignedData.encapContentInfo.eContent") to construct a valid certificate.



### **3.2.1. Binding Intent to Issue**

Under normal circumstances, there will be a short delay between precertificate submission and issuance of the corresponding certificate. Longer delays are to be expected occasionally (e.g., due to log server downtime), and in some cases the CA might not actually issue the corresponding certificate. Nevertheless, a precertificate's "signature" indicates the CA's binding intent to issue the corresponding certificate, which means that:

- \* Misissuance of a precertificate is considered equivalent to misissuance of the corresponding certificate. The CA should expect to be held to account, even if the corresponding certificate has not actually been issued.
- \* Upon observing a precertificate, a client can reasonably presume that the corresponding certificate has been issued. A client may wish to obtain status information (e.g., by using the Online Certificate Status Protocol [[RFC6960](#)] or by checking a Certificate Revocation List [[RFC5280](#)]) about a certificate that is presumed to exist, especially if there is evidence or suspicion that the corresponding precertificate was misissued.
- \* TLS clients may have policies that require CAs to be able to revoke, and to provide certificate status services for, each certificate that is presumed to exist based on the existence of a corresponding precertificate.

## **4. Log Format and Operation**

A log is a single, append-only Merkle Tree of submitted certificate and precertificate entries.

When it receives and accepts a valid submission, the log MUST return an SCT that corresponds to the submitted certificate or precertificate. If the log has previously seen this valid submission, it SHOULD return the same SCT as it returned before, as discussed in [Section 11.3](#). If different SCTs are produced for the same submission, multiple log entries will have to be created, one for each SCT (as the timestamp is a part of the leaf structure). Note that if a certificate was previously logged as a precertificate, then the precertificate's SCT of type "precert\_sct\_v2" would not be appropriate; instead, a fresh SCT of type "x509\_sct\_v2" should be generated.





An SCT is the log's promise to append to its Merkle Tree an entry for the accepted submission. Upon producing an SCT, the log MUST fulfil this promise by performing the following actions within a fixed amount of time known as the Maximum Merge Delay (MMD), which is one of the log's parameters (see [Section 4.1](#)):

- \* Allocate a tree index to the entry representing the accepted submission.
- \* Calculate the root of the tree.
- \* Sign the root of the tree (see [Section 4.10](#)).

The log may append multiple entries before signing the root of the tree.

Log operators SHOULD NOT impose any conditions on retrieving or sharing data from the log.

#### [4.1](#). Log Parameters

A log is defined by a collection of immutable parameters, which are used by clients to communicate with the log and to verify log artifacts. Except for the Final Signed Tree Head (STH), each of these parameters MUST be established before the log operator begins to operate the log.

**Base URL:** The prefix used to construct URLs ([\[RFC3986\]](#)) for client messages (see [Section 5](#)). The base URL MUST be an "https" URL, MAY contain a port, MAY contain a path with any number of path segments, but MUST NOT contain a query string, fragment, or trailing "/". Example: `https://ct.example.org/blue`

**Hash Algorithm:** The hash algorithm used for the Merkle Tree (see [Section 10.2.1](#)).

**Signature Algorithm:** The signature algorithm used (see [Section 2.2](#)).

**Public Key:** The public key used to verify signatures generated by the log. A log MUST NOT use the same keypair as any other log.

**Log ID:** The OID that uniquely identifies the log.

**Maximum Merge Delay:** The MMD the log has committed to. This document deliberately does not specify any limits on the value, to allow for experimentation.

**Version:** The version of the protocol supported by the log (currently



1 or 2).

**Maximum Chain Length:** The longest certificate chain submission the log is willing to accept, if the log imposes any limit.

**STH Frequency Count:** The maximum number of STHs the log may produce in any period equal to the "Maximum Merge Delay" (see [Section 4.10](#)).

**Final STH:** If a log has been closed down (i.e., no longer accepts new entries), existing entries may still be valid. In this case, the client should know the final valid STH in the log to ensure no new entries can be added without detection. This value **MUST** be provided in the form of a TransItem of type "signed\_tree\_head\_v2". If a log is still accepting entries, this value should not be provided.

[JSON.Metadata] is an example of a metadata format which includes the above elements.

## **[4.2.](#) Evaluating Submissions**

A log determines whether to accept or reject a submission by evaluating it against the minimum acceptance criteria (see [Section 4.2.1](#)) and against the log's discretionary acceptance criteria (see [Section 4.2.2](#)).

If the acceptance criteria are met, the log **SHOULD** accept the submission. (A log may decide, for example, to temporarily reject acceptable submissions to protect itself against denial-of-service attacks).

The log **SHALL** allow retrieval of its list of accepted trust anchors (see [Section 5.7](#)), each of which is a root or intermediate CA certificate. This list might usefully be the union of root certificates trusted by major browser vendors.

### **[4.2.1.](#) Minimum Acceptance Criteria**

To ensure that logged certificates and precertificates are attributable to an accepted trust anchor, and to set clear expectations for what monitors would find in the log, and to avoid being overloaded by invalid submissions, the log **MUST** reject a submission if any of the following conditions are not met:



- \* The "submission", "type" and "chain" inputs MUST be set as described in [Section 5.1](#). The log MUST NOT accommodate misordered CA certificates or use any other source of intermediate CA certificates to attempt certification path construction.
- \* Each of the zero or more intermediate CA certificates in the chain MUST have one or both of the following features:
  - The Basic Constraints extension with the cA boolean asserted.
  - The Key Usage extension with the keyCertSign bit asserted.
- \* Each certificate in the chain MUST fall within the limits imposed by the zero or more Basic Constraints pathLenConstraint values found higher up the chain.
- \* Precertificate submissions MUST conform to all of the requirements in [Section 3.2](#).

#### **[4.2.2](#). Discretionary Acceptance Criteria**

If the minimum acceptance criteria are met but the submission is not fully valid according to [\[RFC5280\]](#) verification rules (e.g., the certificate or precertificate has expired, is not yet valid, has been revoked, exhibits ASN.1 DER encoding errors but the log can still parse it, etc), then the acceptability of the submission is left to the log's discretion. It is useful for logs to accept such submissions in order to accommodate quirks of CA certificate-issuing software and to facilitate monitoring of CA compliance with applicable policies and technical standards. However, it is impractical for this document to enumerate, and for logs to consider, all of the ways that a submission might fail to comply with [\[RFC5280\]](#).

Logs SHOULD limit the length of chain they will accept. The maximum chain length is one of the log's parameters (see [Section 4.1](#)).

#### **[4.3](#). Log Entries**

If a submission is accepted and an SCT issued, the accepting log MUST store the entire chain used for verification. This chain MUST include the certificate or precertificate itself, the zero or more intermediate CA certificates provided by the submitter, and the trust anchor used to verify the chain (even if it was omitted from the submission). The log MUST provide this chain for auditing upon request (see [Section 5.6](#)) so that the CA cannot avoid blame by logging a partial or empty chain. Each log entry is a "TransItem" structure of type "x509\_entry\_v2" or "precert\_entry\_v2". However, a



log may store its entries in any format. If a log does not store this "TransItem" in full, it must store the "timestamp" and "sct\_extensions" of the corresponding "TimestampedCertificateEntryDataV2" structure. The "TransItem" can be reconstructed from these fields and the entire chain that the log used to verify the submission.

#### **4.4. Log ID**

Each log is identified by an OID, which is one of the log's parameters (see [Section 4.1](#)) and which MUST NOT be used to identify any other log. A log's operator MUST either allocate the OID themselves or request an OID from the Log ID Registry (see [Section 10.2.5](#)). The only advantage of the registry is that the DER encoding can be small. (Recall that OID allocations do not require a central registration, although logs will most likely want to make themselves known to potential clients through out of band means.) Various data structures include the DER encoding of this OID, excluding the ASN.1 tag and length bytes, in an opaque vector:

```
opaque LogID<2..127>;
```

Note that the ASN.1 length and the opaque vector length are identical in size (1 byte) and value, so the full DER encoding (including the tag and length) of the OID can be reproduced simply by prepending an OBJECT IDENTIFIER tag (0x06) to the opaque vector length and contents.

The OID used to identify a log is limited such that the DER encoding of its value, excluding the tag and length, MUST be no longer than 127 octets.

#### **4.5. TransItem Structure**

Various data structures are encapsulated in the "TransItem" structure to ensure that the type and version of each one is identified in a common fashion:





```
enum {
    reserved(0),
    x509_entry_v2(1), precert_entry_v2(2),
    x509_sct_v2(3), precert_sct_v2(4),
    signed_tree_head_v2(5), consistency_proof_v2(6),
    inclusion_proof_v2(7),
    (65535)
} VersionedTransType;

struct {
    VersionedTransType versioned_type;
    select (versioned_type) {
        case x509_entry_v2: TimestampedCertificateEntryDataV2;
        case precert_entry_v2: TimestampedCertificateEntryDataV2;
        case x509_sct_v2: SignedCertificateTimestampDataV2;
        case precert_sct_v2: SignedCertificateTimestampDataV2;
        case signed_tree_head_v2: SignedTreeHeadDataV2;
        case consistency_proof_v2: ConsistencyProofDataV2;
        case inclusion_proof_v2: InclusionProofDataV2;
    } data;
} TransItem;
```

"versioned\_type" is a value from the IANA registry in [Section 10.2.3](#) that identifies the type of the encapsulated data structure and the earliest version of this protocol to which it conforms. This document is v2.

"data" is the encapsulated data structure. The various structures named with the "DataV2" suffix are defined in later sections of this document.

Note that "VersionedTransType" combines the v1 [[RFC6962](#)] type enumerations "Version", "LogEntryType", "SignatureType" and "MerkleLeafType". Note also that v1 did not define "TransItem", but this document provides guidelines (see [Appendix A](#)) on how v2 implementations can co-exist with v1 implementations.

Future versions of this protocol may reuse "VersionedTransType" values defined in this document as long as the corresponding data structures are not modified, and may add new "VersionedTransType" values for new or modified data structures.

#### [4.6.](#) Log Artifact Extensions



```
enum {
    reserved(65535)
} ExtensionType;

struct {
    ExtensionType extension_type;
    opaque extension_data<0..2^16-1>;
} Extension;
```

The "Extension" structure provides a generic extensibility for log artifacts, including Signed Certificate Timestamps ([Section 4.8](#)) and Signed Tree Heads ([Section 4.10](#)). The interpretation of the "extension\_data" field is determined solely by the value of the "extension\_type" field.

This document does not define any extensions, but it does establish a registry for future "ExtensionType" values (see [Section 10.2.4](#)). Each document that registers a new "ExtensionType" must specify the context in which it may be used (e.g., SCT, STH, or both) and describe how to interpret the corresponding "extension\_data".

#### [4.7.](#) Merkle Tree Leaves

The leaves of a log's Merkle Tree correspond to the log's entries (see [Section 4.3](#)). Each leaf is the leaf hash ([Section 2.1](#)) of a "TransItem" structure of type "x509\_entry\_v2" or "precert\_entry\_v2", which encapsulates a "TimestampedCertificateEntryDataV2" structure. Note that leaf hashes are calculated as `HASH(0x00 || TransItem)`, where the hash algorithm is one of the log's parameters.

```
opaque TBSCertificate<1..2^24-1>;

struct {
    uint64 timestamp;
    opaque issuer_key_hash<32..2^8-1>;
    TBSCertificate tbs_certificate;
    Extension sct_extensions<0..2^16-1>;
} TimestampedCertificateEntryDataV2;
```

"timestamp" is the date and time at which the certificate or precertificate was accepted by the log, in the form of a 64-bit unsigned number of milliseconds elapsed since the Unix Epoch (1 January 1970 00:00:00 UTC - see [[UNIXTIME](#)]), ignoring leap seconds, in network byte order. Note that the leaves of a log's Merkle Tree are not required to be in strict chronological order.



"issuer\_key\_hash" is the HASH of the public key of the CA that issued the certificate or precertificate, calculated over the DER encoding of the key represented as SubjectPublicKeyInfo [[RFC5280](#)]. This is needed to bind the CA to the certificate or precertificate, making it impossible for the corresponding SCT to be valid for any other certificate or precertificate whose TBSCertificate matches "tbs\_certificate". The length of the "issuer\_key\_hash" MUST match HASH\_SIZE.

"tbs\_certificate" is the DER encoded TBSCertificate from the submission. (Note that a precertificate's TBSCertificate can be reconstructed from the corresponding certificate as described in [Section 8.1.2](#)).

"sct\_extensions" is byte-for-byte identical to the SCT extensions of the corresponding SCT.

The type of the "TransItem" corresponds to the value of the "type" parameter supplied in the [Section 5.1](#) call.

#### **[4.8](#). Signed Certificate Timestamp (SCT)**

An SCT is a "TransItem" structure of type "x509\_sct\_v2" or "precert\_sct\_v2", which encapsulates a "SignedCertificateTimestampDataV2" structure:

```
struct {  
    LogID log_id;  
    uint64 timestamp;  
    Extension sct_extensions<0..2^16-1>;  
    opaque signature<1..2^16-1>;  
} SignedCertificateTimestampDataV2;
```

"log\_id" is this log's unique ID, encoded in an opaque vector as described in [Section 4.4](#).

"timestamp" is equal to the timestamp from the corresponding "TimestampedCertificateEntryDataV2" structure.

"sct\_extensions" is a vector of 0 or more SCT extensions. This vector MUST NOT include more than one extension with the same "extension\_type". The extensions in the vector MUST be ordered by the value of the "extension\_type" field, smallest value first. All SCT extensions are similar to non-critical X.509v3 extensions (i.e., the "mustUnderstand" field is not set), and a recipient SHOULD ignore any extension it does not understand. Furthermore, an implementation MAY choose to ignore any extension(s) that it does understand.



"signature" is computed over a "TransItem" structure of type "x509\_entry\_v2" or "precert\_entry\_v2" (see [Section 4.7](#)) using the signature algorithm declared in the log's parameters (see [Section 4.1](#)).

#### **[4.9.](#) Merkle Tree Head**

The log stores information about its Merkle Tree in a "TreeHeadDataV2":

```
opaque NodeHash<32..2^8-1>;

struct {
    uint64 timestamp;
    uint64 tree_size;
    NodeHash root_hash;
    Extension sth_extensions<0..2^16-1>;
} TreeHeadDataV2;
```

The length of NodeHash MUST match HASH\_SIZE of the log.

"timestamp" is the current date and time, using the format defined in {tree\_leaves}.

"tree\_size" is the number of entries currently in the log's Merkle Tree.

"root\_hash" is the root of the Merkle Hash Tree.

"sth\_extensions" is a vector of 0 or more STH extensions. This vector MUST NOT include more than one extension with the same "extension\_type". The extensions in the vector MUST be ordered by the value of the "extension\_type" field, smallest value first. If an implementation sees an extension that it does not understand, it SHOULD ignore that extension. Furthermore, an implementation MAY choose to ignore any extension(s) that it does understand.





#### **4.10. Signed Tree Head (STH)**

Periodically each log SHOULD sign its current tree head information (see [Section 4.9](#)) to produce an STH. When a client requests a log's latest STH (see [Section 5.2](#)), the log MUST return an STH that is no older than the log's MMD. However, since STHs could be used to mark individual clients (by producing a new STH for each query), a log MUST NOT produce STHs more frequently than its parameters declare (see [Section 4.1](#)). In general, there is no need to produce a new STH unless there are new entries in the log; however, in the event that a log does not accept any submissions during an MMD period, the log MUST sign the same Merkle Tree Hash with a fresh timestamp.

An STH is a "TransItem" structure of type "signed\_tree\_head\_v2", which encapsulates a "SignedTreeHeadDataV2" structure:

```
struct {
    LogID log_id;
    TreeHeadDataV2 tree_head;
    opaque signature<0..2^16-1>;
} SignedTreeHeadDataV2;
```

"log\_id" is this log's unique ID, encoded in an opaque vector as described in [Section 4.4](#).

The "timestamp" in "tree\_head" MUST be at least as recent as the most recent SCT timestamp in the tree. Each subsequent timestamp MUST be more recent than the timestamp of the previous update.

"tree\_head" contains the latest tree head information (see [Section 4.9](#)).

"signature" is computed over the "tree\_head" field using the signature algorithm declared in the log's parameters (see [Section 4.1](#)).

#### **4.11. Merkle Consistency Proofs**

To prepare a Merkle Consistency Proof for distribution to clients, the log produces a "TransItem" structure of type "consistency\_proof\_v2", which encapsulates a "ConsistencyProofDataV2" structure:



```
struct {
    LogID log_id;
    uint64 tree_size_1;
    uint64 tree_size_2;
    NodeHash consistency_path<0..2^16-1>;
} ConsistencyProofDataV2;
```

"log\_id" is this log's unique ID, encoded in an opaque vector as described in [Section 4.4](#).

"tree\_size\_1" is the size of the older tree.

"tree\_size\_2" is the size of the newer tree.

"consistency\_path" is a vector of Merkle Tree nodes proving the consistency of two STHs as described in {consistency}.

#### [4.12](#). Merkle Inclusion Proofs

To prepare a Merkle Inclusion Proof for distribution to clients, the log produces a "TransItem" structure of type "inclusion\_proof\_v2", which encapsulates an "InclusionProofDataV2" structure:

```
struct {
    LogID log_id;
    uint64 tree_size;
    uint64 leaf_index;
    NodeHash inclusion_path<0..2^16-1>;
} InclusionProofDataV2;
```

"log\_id" is this log's unique ID, encoded in an opaque vector as described in [Section 4.4](#).

"tree\_size" is the size of the tree on which this inclusion proof is based.

"leaf\_index" is the 0-based index of the log entry corresponding to this inclusion proof.

"inclusion\_path" is a vector of Merkle Tree nodes proving the inclusion of the chosen certificate or precertificate as described in {merkle\_inclusion\_proof}.



#### **4.13. Shutting down a log**

Log operators may decide to shut down a log for various reasons, such as deprecation of the signature algorithm. If there are entries in the log for certificates that have not yet expired, simply making TLS clients stop recognizing that log will have the effect of invalidating SCTs from that log. In order to avoid that, the following actions SHOULD be taken:

- \* Make it known to clients and monitors that the log will be frozen. This is not part of the API, so it will have to be done via a relevant out-of-band mechanism.
- \* Stop accepting new submissions (the error code "shutdown" should be returned for such requests).
- \* Once MMD from the last accepted submission has passed and all pending submissions are incorporated, issue a final STH and publish it as one of the log's parameters. Having an STH with a timestamp that is after the MMD has passed from the last SCT issuance allows clients to audit this log regularly without special handling for the final STH. At this point the log's private key is no longer needed and can be destroyed.
- \* Keep the log running until the certificates in all of its entries have expired or exist in other logs (this can be determined by scanning other logs or connecting to domains mentioned in the certificates and inspecting the SCTs served).

### **5. Log Client Messages**

Messages are sent as HTTPS GET or POST requests. Parameters for POSTs and all responses are encoded as JavaScript Object Notation (JSON) objects [[RFC8259](#)]. Parameters for GETs are encoded as order-independent key/value URL parameters, using the "application/x-www-form-urlencoded" format described in the "HTML 4.01 Specification" [[HTML401](#)]. Binary data is base64 encoded according to [section 4 of RFC4648](#) as specified in the individual messages.

Clients are configured with a log's base URL, which is one of the log's parameters. Clients construct URLs for requests by appending suffixes to this base URL. This structure places some degree of restriction on how log operators can deploy these services, as noted in [[RFC8820](#)]. However, operational experience with version 1 of this protocol has not indicated that these restrictions are a problem in practice.



Note that JSON objects and URL parameters may contain fields not specified here, to allow for experimentation. Any fields that are not understood SHOULD be ignored.

In practice, log servers may include multiple front-end machines. Since it is impractical to keep these machines in perfect sync, errors may occur that are caused by skew between the machines. Where such errors are possible, the front-end will return additional information (as specified below) making it possible for clients to make progress, if progress is possible. Front-ends MUST only serve data that is free of gaps (that is, for example, no front-end will respond with an STH unless it is also able to prove consistency from all log entries logged within that STH).

For example, when a consistency proof between two STHs is requested, the front-end reached may not yet be aware of one or both STHs. In the case where it is unaware of both, it will return the latest STH it is aware of. Where it is aware of the first but not the second, it will return the latest STH it is aware of and a consistency proof from the first STH to the returned STH. The case where it knows the second but not the first should not arise (see the "no gaps" requirement above).

If the log is unable to process a client's request, it MUST return an HTTP response code of 4xx/5xx (see [\[RFC7231\]](#)), and, in place of the responses outlined in the subsections below, the body SHOULD be a JSON Problem Details Object (see [\[RFC7807\] Section 3](#)), containing:

type: A URN reference identifying the problem. To facilitate automated response to errors, this document defines a set of standard tokens for use in the "type" field, within the URN namespace of: "urn:ietf:params:trans:error:".

detail: A human-readable string describing the error that prevented the log from processing the request, ideally with sufficient detail to enable the error to be rectified.

e.g., In response to a request of "<Base URL>/ct/v2/get-entries?start=100&end=99", the log would return a "400 Bad Request" response code with a body similar to the following:

```
{
  "type": "urn:ietf:params:trans:error:endBeforeStart",
  "detail": "'start' cannot be greater than 'end'"
}
```





Most error types are specific to the type of request and are defined in the respective subsections below. The one exception is the "malformed" error type, which indicates that the log server could not parse the client's request because it did not comply with this document:

+=====+=====+	
type	detail
+-----+-----+	
malformed	The request could not be parsed.
+-----+-----+	

Table 1

Clients SHOULD treat "500 Internal Server Error" and "503 Service Unavailable" responses as transient failures and MAY retry the same request without modification at a later date. Note that as per [\[RFC7231\]](#), in the case of a 503 response the log MAY include a "Retry-After:" header in order to request a minimum time for the client to wait before retrying the request. In the absence of this header, this document does not specify a minimum.

Clients SHOULD treat any 4xx error as a problem with the request and not attempt to resubmit without some modification to the request. The full status code MAY provide additional details.

This document deliberately does not provide more specific guidance on the use of HTTP status codes.

### **5.1. Submit Entry to Log**

POST <Base URL>/ct/v2/submit-entry

Inputs: submission: The base64 encoded certificate or precertificate.

type: The "VersionedTransType" integer value that indicates the type of the "submission": 1 for "x509\_entry\_v2", or 2 for "precert\_entry\_v2".

chain: An array of zero or more JSON strings, each of which is a base64 encoded CA certificate. The first element is the certifier of the "submission"; the second certifies the first; etc. The last element of "chain" (or, if "chain" is an empty array, the "submission") is certified by an accepted trust anchor.

Outputs: sct: A base64 encoded "TransItem" of type "x509\_sct\_v2" or



"precert\_sct\_v2", signed by this log, that corresponds to the "submission".

If the submitted entry is immediately appended to (or already exists in) this log's tree, then the log SHOULD also output:

sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log.

inclusion: A base64 encoded "TransItem" of type "inclusion\_proof\_v2" whose "inclusion\_path" array of Merkle Tree nodes proves the inclusion of the "submission" in the returned "sth".

Error codes:

type	detail
badSubmission	"submission" is neither a valid certificate nor a valid precertificate.
badType	"type" is neither 1 nor 2.
badChain	The first element of "chain" is not the certifier of the "submission", or the second element does not certify the first, etc.
badCertificate	One or more certificates in the "chain" are not valid (e.g., not properly encoded).
unknownAnchor	The last element of "chain" (or, if "chain" is an empty array, the "submission") both is not, and is not certified by, an accepted trust anchor.
shutdown	The log is no longer accepting submissions.

Table 2

If the version of "sct" is not v2, then a v2 client may be unable to verify the signature. It MUST NOT construe this as an error. This is to avoid forcing an upgrade of compliant v2 clients that do not use the returned SCTs.



If a log detects bad encoding in a chain that otherwise verifies correctly then the log MUST either log the certificate or return the "bad certificate" error. If the certificate is logged, an SCT MUST be issued. Logging the certificate is useful, because monitors ([Section 8.2](#)) can then detect these encoding errors, which may be accepted by some TLS clients.

If "submission" is an accepted trust anchor whose certifier is neither an accepted trust anchor nor the first element of "chain", then the log MUST return the "unknown anchor" error. A log is not able to generate an SCT for a submission if it does not have access to the issuer's public key.

If the returned "sct" is intended to be provided to TLS clients, then "sth" and "inclusion" (if returned) SHOULD also be provided to TLS clients. For example, if "type" was 2 (indicating "precert\_sct\_v2") then all three "TransItem"s could be embedded in the certificate.

## **5.2. Retrieve Latest Signed Tree Head**

GET <Base URL>/ct/v2/get-sth

No inputs.

Outputs: sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log, that is no older than the log's MMD.

## **5.3. Retrieve Merkle Consistency Proof between Two Signed Tree Heads**

GET <Base URL>/ct/v2/get-sth-consistency

Inputs: first: The tree\_size of the older tree, in decimal.

second: The tree\_size of the newer tree, in decimal (optional).

Both tree sizes must be from existing v2 STHs. However, because of skew, the receiving front-end may not know one or both of the existing STHs. If both are known, then only the "consistency" output is returned. If the first is known but the second is not (or has been omitted), then the latest known STH is returned, along with a consistency proof between the first STH and the latest. If neither are known, then the latest known STH is returned without a consistency proof.

Outputs: consistency: A base64 encoded "TransItem" of type



"consistency\_proof\_v2", whose "tree\_size\_1" MUST match the "first" input. If the "sth" output is omitted, then "tree\_size\_2" MUST match the "second" input. If "first" and "second" are equal and correspond to a known STH, the returned consistency proof MUST be empty (a "consistency\_path" array with zero elements).

sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log.

Note that no signature is required for the "consistency" output as it is used to verify the consistency between two STHs, which are signed.

Error codes:

+=====+=====+	
type	detail
+=====+=====+	
firstUnknown	"first" is before the latest known
	STH but is not from an existing STH.
+-----+-----+	
secondUnknown	"second" is before the latest known
	STH but is not from an existing STH.
+-----+-----+	
secondBeforeFirst	"second" is smaller than "first".
+-----+-----+	

Table 3

See [Section 2.1.4.2](#) for an outline of how to use the "consistency" output.

#### 5.4. Retrieve Merkle Inclusion Proof from Log by Leaf Hash

GET <Base URL>/ct/v2/get-proof-by-hash

Inputs: hash: A base64 encoded v2 leaf hash.

tree\_size: The tree\_size of the tree on which to base the proof, in decimal.

The "hash" must be calculated as defined in [Section 4.7](#). A v2 STH must exist for the "tree\_size". Because of skew, the front-end may not know the requested tree head. In that case, it will return the latest STH it knows, along with an inclusion proof to that STH. If the front-end knows the requested tree head then only "inclusion" is returned.





Outputs: inclusion: A base64 encoded "TransItem" of type "inclusion\_proof\_v2" whose "inclusion\_path" array of Merkle Tree nodes proves the inclusion of the certificate (as specified by the "hash" parameter) in the selected STH.

sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log.

Note that no signature is required for the "inclusion" output as it is used to verify inclusion in the selected STH, which is signed.

Error codes:

type	detail
hashUnknown	"hash" is not the hash of a known leaf (may be caused by skew or by a known certificate not yet merged).
treeSizeUnknown	"hash" is before the latest known STH but is not from an existing STH.

Table 4

See [Section 2.1.3.2](#) for an outline of how to use the "inclusion" output.

### 5.5. Retrieve Merkle Inclusion Proof, Signed Tree Head and Consistency Proof by Leaf Hash

GET <Base URL>/ct/v2/get-all-by-hash

Inputs: hash: A base64 encoded v2 leaf hash.

tree\_size: The tree\_size of the tree on which to base the proofs, in decimal.

The "hash" must be calculated as defined in [Section 4.7](#). A v2 STH must exist for the "tree\_size".

Because of skew, the front-end may not know the requested tree head or the requested hash, which leads to a number of cases:



+=====+	
Case	Response
+=====+	
latest STH < requested tree head	Return latest STH
+-----+	
latest STH > requested tree head	Return latest STH and a consistency proof between it and the requested tree head (see <a href="#">Section 5.3</a> )
+-----+	
index of requested hash < latest STH	Return "inclusion"
+-----+	

Table 5

Note that more than one case can be true, in which case the returned data is their union. It is also possible for none to be true, in which case the front-end MUST return an empty response.

Outputs: inclusion: A base64 encoded "TransItem" of type "inclusion\_proof\_v2" whose "inclusion\_path" array of Merkle Tree nodes proves the inclusion of the certificate (as specified by the "hash" parameter) in the selected STH.

sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log.

consistency: A base64 encoded "TransItem" of type "consistency\_proof\_v2" that proves the consistency of the requested tree head and the returned STH.

Note that no signature is required for the "inclusion" or "consistency" outputs as they are used to verify inclusion in and consistency of STHs, which are signed.

Errors are the same as in [Section 5.4](#).

See [Section 2.1.3.2](#) for an outline of how to use the "inclusion" output, and see [Section 2.1.4.2](#) for an outline of how to use the "consistency" output.

## 5.6. Retrieve Entries and STH from Log

GET <Base URL>/ct/v2/get-entries

Inputs: start: 0-based index of first entry to retrieve, in decimal.



end: 0-based index of last entry to retrieve, in decimal.

Outputs: entries: An array of objects, each consisting of

log\_entry: The base64 encoded "TransItem" structure of type "x509\_entry\_v2" or "precert\_entry\_v2" (see [Section 4.3](#)).

submitted\_entry: JSON object equivalent to inputs that were submitted to "submit-entry", with the addition of the trust anchor to the "chain" field if the submission did not include it.

sct: The base64 encoded "TransItem" of type "x509\_sct\_v2" or "precert\_sct\_v2" corresponding to this log entry.

sth: A base64 encoded "TransItem" of type "signed\_tree\_head\_v2", signed by this log.

Note that this message is not signed -- the "entries" data can be verified by constructing the Merkle Tree Hash corresponding to a retrieved STH. All leaves MUST be v2. However, a compliant v2 client MUST NOT construe an unrecognized TransItem type as an error. This means it may be unable to parse some entries, but note that each client can inspect the entries it does recognize as well as verify the integrity of the data by treating unrecognized leaves as opaque input to the tree.

The "start" and "end" parameters SHOULD be within the range  $0 \leq x < \text{"tree\_size"}$  as returned by "get-sth" in [Section 5.2](#).

The "start" parameter MUST be less than or equal to the "end" parameter.

Each "submitted\_entry" output parameter MUST include the trust anchor that the log used to verify the "submission", even if that trust anchor was not provided to "submit-entry" (see [Section 5.1](#)). If the "submission" does not certify itself, then the first element of "chain" MUST be present and MUST certify the "submission".

Log servers MUST honor requests where  $0 \leq \text{"start"} < \text{"tree\_size"}$  and  $\text{"end"} \geq \text{"tree\_size"}$  by returning a partial response covering only the valid entries in the specified range.  $\text{"end"} \geq \text{"tree\_size"}$  could be caused by skew. Note that the following restriction may also apply:

Logs MAY restrict the number of entries that can be retrieved per "get-entries" request. If a client requests more than the permitted number of entries, the log SHALL return the maximum number of entries



permissible. These entries SHALL be sequential beginning with the entry specified by "start". Note that limit on the number of entries is not immutable and therefore the restriction may be changed or lifted at any time and is not listed with the other Log Parameters in [Section 4.1](#).

Because of skew, it is possible the log server will not have any entries between "start" and "end". In this case it MUST return an empty "entries" array.

In any case, the log server MUST return the latest STH it knows about.

See [Section 2.1.2](#) for an outline of how to use a complete list of "log\_entry" entries to verify the "root\_hash".

Error codes:

+=====+=====+	
type	detail
+=====+=====+	
startUnknown	"start" is greater than the number
	of entries in the Merkle tree.
+-----+-----+	
endBeforeStart	"start" cannot be greater than
	"end".
+-----+-----+	

Table 6

## 5.7. Retrieve Accepted Trust Anchors

GET <Base URL>/ct/v2/get-anchors

No inputs.

Outputs: certificates: An array of JSON strings, each of which is a base64 encoded CA certificate that is acceptable to the log.  
max\_chain\_length:

If the server has chosen to limit the length of chains it accepts, this is the maximum number of certificates in the chain, in decimal. If there is no limit, this is omitted.

This data is not signed and the protocol depends on the security guarantees of TLS to ensure correctness.





## 6. TLS Servers

CT-using TLS servers MUST use at least one of the mechanisms described below to present one or more SCTs from one or more logs to each TLS client during full TLS handshakes, where each SCT corresponds to the server certificate. (Of course, a server can only send a TLS extension if the client has specified it first.) Servers SHOULD also present corresponding inclusion proofs and STHs.

A server can provide SCTs using a TLS 1.3 extension ([Section 4.2 of \[RFC8446\]](#)) with type "transparency\_info" (see [Section 6.5](#)). This mechanism allows TLS servers to participate in CT without the cooperation of CAs, unlike the other two mechanisms. It also allows SCTs and inclusion proofs to be updated on the fly.

The server may also use an Online Certificate Status Protocol (OCSP) [\[RFC6960\]](#) response extension (see [Section 7.1.1](#)), providing the OCSP response as part of the TLS handshake. Providing a response during a TLS handshake is popularly known as "OCSP stapling." For TLS 1.3, the information is encoded as an extension in the "status\_request" extension data; see [Section 4.4.2.1 of \[RFC8446\]](#). For TLS 1.2 ([\[RFC5246\]](#)), the information is encoded as an extension in the "CertificateStatus" message; see [Section 8 of \[RFC6066\]](#). Using stapling also allows SCTs and inclusion proofs to be updated on the fly.

CT information can also be encoded as an extension in the X.509v3 certificate (see [Section 7.1.2](#)). This mechanism allows the use of unmodified TLS servers, but the SCTs and inclusion proofs cannot be updated on the fly. Since the logs from which the SCTs and inclusion proofs originated won't necessarily be accepted by TLS clients for the full lifetime of the certificate, there is a risk that TLS clients may subsequently consider the certificate to be non-compliant and in need of re-issuance or the use of one of the other two methods for delivering CT information.

### 6.1. TLS Client Authentication

This specification includes no description of how a TLS server can use CT for TLS client certificates. While this may be useful, it is not documented here for the following reasons:

- \* The greater security exposure is for clients to end up interacting with an illegitimate server.
- \* In general, TLS client certificates are not expected to be submitted to CT logs, particularly those intended for general public use.



A future version could include such information.

## 6.2. Multiple SCTs

CT-using TLS servers SHOULD send SCTs from multiple logs, because:

- \* One or more logs may not have become acceptable to all CT-using TLS clients. Note that client discovery, trust, and distrust of logs is expected to be handled out-of-band and is out of scope of this document.
- \* If a CA and a log collude, it is possible to temporarily hide misissuance from clients. When a TLS client requires SCTs from multiple logs to be provided, it is more difficult to mount this attack.
- \* If a log misbehaves or suffers a key compromise, a consequence may be that clients cease to trust it. Since the time an SCT may be in use can be considerable (several years is common in current practice when embedded in a certificate), including SCTs from multiple logs reduces the probability of the certificate being rejected by TLS clients.
- \* TLS clients may have policies related to the above risks requiring TLS servers to present multiple SCTs. For example, at the time of writing, Chromium [[Chromium.Log.Policy](#)] requires multiple SCTs to be presented with EV certificates in order for the EV indicator to be shown.

To select the logs from which to obtain SCTs, a TLS server can, for example, examine the set of logs popular TLS clients accept and recognize.

## 6.3. TransItemList Structure

Multiple SCTs, inclusion proofs, and indeed "TransItem" structures of any type, are combined into a list as follows:

```
opaque SerializedTransItem<1..2^16-1>;

struct {
    SerializedTransItem trans_item_list<1..2^16-1>;
} TransItemList;
```



Here, "SerializedTransItem" is an opaque byte string that contains the serialized "TransItem" structure. This encoding ensures that TLS clients can decode each "TransItem" individually (so, for example, if there is a version upgrade, out-of-date clients can still parse old "TransItem" structures while skipping over new "TransItem" structures whose versions they don't understand).

#### **6.4. Presenting SCTs, inclusions proofs and STHs**

In each "TransItemList" that is sent during a TLS handshake, the TLS server MUST include a "TransItem" structure of type "x509\_sct\_v2" or "precert\_sct\_v2".

Presenting inclusion proofs and STHs in the TLS handshake helps to protect the client's privacy (see [Section 8.1.4](#)) and reduces load on log servers. Therefore, if the TLS server can obtain them, it SHOULD also include "TransItem"s of type "inclusion\_proof\_v2" and "signed\_tree\_head\_v2" in the "TransItemList".

#### **6.5. transparency\_info TLS Extension**

Provided that a TLS client includes the "transparency\_info" extension type in the ClientHello and the TLS server supports the "transparency\_info" extension:

- \* The TLS server MUST verify that the received "extension\_data" is empty.
- \* The TLS server MUST construct a "TransItemList" of relevant "TransItem"s (see [Section 6.4](#)), which SHOULD omit any "TransItem"s that are already embedded in the server certificate or the stapled OCSP response (see [Section 7.1](#)). If the constructed "TransItemList" is not empty, then the TLS server MUST include the "transparency\_info" extension with the "extension\_data" set to this "TransItemList". If the list is empty then the server SHOULD omit the "extension\_data" element, but MAY send it with an empty array.

TLS servers MUST only include this extension in the following messages:

- \* the ServerHello message (for TLS 1.2 or earlier).
- \* the Certificate or CertificateRequest message (for TLS 1.3).

TLS servers MUST NOT process or include this extension when a TLS session is resumed, since session resumption uses the original session information.



## **7. Certification Authorities**

### **7.1. Transparency Information X.509v3 Extension**

The Transparency Information X.509v3 extension, which has OID 1.3.101.75 and SHOULD be non-critical, contains one or more "TransItem" structures in a "TransItemList". This extension MAY be included in OSCP responses (see [Section 7.1.1](#)) and certificates (see [Section 7.1.2](#)). Since [RFC5280](#) requires the "extnValue" field (an OCTET STRING) of each X.509v3 extension to include the DER encoding of an ASN.1 value, a "TransItemList" MUST NOT be included directly. Instead, it MUST be wrapped inside an additional OCTET STRING, which is then put into the "extnValue" field:

TransparencyInformationSyntax ::= OCTET STRING

"TransparencyInformationSyntax" contains a "TransItemList".

#### **7.1.1. OSCP Response Extension**

A certification authority MAY include a Transparency Information X.509v3 extension in the "singleExtensions" of a "SingleResponse" in an OSCP response. All included SCTs and inclusion proofs MUST be for the certificate identified by the "certID" of that "SingleResponse", or for a precertificate that corresponds to that certificate.

#### **7.1.2. Certificate Extension**

A certification authority MAY include a Transparency Information X.509v3 extension in a certificate. All included SCTs and inclusion proofs MUST be for a precertificate that corresponds to this certificate.

### **7.2. TLS Feature X.509v3 Extension**

A certification authority SHOULD NOT issue any certificate that identifies the "transparency\_info" TLS extension in a TLS feature extension [[RFC7633](#)], because TLS servers are not required to support the "transparency\_info" TLS extension in order to participate in CT (see [Section 6](#)).

## **8. Clients**

There are various different functions clients of logs might perform. We describe here some typical clients and how they should function. Any inconsistency may be used as evidence that a log has not behaved correctly, and the signatures on the data structures prevent the log from denying that misbehavior.





All clients need various parameters in order to communicate with logs and verify their responses. These parameters are described in [Section 4.1](#), but note that this document does not describe how the parameters are obtained, which is implementation-dependent (see, for example, [[Chromium.Policy](#)]).

## **[8.1.](#) TLS Client**

### **[8.1.1.](#) Receiving SCTs and inclusion proofs**

TLS clients receive SCTs and inclusion proofs alongside or in certificates. CT-using TLS clients **MUST** implement all of the three mechanisms by which TLS servers may present SCTs (see [Section 6](#)).

TLS clients that support the "transparency\_info" TLS extension (see [Section 6.5](#)) **SHOULD** include it in ClientHello messages, with empty "extension\_data". If a TLS server includes the "transparency\_info" TLS extension when resuming a TLS session, the TLS client **MUST** abort the handshake.

### **[8.1.2.](#) Reconstructing the TBSCertificate**

Validation of an SCT for a certificate (where the "type" of the "TransItem" is "x509\_sct\_v2") uses the unmodified TBSCertificate component of the certificate.

Before an SCT for a precertificate (where the "type" of the "TransItem" is "precert\_sct\_v2") can be validated, the TBSCertificate component of the precertificate needs to be reconstructed from the TBSCertificate component of the certificate as follows:

- \* Remove the Transparency Information extension (see [Section 7.1](#)).
- \* Remove embedded v1 SCTs, identified by OID 1.3.6.1.4.1.11129.2.4.2 (see [section 3.3 of \[RFC6962\]](#)). This allows embedded v1 and v2 SCTs to co-exist in a certificate (see [Appendix A](#)).

### **[8.1.3.](#) Validating SCTs**

In order to make use of a received SCT, the TLS client **MUST** first validate it as follows:

- \* Compute the signature input by constructing a "TransItem" of type "x509\_entry\_v2" or "precert\_entry\_v2", depending on the SCT's "TransItem" type. The "TimestampedCertificateEntryDataV2" structure is constructed in the following manner:
  - "timestamp" is copied from the SCT.



- "tbs\_certificate" is the reconstructed TBSCertificate portion of the server certificate, as described in [Section 8.1.2](#).
  - "issuer\_key\_hash" is computed as described in [Section 4.7](#).
  - "sct\_extensions" is copied from the SCT.
- \* Verify the SCT's "signature" against the computed signature input using the public key of the corresponding log, which is identified by the "log\_id". The required signature algorithm is one of the log's parameters.

If the TLS client does not have the corresponding log's parameters, it cannot attempt to validate the SCT. When evaluating compliance (see [Section 8.1.6](#)), the TLS client will consider only those SCTs that it was able to validate.

Note that SCT validation is not a substitute for the normal validation of the server certificate and its chain.

#### **[8.1.4](#). Fetching inclusion proofs**

When a TLS client has validated a received SCT but does not yet possess a corresponding inclusion proof, the TLS client MAY request the inclusion proof directly from a log using "get-proof-by-hash" ([Section 5.4](#)) or "get-all-by-hash" ([Section 5.5](#)).

Note that fetching inclusion proofs directly from a log will disclose to the log which TLS server the client has been communicating with. This may be regarded as a significant privacy concern, and so it is preferable for the TLS server to send the inclusion proofs (see [Section 6.4](#)).

#### **[8.1.5](#). Validating inclusion proofs**

When a TLS client has received, or fetched, an inclusion proof (and an STH), it SHOULD proceed to verifying the inclusion proof to the provided STH. The TLS client SHOULD also verify consistency between the provided STH and an STH it knows about.

If the TLS client holds an STH that predates the SCT, it MAY, in the process of auditing, request a new STH from the log ([Section 5.2](#)), then verify it by requesting a consistency proof ([Section 5.3](#)). Note that if the TLS client uses "get-all-by-hash", then it will already have the new STH.



#### **8.1.6. Evaluating compliance**

It is up to a client's local policy to specify the quantity and form of evidence (SCTs, inclusion proofs or a combination) needed to achieve compliance and how to handle non-compliance.

A TLS client can only evaluate compliance if it has given the TLS server the opportunity to send SCTs and inclusion proofs by any of the three mechanisms that are mandatory to implement for CT-using TLS clients (see [Section 8.1.1](#)). Therefore, a TLS client **MUST NOT** evaluate compliance if it did not include both the "transparency\_info" and "status\_request" TLS extensions in the ClientHello.

#### **8.2. Monitor**

Monitors watch logs to check that they behave correctly, for certificates of interest, or both. For example, a monitor may be configured to report on all certificates that apply to a specific domain name when fetching new entries for consistency validation.

A monitor **MUST** at least inspect every new entry in every log it watches, and it **MAY** also choose to keep copies of entire logs.

To inspect all of the existing entries, the monitor **SHOULD** follow these steps once for each log:

1. Fetch the current STH ([Section 5.2](#)).
2. Verify the STH signature.
3. Fetch all the entries in the tree corresponding to the STH ([Section 5.6](#)).
4. If applicable, check each entry to see if it's a certificate of interest.
5. Confirm that the tree made from the fetched entries produces the same hash as that in the STH.

To inspect new entries, the monitor **SHOULD** follow these steps repeatedly for each log:

1. Fetch the current STH ([Section 5.2](#)). Repeat until the STH changes. This document does not specify the polling frequency, to allow for experimentation.
2. Verify the STH signature.



3. Fetch all the new entries in the tree corresponding to the STH ([Section 5.6](#)). If they remain unavailable for an extended period, then this should be viewed as misbehavior on the part of the log.
4. If applicable, check each entry to see if it's a certificate of interest.
5. Either:
  1. Verify that the updated list of all entries generates a tree with the same hash as the new STH.Or, if it is not keeping all log entries:
  1. Fetch a consistency proof for the new STH with the previous STH ([Section 5.3](#)).
  2. Verify the consistency proof.
  3. Verify that the new entries generate the corresponding elements in the consistency proof.
6. Repeat from step 1.

### **[8.3.](#) Auditing**

Auditing ensures that the current published state of a log is reachable from previously published states that are known to be good, and that the promises made by the log in the form of SCTs have been kept. Audits are performed by monitors or TLS clients.

In particular, there are four log behavior properties that should be checked:

- \* The Maximum Merge Delay (MMD).
- \* The STH Frequency Count.
- \* The append-only property.
- \* The consistency of the log view presented to all query sources.





A benign, conformant log publishes a series of STHs over time, each derived from the previous STH and the submitted entries incorporated into the log since publication of the previous STH. This can be proven through auditing of STHs. SCTs returned to TLS clients can be audited by verifying against the accompanying certificate, and using Merkle Inclusion Proofs, against the log's Merkle tree.

The action taken by the auditor if an audit fails is not specified, but note that in general if audit fails, the auditor is in possession of signed proof of the log's misbehavior.

A monitor ([Section 8.2](#)) can audit by verifying the consistency of STHs it receives, ensure that each entry can be fetched and that the STH is indeed the result of making a tree from all fetched entries.

A TLS client ([Section 8.1](#)) can audit by verifying an SCT against any STH dated after the SCT timestamp + the Maximum Merge Delay by requesting a Merkle inclusion proof ([Section 5.4](#)). It can also verify that the SCT corresponds to the server certificate it arrived with (i.e., the log entry is that certificate, or is a precertificate corresponding to that certificate).

Checking of the consistency of the log view presented to all entities is more difficult to perform because it requires a way to share log responses among a set of CT-using entities, and is discussed in [Section 11.3](#).

## **9.    Algorithm Agility**

It is not possible for a log to change any of its algorithms part way through its lifetime:

Signature algorithm: SCT signatures must remain valid so signature algorithms can only be added, not removed.

Hash algorithm: A log would have to support the old and new hash algorithms to allow backwards-compatibility with clients that are not aware of a hash algorithm change.

Allowing multiple signature or hash algorithms for a log would require that all data structures support it and would significantly complicate client implementation, which is why it is not supported by this document.



If it should become necessary to deprecate an algorithm used by a live log, then the log MUST be frozen as specified in [Section 4.13](#) and a new log SHOULD be started. Certificates in the frozen log that have not yet expired and require new SCTs SHOULD be submitted to the new log and the SCTs from that log used instead.

## **[10.](#) IANA Considerations**

The assignment policy criteria mentioned in this section refer to the policies outlined in [\[RFC8126\]](#).

### **[10.1.](#) Additions to existing registries**

This sub-section defines additions to existing registries.

#### **[10.1.1.](#) New Entry to the TLS ExtensionType Registry**

IANA is asked to add an entry for "transparency\_info(TBD)" to the "TLS ExtensionType Values" registry defined in [\[RFC8446\]](#), setting the "Recommended" value to "Y", setting the "TLS 1.3" value to "CH, CR, CT", and citing this document as the "Reference".

#### **[10.1.2.](#) URN Sub-namespace for TRANS errors** (urn:ietf:params:trans:error)

IANA is requested to add a new entry in the "IETF URN Sub-namespace for Registered Protocol Parameter Identifiers" registry, following the template in [\[RFC3553\]](#):

Registry name: trans:error

Specification: RFCXXXX

Repository: <https://www.iana.org/assignments/trans>

Index value: No transformation needed.

### **[10.2.](#) New CT-Related registries**

IANA is requested to add a new protocol registry, "Public Notary Transparency", to the list that appears at <https://www.iana.org/assignments/>

The rest of this section defines sub-registries to be created within the new Public Notary Transparency registry.



### 10.2.1. Hash Algorithms

IANA is asked to establish a registry of hash algorithm values, named "Hash Algorithms", that initially consists of:

Value	Hash Algorithm	OID	Reference / Assignment Policy
0x00	SHA-256	2.16.840.1.101.3.4.2.1	[ <a href="#">RFC6234</a> ]
0x01 - 0xDF	Unassigned		Specification Required
0xE0 - 0xEF	Reserved		Experimental Use
0xF0 - 0xFF	Reserved		Private Use

Table 7

The Designated Expert(s) should ensure that the proposed algorithm has a public specification and is suitable for use as a cryptographic hash algorithm with no known preimage or collision attacks. These attacks can damage the integrity of the log.

### 10.2.2. Signature Algorithms

IANA is asked to establish a registry of signature algorithm values, named "Signature Algorithms".

The following notes should be added:

- \* This is a subset of the TLS SignatureScheme Registry, limited to those algorithms that are appropriate for CT. A major advantage of this is leveraging the expertise of the TLS working group and its Designated Expert(s).
- \* The value "0x0403" appears twice. While this may be confusing, it is okay because the verification process is the same for both algorithms, and the choice of which to use when generating a signature is purely internal to the log server.

The registry should initially consist of:



SignatureScheme Value	Signature Algorithm	Reference / Assignment Policy
0x0000 - 0x0402	Unassigned	Expert Review
ecdsa_secp256r1_sha256(0x0403)	ECDSA (NIST P-256) with SHA-256	[ <a href="#">FIPS186-4</a> ]
ecdsa_secp256r1_sha256(0x0403)	Deterministic ECDSA (NIST P-256) with HMAC-SHA256	[ <a href="#">RFC6979</a> ]
0x0404 - 0x0806	Unassigned	Expert Review
ed25519(0x0807)	Ed25519 (PureEdDSA with the edwards25519 curve)	[ <a href="#">RFC8032</a> ]
0x0808 - 0xFDFD	Unassigned	Expert Review
0xFE00 - 0xFEFF	Reserved	Experimental Use
0xFF00 - 0xFFFF	Reserved	Private Use

Table 8

The Designated Expert(s) should ensure that the proposed algorithm has a public specification, has a value assigned to it in the TLS SignatureScheme Registry (that IANA was asked to establish in [[RFC8446](#)]) and is suitable for use as a cryptographic signature algorithm.

### 10.2.3. VersionedTransTypes

IANA is asked to establish a registry of "VersionedTransType" values, named "VersionedTransTypes".

The following note should be added:





- \* The 0x0000 value is reserved so that v1 SCTs are distinguishable from v2 SCTs and other "TransItem" structures.

The registry should initially consist of:

Value	Type and Version	Reference / Assignment Policy
0x0000	Reserved	[RFC6962]
0x0001	x509_entry_v2	RFCXXXX
0x0002	precert_entry_v2	RFCXXXX
0x0003	x509_sct_v2	RFCXXXX
0x0004	precert_sct_v2	RFCXXXX
0x0005	signed_tree_head_v2	RFCXXXX
0x0006	consistency_proof_v2	RFCXXXX
0x0007	inclusion_proof_v2	RFCXXXX
0x0008 - 0xDFFF	Unassigned	Specification Required
0xE000 - 0xEFFF	Reserved	Experimental Use
0xF000 - 0xFFFF	Reserved	Private Use

Table 9

The Designated Expert(s) should review the public specification to ensure that it is detailed enough to ensure implementation interoperability.

#### **10.2.4. Log Artifact Extension Registry**

IANA is asked to establish a registry of "ExtensionType" values, named "Log Artifact Extensions", that initially consists of:



ExtensionType	Status	Use	Reference / Assignment Policy
0x0000 - 0xDFFF	Unassigned	n/a	Specification Required
0xE000 - 0xEFFF	Reserved	n/a	Experimental Use
0xF000 - 0xFFFF	Reserved	n/a	Private Use

Table 10

The "Use" column should contain one or both of the following values:

- \* "SCT", for extensions specified for use in Signed Certificate Timestamps.
- \* "STH", for extensions specified for use in Signed Tree Heads.

The Designated Expert(s) should review the public specification to ensure that it is detailed enough to ensure implementation interoperability. They should also verify that the extension is appropriate to the contexts in which it is specified to be used (SCT, STH, or both).

#### 10.2.5. Log ID Registry

IANA is asked to establish a registry of Log IDs, named "Log ID Registry", that initially consists of:

Log ID	Log Base URL	Log Operator	Reference / Assignment Policy
1.3.101.8192 - 1.3.101.16383	Unassigned	Unassigned	First Come First Served
1.3.101.80.0 - 1.3.101.80.*	Unassigned	Unassigned	First Come First Served

Table 11



All OIDs in the range from 1.3.101.8192 to 1.3.101.16383 have been set aside for Log IDs. This is a limited resource of 8,192 OIDs, each of which has an encoded length of 4 octets.

The 1.3.101.80 arc has also been set assigned for LogIDs. This is an unlimited resource, but only the 128 OIDs from 1.3.101.80.0 to 1.3.101.80.127 have an encoded length of only 4 octets.

Each application for the allocation of a Log ID MUST be accompanied by:

- \* the Log's Base URL (see [Section 4.1](#)).
- \* the Log Operator's contact details.

IANA is asked to reject any request to update a Log ID or Log Base URL in this registry, because these fields are immutable (see [Section 4.1](#)).

IANA is asked to accept requests from log operators to update their contact details in this registry.

Since log operators can choose to not use this registry (see [Section 4.4](#)), it is not expected to be a global directory of all logs.

#### **[10.2.6](#). Error Types Registry**

IANA is requested to create a new registry for errors, the "Error Types" registry.

Requirements for this registry are Specification Required.

This registry should have the following three fields:

Field Name	Type	Reference
identifier	string	RFCXXXX
meaning	string	RFCXXXX
reference	string	RFCXXXX

Table 12

The initial values are as follows, taken from the text above:



Identifier	Meaning	Reference
malformed	The request could not be parsed.	RFCXXXX
badSubmission	"submission" is neither a valid certificate nor a valid precertificate	RFCXXXX
badType	"type" is neither 1 nor 2	RFCXXXX
badChain	The first element of "chain" is not the certifier of the "submission", or the second element does not certify the first, etc.	RFCXXXX
badCertificate	One or more certificates in the "chain" are not valid (e.g., not properly encoded)	RFCXXXX
unknownAnchor	The last element of "chain" (or, if "chain" is an empty array, the "submission") both is not, and is not certified by, an accepted trust anchor	RFCXXXX
shutdown	The log is no longer accepting submissions	RFCXXXX
firstUnknown	"first" is before the latest known STH but is not from an existing STH.	RFCXXXX
secondUnknown	"second" is before the latest known STH but is not from an existing STH.	RFCXXXX
secondBeforeFirst	"second" is smaller than "first".	RFCXXXX
hashUnknown	"hash" is not the hash of a known leaf (may be caused by skew or by a known certificate not yet merged).	RFCXXXX
treeSizeUnknown	"hash" is before the latest	RFCXXXX





	known STH but is not from an	
	existing STH.	
+-----+	+-----+	+-----+
startUnknown	"start" is greater than the	RFCXXXX
	number of entries in the	
	Merkle tree.	
+-----+	+-----+	+-----+
endBeforeStart	"start" cannot be greater	RFCXXXX
	than "end".	
+-----+	+-----+	+-----+

Table 13

## **11. Security Considerations**

With CAs, logs, and servers performing the actions described here, TLS clients can use logs and signed timestamps to reduce the likelihood that they will accept misissued certificates. If a server presents a valid signed timestamp for a certificate, then the client knows that a log has committed to publishing the certificate. From this, the client knows that monitors acting for the subject of the certificate have had some time to notice the misissuance and take some action, such as asking a CA to revoke a misissued certificate. A signed timestamp does not guarantee this though, since appropriate monitors might not have checked the logs or the CA might have refused to revoke the certificate.

In addition, if TLS clients will not accept unlogged certificates, then site owners will have a greater incentive to submit certificates to logs, possibly with the assistance of their CA, increasing the overall transparency of the system.

### **11.1. Misissued Certificates**

Misissued certificates that have not been publicly logged, and thus do not have a valid SCT, are not considered compliant. Misissued certificates that do have an SCT from a log will appear in that public log within the Maximum Merge Delay, assuming the log is operating correctly. Since a log is allowed to serve an STH of any age up to the MMD, the maximum period of time during which a misissued certificate can be used without being available for audit is twice the MMD.

### **11.2. Detection of Misissue**

The logs do not themselves detect misissued certificates; they rely instead on interested parties, such as domain owners, to monitor them and take corrective action when a misissue is detected.



### **11.3. Misbehaving Logs**

A log can misbehave in several ways. Examples include: failing to incorporate a certificate with an SCT in the Merkle Tree within the MMD; presenting different, conflicting views of the Merkle Tree at different times and/or to different parties; issuing STHs too frequently; mutating the signature of a logged certificate; and failing to present a chain containing the certifier of a logged certificate.

Violation of the MMD contract is detected by log clients requesting a Merkle inclusion proof ([Section 5.4](#)) for each observed SCT. These checks can be asynchronous and need only be done once per certificate. However, note that there may be privacy concerns (see [Section 8.1.4](#)).

Violation of the append-only property or the STH issuance rate limit can be detected by multiple clients comparing their instances of the Signed Tree Heads. This technique, known as "gossip," is an active area of research and not defined here. Proof of misbehavior in such cases would be: a series of STHs that were issued too closely together, proving violation of the STH issuance rate limit; or an STH with a root hash that does not match the one calculated from a copy of the log, proving violation of the append-only property.

Clients that report back SCTs can be tracked or traced if a log produces multiple STHs or SCTs with the same timestamp and data but different signatures. Logs SHOULD mitigate this risk by either:

- \* Using deterministic signature schemes, or
- \* Producing no more than one SCT for each distinct submission and no more than one STH for each distinct tree\_size. Each of these SCTs and STHs can be stored by the log and served to other clients that submit the same certificate or request the same STH.

### **11.4. Multiple SCTs**

By requiring TLS servers to offer multiple SCTs, each from a different log, TLS clients reduce the effectiveness of an attack where a CA and a log collude (see [Section 6.2](#)).



### **11.5.    Leakage of DNS Information**

Malicious monitors can use logs to learn about the existence of domain names that might not otherwise be easy to discover. Some subdomain labels may reveal information about the service and software for which the subdomain is used, which in turn might facilitate targeted attacks.

## **12.    Acknowledgements**

The authors would like to thank Erwann Abelea, Robin Alden, Andrew Ayer, Richard Barnes, Al Cutter, David Drysdale, Francis Dupont, Adam Eijdenberg, Stephen Farrell, Daniel Kahn Gillmor, Paul Hadfield, Brad Hill, Jeff Hodges, Paul Hoffman, Jeffrey Hutzelman, Kat Joyce, Stephen Kent, SM, Alexey Melnikov, Linus Nordberg, Chris Palmer, Trevor Perrin, Pierre Phaneuf, Eric Rescorla, Rich Salz, Melinda Shore, Ryan Sleevi, Martin Smith, Carl Wallace and Paul Wouters for their valuable contributions.

A big thank you to Symantec for kindly donating the OIDs from the 1.3.101 arc that are used in this document.

## **13.    References**

### **13.1.    Normative References**

- [FIPS186-4]      NIST, "FIPS PUB 186-4", 1 July 2013,  
                 <[http://nvlpubs.nist.gov/nistpubs/FIPS/  
NIST.FIPS.186-4.pdf](http://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.186-4.pdf)>.
- [HTML401]      Raggett, D., Le Hors, A., and I. Jacobs, "HTML 4.01  
Specification", World Wide Web Consortium Recommendation  
REC-html401-19991224, 24 December 1999,  
                 <<http://www.w3.org/TR/1999/REC-html401-19991224>>.
- [RFC2119]      Bradner, S., "Key words for use in RFCs to Indicate  
Requirement Levels", [BCP 14](#), [RFC 2119](#),  
DOI 10.17487/RFC2119, March 1997,  
                 <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3553]      Mealling, M., Masinter, L., Hardie, T., and G. Klyne, "An  
IETF URN Sub-namespace for Registered Protocol  
Parameters", [BCP 73](#), [RFC 3553](#), DOI 10.17487/RFC3553, June  
2003, <<https://www.rfc-editor.org/info/rfc3553>>.



- [RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, [RFC 3986](#), DOI 10.17487/RFC3986, January 2005, <<https://www.rfc-editor.org/info/rfc3986>>.
- [RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", [RFC 4648](#), DOI 10.17487/RFC4648, October 2006, <<https://www.rfc-editor.org/info/rfc4648>>.
- [RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", [RFC 5246](#), DOI 10.17487/RFC5246, August 2008, <<https://www.rfc-editor.org/info/rfc5246>>.
- [RFC5280] Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", [RFC 5280](#), DOI 10.17487/RFC5280, May 2008, <<https://www.rfc-editor.org/info/rfc5280>>.
- [RFC5652] Housley, R., "Cryptographic Message Syntax (CMS)", STD 70, [RFC 5652](#), DOI 10.17487/RFC5652, September 2009, <<https://www.rfc-editor.org/info/rfc5652>>.
- [RFC6066] Eastlake 3rd, D., "Transport Layer Security (TLS) Extensions: Extension Definitions", [RFC 6066](#), DOI 10.17487/RFC6066, January 2011, <<https://www.rfc-editor.org/info/rfc6066>>.
- [RFC6234] Eastlake 3rd, D. and T. Hansen, "US Secure Hash Algorithms (SHA and SHA-based HMAC and HKDF)", [RFC 6234](#), DOI 10.17487/RFC6234, May 2011, <<https://www.rfc-editor.org/info/rfc6234>>.
- [RFC6960] Santesson, S., Myers, M., Ankney, R., Malpani, A., Galperin, S., and C. Adams, "X.509 Internet Public Key Infrastructure Online Certificate Status Protocol - OCSP", [RFC 6960](#), DOI 10.17487/RFC6960, June 2013, <<https://www.rfc-editor.org/info/rfc6960>>.
- [RFC6979] Pornin, T., "Deterministic Usage of the Digital Signature Algorithm (DSA) and Elliptic Curve Digital Signature Algorithm (ECDSA)", [RFC 6979](#), DOI 10.17487/RFC6979, August 2013, <<https://www.rfc-editor.org/info/rfc6979>>.





- [RFC7231] Fielding, R., Ed. and J. Reschke, Ed., "Hypertext Transfer Protocol (HTTP/1.1): Semantics and Content", [RFC 7231](#), DOI 10.17487/RFC7231, June 2014, <<https://www.rfc-editor.org/info/rfc7231>>.
- [RFC7633] Hallam-Baker, P., "X.509v3 Transport Layer Security (TLS) Feature Extension", [RFC 7633](#), DOI 10.17487/RFC7633, October 2015, <<https://www.rfc-editor.org/info/rfc7633>>.
- [RFC7807] Nottingham, M. and E. Wilde, "Problem Details for HTTP APIs", [RFC 7807](#), DOI 10.17487/RFC7807, March 2016, <<https://www.rfc-editor.org/info/rfc7807>>.
- [RFC8032] Josefsson, S. and I. Liusvaara, "Edwards-Curve Digital Signature Algorithm (EdDSA)", [RFC 8032](#), DOI 10.17487/RFC8032, January 2017, <<https://www.rfc-editor.org/info/rfc8032>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8259] Bray, T., Ed., "The JavaScript Object Notation (JSON) Data Interchange Format", STD 90, [RFC 8259](#), DOI 10.17487/RFC8259, December 2017, <<https://www.rfc-editor.org/info/rfc8259>>.
- [RFC8391] Huelssing, A., Butin, D., Gazdag, S., Rijneveld, J., and A. Mohaisen, "XMSS: eXtended Merkle Signature Scheme", [RFC 8391](#), DOI 10.17487/RFC8391, May 2018, <<https://www.rfc-editor.org/info/rfc8391>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", [RFC 8446](#), DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [UNIXTIME] IEEE, "The Open Group Base Specifications Issue 7 IEEE Std 1003.1-2008, 2016 Edition", n.d., <[http://pubs.opengroup.org/onlinepubs/9699919799.2016edition/basedefs/V1\\_chap04.html#tag\\_04\\_16](http://pubs.opengroup.org/onlinepubs/9699919799.2016edition/basedefs/V1_chap04.html#tag_04_16)>.
- [X690] ITU-T, "Information technology - ASN.1 encoding Rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)", ISO/IEC 8825-1:2002, November 2015.

## **[13.2.](#) Informative References**



- [CABBR]      CA/Browser Forum, "Baseline Requirements for the Issuance and Management of Publicly-Trusted Certificates", 2020, <<https://cabforum.org/wp-content/uploads/CA-Browser-Forum-BR-1.7.3.pdf>>.
- [Chromium.Log.Policy]      The Chromium Projects, "Chromium Certificate Transparency Log Policy", 2014, <<http://www.chromium.org/Home/chromium-security/certificate-transparency/log-policy>>.
- [Chromium.Policy]      The Chromium Projects, "Chromium Certificate Transparency", 2014, <<http://www.chromium.org/Home/chromium-security/certificate-transparency>>.
- [CrosbyWallach]      Crosby, S. and D. Wallach, "Efficient Data Structures for Tamper-Evident Logging", Proceedings of the 18th USENIX Security Symposium, Montreal, August 2009, <[http://static.usenix.org/event/sec09/tech/full\\_papers/crosby.pdf](http://static.usenix.org/event/sec09/tech/full_papers/crosby.pdf)>.
- [JSON.Metadata]      The Chromium Projects, "Chromium Log Metadata JSON Schema", 2014, <[https://www.gstatic.com/ct/log\\_list/log\\_list\\_schema.json](https://www.gstatic.com/ct/log_list/log_list_schema.json)>.
- [RFC6962]      Laurie, B., Langley, A., and E. Kasper, "Certificate Transparency", [RFC 6962](#), DOI 10.17487/RFC6962, June 2013, <<https://www.rfc-editor.org/info/rfc6962>>.
- [RFC8126]      Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 8126](#), DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.
- [RFC8820]      Nottingham, M., "URI Design and Ownership", [BCP 190](#), [RFC 8820](#), DOI 10.17487/RFC8820, June 2020, <<https://www.rfc-editor.org/info/rfc8820>>.

## [Appendix A](#). Supporting v1 and v2 simultaneously (Informative)

Certificate Transparency logs have to be either v1 (conforming to [[RFC6962](#)]) or v2 (conforming to this document), as the data structures are incompatible and so a v2 log could not issue a valid v1 SCT.



CT clients, however, can support v1 and v2 SCTs, for the same certificate, simultaneously, as v1 SCTs are delivered in different TLS, X.509 and OCSP extensions than v2 SCTs.

v1 and v2 SCTs for X.509 certificates can be validated independently. For precertificates, v2 SCTs should be embedded in the TBSCertificate before submission of the TBSCertificate (inside a v1 precertificate, as described in [Section 3.1. of \[RFC6962\]](#)) to a v1 log so that TLS clients conforming to [\[RFC6962\]](#) but not this document are oblivious to the embedded v2 SCTs. An issuer can follow these steps to produce an X.509 certificate with embedded v1 and v2 SCTs:

- \* Create a CMS precertificate as described in [Section 3.2](#) and submit it to v2 logs.
- \* Embed the obtained v2 SCTs in the TBSCertificate, as described in [Section 7.1.2](#).
- \* Use that TBSCertificate to create a v1 precertificate, as described in [Section 3.1. of \[RFC6962\]](#) and submit it to v1 logs.
- \* Embed the v1 SCTs in the TBSCertificate, as described in [Section 3.3 of \[RFC6962\]](#).
- \* Sign that TBSCertificate (which now contains v1 and v2 SCTs) to issue the final X.509 certificate.

## [Appendix B](#). An ASN.1 Module (Informative)

The following ASN.1 module may be useful to implementors.

```
CertificateTransparencyV2Module-2021
-- { OID Needed, but no point in using a short one }
DEFINITIONS IMPLICIT TAGS ::= BEGIN

-- EXPORTS ALL --

IMPORTS
EXTENSION
FROM PKIX-CommonTypes-2009 -- RFC 5912
{ iso(1) identified-organization(3) dod(6) internet(1)
  security(5) mechanisms(5) pkix(7) id-mod(0)
  id-mod-pkixCommon-02(57) }

CONTENT-TYPE
FROM CryptographicMessageSyntax-2010 -- RFC 6268
{ iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1)
  pkcs-9(9) smime(16) modules(0) id-mod-cms-2009(58) }
```



```
TBSCertificate
FROM PKIX1Explicit-2009 -- RFC 5912
  { iso(1) identified-organization(3) dod(6) internet(1)
    security(5) mechanisms(5) pkix(7) id-mod(0)
    id-mod-pkix1-explicit-02(51) }
;

--
-- Section 3.2. Precertificates
--

ct-tbsCertificate CONTENT-TYPE ::= {
  TYPE TBSCertificate
  IDENTIFIED BY id-ct-tbsCertificate }

id-ct-tbsCertificate OBJECT IDENTIFIER ::= { 1 3 101 78 }

--
-- Section 7.1. Transparency Information X.509v3 Extension
--

ext-transparencyInfo EXTENSION ::= {
  SYNTAX TransparencyInformationSyntax
  IDENTIFIED BY id-ce-transparencyInfo
  CRITICALITY { FALSE } }

id-ce-transparencyInfo OBJECT IDENTIFIER ::= { 1 3 101 75 }

TransparencyInformationSyntax ::= OCTET STRING

--
-- Section 7.1.1. OCSP Response Extension
--

ext-ocsp-transparencyInfo EXTENSION ::= {
  SYNTAX TransparencyInformationSyntax
  IDENTIFIED BY id-pkix-ocsp-transparencyInfo
  CRITICALITY { FALSE } }

id-pkix-ocsp-transparencyInfo OBJECT IDENTIFIER ::=
  id-ce-transparencyInfo

--
-- Section 8.1.2. Reconstructing the TBSCertificate
--

ext-embeddedSCT-CTv1 EXTENSION ::= {
  SYNTAX SignedCertificateTimestampList
```





```
IDENTIFIED BY id-ce-embeddedSCT-CTv1
CRITICALITY { FALSE } }
```

```
id-ce-embeddedSCT-CTv1 OBJECT IDENTIFIER ::= {
    1 3 6 1 4 1 11129 2 4 2 }
```

```
SignedCertificateTimestampList ::= OCTET STRING
```

```
END
```

#### Authors' Addresses

Ben Laurie  
Google UK Ltd.

Email: [benl@google.com](mailto:benl@google.com)

Adam Langley  
Google Inc.

Email: [agl@google.com](mailto:agl@google.com)

Emilia Kasper  
Google Switzerland GmbH

Email: [ekasper@google.com](mailto:ekasper@google.com)

Eran Messeri  
Google UK Ltd.

Email: [eranm@google.com](mailto:eranm@google.com)

Rob Stradling  
Sectigo Ltd.

Email: [rob@sectigo.com](mailto:rob@sectigo.com)

