

Internet Draft

Deepak Kumar
T. Senevirathne
Norman Finn
Samer Salam
CISCO
Liang Xia
Weiguo Hao
Huawei

Category: Standard Track
Expires November 2015

November 01, 2015

YANG Data Model for TRILL Operations, Administration, and Maintenance (OAM)

[`draft-ietf-trill-yang-oam-03.txt`](#)

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on May 04, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Abstract

This document presents YANG Data model for TRILL OAM. It extends the Generic YANG model for OAM defined in [[GENYANGOAM](#)] with TRILL technology specifics. Table of Contents.

Table of Contents

1. Introduction	3
2. Conventions used in this document	3
2.1. Terminology	3
3. Architecture of OAM YANG Model and Relationship to TRILL OAM PM	4
4. TRILL extensions to Generic YANG Model	4
4.1 MEP Address	5
4.2 Flow Entropy	5
4.3 Context-id	5
4.5 RPC definition	5
5. OAM data hierarchy	6
6. OAM YANG module	8
7. Base Mode for TRILL OAM	17
8. Security Considerations	17
9. IANA Considerations	17
10. References	18
10.1. Normative References	18
10.2. Informative References	18
11. Acknowledgments	18
Authors' Addresses	18

[1. Introduction](#)

Fault Management for TRILL is defined in [[TRILLOAMFM](#)]. TRILL Fault Management utilizes the [[8021Q](#)] CFM model and extends CFM with technology specific details. Those technology specific extensions are flow-entropy for multipath support, MEP addressing on TRILL identifiers, and so on. The extensions are explained in detail in [[TRILLOAMFM](#)]. In this document, we extend the YANG model defined in [[GENYANGOAM](#)] with TRILL OAM specifics.

[2. Conventions used in this document](#) The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)]. In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying [RFC-2119](#) significance.[2.1. Terminology](#)

CCM - Continuity Check Message [[8021Q](#)]
ECMP - Equal Cost Multipath
LBM - Loopback Message [[8021Q](#)]
MP - Maintenance Point [[8021Q](#)]

Kumar, Deepak

Expires May 4, 2016

[Page 3]

MEP - Maintenance End Point [[TRLOAMFRM](#)] [[8021Q](#)] [[RFC6371](#)]
 MIP - Maintenance Intermediate Point [[TRLOAMFRM](#)] [[8021Q](#)] [[RFC6371](#)]
 MA - Maintenance Association [[8021Q](#)] [[TRLOAMFRM](#)]
 MD - Maintenance Domain [[8021Q](#)]
 MTV - Multi-destination Tree Verification Message
 OAM - Operations, Administration, and Maintenance [[RFC6291](#)]
 TRILL - Transparent Interconnection of Lots of Links [[RFC6325](#)]

[3. Architecture of OAM YANG Model and Relationship to TRILL OAM PM](#)

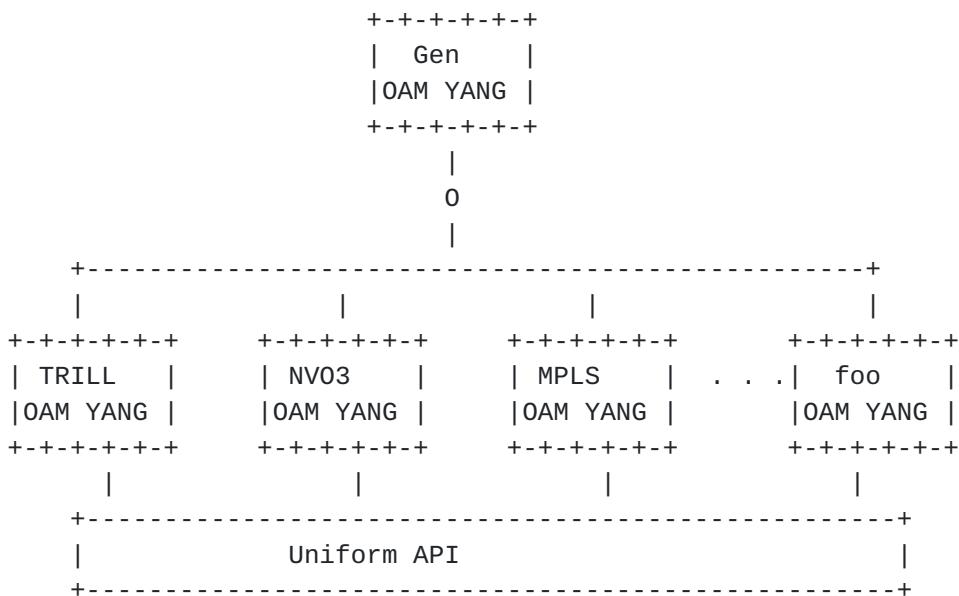


Figure 1 Relationship of TRILL OAM YANG model to Generic OAM YANG model

[4. TRILL extensions to Generic YANG Model](#)

The Technology parameter is defined in the [[GENYANGOAM](#)] as an identity. This allows easy extension of the YANG model by other technologies. Technology-specific extensions are applied only when the Technology parameter is set to the specific type. "trill" is defined as an identity that augments the base "technology-types".

```
identity trill {   base goam:technology-types;   description
"trill type"; }
```

Figure 2 Trill identity type.

Kumar, Deepak

Expires May 4, 2016

[Page 4]

4.1 MEP Address

In TRILL, the MEP address is the 2 octet RBridge Nickname. In [GENYANGOAM] MEP address is defined as a combination choice and case statement. We augment this to include TRILL RBridge nickname. augment "/goam:domains/goam:domain/goam:MA/goam:MA/goam:MEP/goam:mep-address" { case mep-address-trill { leaf mep-address-trill { when "/goam:domains/goam:domain/goam:technology='trill'" type tril-rb-nickname; } } }

Figure 3 Augment MEP address

4.2 Flow Entropy

In TRILL, flow-entropy is defined as a 96 octet field. [GENYANGOAM] defines a placeholder for flow-entropy. This allows other technologies to easily augment that to include technology-specific augmentations. Below figure depicts an example of augmenting flow-entropy to include TRILL flow-entropy. augment "/goam:domains/goam:domain/goam:MA/goam:MA/goam:flow-entropy" { case flow-entropy-trill { leaf flow-entropy-trill { type flow-entropy-trill; } } }

Figure 4 TRILL flow-entropy

4.3 Context-id

In TRILL, context-id is either 12 bit VLAN identifier or 24 bit fine-grained label. [GENYANGOAM] defines a placeholder for context-id. This allows other technologies to easily augment that to include technology specific extensions. The snippet below depicts an example of augmenting context-id to include the TRILL context-id.

```
augment
"/goam:domains/goam:domain/goam:MA/goam:MA/goam:MEP/goam:context-id"
{ case context-id-vlan { leaf context-id-vlan { type
vlan; } } case context-id-fgl { leaf context-id-fgl {
type fgl; } } }
```

Figure 5 TRILL context-id

4.5 RPC definition

The rpc model facilitates issuing commands to a NETCONF server (in this case to the device that needs to execute the OAM command) and obtaining a response. Grouping statement command-ext-trill defines the input extensions for TRILL. Multicast Tree Verification (MTV)

Kumar, Deepak

Expires May 4, 2016

[Page 5]

[TRILLOAMFM] rpc command, defined in TRILL YANG model, is TRILL specific and allows to verify connectivity as well as data-plane and control-plane integrity of TRILL multicast forwarding.

5. OAM data hierarchy

The complete data hierarchy related to the OAM YANG model is presented below. The following notations are used within the data tree and carry the meaning as noted below. Each node is printed as:
 <status> <flags> <name> <opts> <type>

<status> is one of: + for current x for deprecated o
 for obsolete

<flags> is one of: rw for configuration data ro for non-
 configuration data -x for rpcs -n for notifications

<name> is the name of the node

If the node is augmented into the tree from another module, its name is printed as <prefix>:<name>.

<opts> is one of: ? for an optional leaf or choice ! for a presence container * for a leaf-list or list [<keys>] for a list's keys

<type> is the name of the type for leafs and leaf-lists

```
module: ietf-trill-oam
augment
  /goam:domains/goam:domain/goam:MAss/goam:MA/goam:MEP/goam:mp-address:
    +--:(mep-address-trill)
      +-rw mep-address-trill? tril-rb-nickname
augment
  /goam:domains/goam:domain/goam:MAss/goam:MA/goam:connectivity-context:
    +--:(connectivity-context-vlan)
      | +-rw connectivity-context-vlan? vlan
    +--:(connectivity-context-fgl)
      +-rw connectivity-context-fgl? fgl
augment
  /goam:domains/goam:domain/goam:MAss/goam:MA/goam:flow-entropy:
    +--:(flow-entropy-trill)
      +-rw flow-entropy-trill? flow-entropy-trill
augment
  /goam:domains/goam:domain/goam:MAss/goam:MA/goam:
    MEP/goam:flow-entropy:
      +--:(flow-entropy-trill)
```

Kumar, Deepak

Expires May 4, 2016

[Page 6]

```
    +-rw flow-entropy-trill?  flow-entropy-trill
augment /goam:domains/goam:domain/goam:MAss/goam:MA/goam:MEP/goam:
session/goam:flow-entropy:
    +-(flow-entropy-trill)
        +-rw flow-entropy-trill?  flow-entropy-trill
augment /goam:continuity-check/goam:input:
    +-ro (out-of-band)?
    |  +-(ipv4-address)
    |  |  +-ro ipv4-address?      inet:ipv4-address
    |  +-(ipv6-address)
    |  |  +-ro ipv6-address?      inet:ipv6-address
    |  +-(trill-nickname)
    |  |  +-ro trill-nickname?   tril-rb-nickname
    +-ro diagnostic-vlan?  boolean
augment /goam:continuity-check/goam:input/goam:flow-entropy:
    +-(flow-entropy-trill)
        +-ro flow-entropy-trill?  flow-entropy-trill
augment /goam:continuity-check/goam:output:
    +-ro upstream-rbridge?  tril-rb-nickname
    +-ro next-hop-rbridge*  tril-rb-nickname
augment /goam:path-discovery/goam:input:
    +-ro (out-of-band)?
    |  +-(ipv4-address)
    |  |  +-ro ipv4-address?      inet:ipv4-address
    |  +-(ipv6-address)
    |  |  +-ro ipv6-address?      inet:ipv6-address
    |  +-(trill-nickname)
    |  |  +-ro trill-nickname?   tril-rb-nickname
    +-ro diagnostic-vlan?  boolean
augment /goam:path-discovery/goam:input/goam:flow-entropy:
    +-(flow-entropy-trill)
        +-ro flow-entropy-trill?  flow-entropy-trill
augment /goam:path-discovery/goam:output/goam:response:
    +-ro upstream-rbridge?  tril-rb-nickname
    +-ro next-hop-rbridge*  tril-rb-nickname
rpcs:
    +--x mtv
        +-ro input
            |  +-ro technology          identityref
            |  +-ro MD-name-string      MD-name-string
            |  +-ro MA-name-string?     MA-name-string
            |  +-ro (out-of-band)?
            |  |  +-(ipv4-address)
            |  |  |  +-ro ipv4-address?  inet:ipv4-address
            |  |  +-(ipv6-address)
            |  |  |  +-ro ipv6-address?  inet:ipv6-address
            |  |  +-(trill-nickname)
            |  |  |  +-ro trill-nickname? tril-rb-nickname
```

Kumar, Deepak

Expires May 4, 2016

[Page 7]

```

|   +-+ro diagnostic-vlan?      boolean
|   +-+ro (flow-entropy)?
|   |   +-+:(flow-entropy-null)
|   |   |   +-+ro flow-entropy-null?      empty
|   |   +-+:(flow-entropy-trill)
|   |   |   +-+ro flow-entropy-trill?      flow-entropy-trill
|   +-+ro max-hop-count?      uint8
|   +-+ro type?              identityref
|   +-+ro scope*             tril-rb-nickname
|   +-+ro ecmp-choice?        goam:ecmp-choices
|   +-+ro outgoing-interfaces* [interface]
|   |   +-+ro interface      if:interface-ref
|   +-+ro source-mep
|   |   +-+ro (mp-address)?
|   |   |   +-+:(mac-address)
|   |   |   |   +-+ro mac-address?      yang:mac-address
|   |   |   +-+:(ipv4-address)
|   |   |   |   +-+ro ipv4-address?      inet:ipv4-address
|   |   |   +-+:(ipv6-address)
|   |   |   |   +-+ro ipv6-address?      inet:ipv6-address
|   |   +-+ro mep-id?          tril-rb-nickname
|   +-+ro destination-mep
|   |   +-+ro (mp-address)?
|   |   |   +-+:(mac-address)
|   |   |   |   +-+ro mac-address?      yang:mac-address
|   |   |   +-+:(ipv4-address)
|   |   |   |   +-+ro ipv4-address?      inet:ipv4-address
|   |   |   +-+:(ipv6-address)
|   |   |   |   +-+ro ipv6-address?      inet:ipv6-address
|   |   +-+ro mep-id?          tril-rb-nickname
|   +-+ro output
|   |   +-+ro response* [mep-address mep-id]
|   |   |   +-+ro hop-count?      uint8
|   |   |   +-+ro mep-id          tril-rb-nickname
|   |   |   +-+ro mep-address    tril-rb-nickname
|   |   |   +-+ro next-hop-rbridge* tril-rb-nickname
|   |   |   +-+ro upstream-rbridge? tril-rb-nickname
|   |   |   +-+ro multicast-receiver-count? uint32
|   |   |   +-+ro tx-packet-count?   oam-counter32
|   |   |   +-+ro rx-packet-count?   oam-counter32
|   |   |   +-+ro min-delay?       oam-counter32
|   |   |   +-+ro average-delay?   oam-counter32
|   |   |   +-+ro max-delay?       oam-counter32

```

[6. OAM YANG module](#)

Kumar, Deepak

Expires May 4, 2016

[Page 8]

```
<CODE BEGINS> file "ietf-trill-oam.yang"
module ietf-trill-oam {
    namespace "urn:ietf:params:xml:ns:yang:ietf-trill-oam";
    prefix trilloam;

    import ietf-gen-oam {
        prefix goam;
    }
    import ietf-inet-types {
        prefix inet;
    }
    import ietf-interfaces {
        prefix if;
    }
    organization "IETF TRILL Working Group";
    contact
        "Deepak Kumar dekumar@cisco.com";
    description
        "This YANG module defines the configuration for TRILL,
        OAM Fault Management statistics and rpc";

    revision 2015-11-01 {
        description
            "Initial revision.";
        reference "RFC 7455";
    }

    identity trill {
        base goam:technology-types;
        description
            "trill type";
    }

    typedef tril-rb-nickname {
        type uint16;
        description
            "Trill Rbridge Nickname";
    }

    typedef flow-entropy-trill {
        type binary {
            length "1..96";
        }
        description
            "Flow entropy as defined in RFC7455";
    }

    typedef vlan {
```

Kumar, Deepak

Expires May 4, 2016

[Page 9]

```
type uint16 {
    range "0..4095";
}
description
    "Vlan Identifier.";
}

typedef fgl {
    type uint32;
description
    "Fine Grain Label";
}

identity trill-mtv {
    base goam:command-sub-type;
description
    "identfies this command as multicast tree verification comand";
}

identity trill-ping {
    base goam:command-sub-type;
description
    "identifies the command as TRILL Loopback Request";
}

identity trill-trace-route {
    base goam:command-sub-type;
description
    "identifies the command as TRILL Pathtrace Request.";
}

grouping command-ext-trill {
    description
        "group the rpc command extensions for trill";
    choice out-of-band {
        case ipv4-address {
            leaf ipv4-address {
                type inet:ipv4-address;
                description
                    "ip version 4 address.";
            }
        }
        case ipv6-address {
            leaf ipv6-address {
                type inet:ipv6-address;
                description
                    "ip version 6 address.";
            }
        }
    }
}
```

Kumar, Deepak

Expires May 4, 2016

[Page 10]

```
        }
        case trill-nickname {
            leaf trill-nickname {
                type tril-rb-nickname;
                description
                    "TRILL Rbridge Nickname.";
            }
        }
        description
            "presence of this node indicate out of band request needed";
    }
    leaf diagnostic-vlan {
        type boolean;
        description
            "indicates whether to include diagnostic VLAN/fgl TLV or not
             in the request. actual value is the VLAN/FGL specified
             in the command";
    }
}

augment "/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP/goam:mp-
address" {
    case mep-address-trill {
        leaf mep-address-trill {
            when "/goam:domains/goam:domain/goam:technology='trill'" {
                description
                    "Technology TRILL";
            }
            type tril-rb-nickname;
            description
                "MEP Address TRILL Rbridge Nickname.";
        }
    }
    description
        "Extend Generic OAM Maintenance Point Address.";
}

augment "/goam:domains/goam:domain/goam:MAS/goam:MA/goam:connectivity-
context" {
    case connectivity-context-vlan {
        leaf connectivity-context-vlan {
            type vlan;
            description
                "Connectivity context Vlan Identifier.";
        }
    }
    case connectivity-context-fgl {
        leaf connectivity-context-fgl {
```

```
type fgl;
description
```

Kumar, Deepak

Expires May 4, 2016

[Page 11]

```
        "connectivity context Fine Grain Label.";
    }
}
description
  "Extends connectivity context.";
}

augment "/goam:domains/goam:domain/goam:MAS/goam:MA/goam:flow-
entropy" {
  case flow-entropy-trill {
    leaf flow-entropy-trill {
      type flow-entropy-trill;
      description
        "connectivity context flow entropy.";
    }
  }
  description
  "Extends Flow Entropy.";
}

augment
"/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP/goam:flow-entropy" {
  case flow-entropy-trill {
    leaf flow-entropy-trill {
      type flow-entropy-trill;
      description
        "Flow Entropy TRILL";
    }
  }
  description
  "Extends Flow Entropy defined under Generic OAM MEP.";
}

augment
"/goam:domains/goam:domain/goam:MAS/goam:MA/goam:MEP/goam:session/
goam:flow-entropy" {
  case flow-entropy-trill {
    leaf flow-entropy-trill {
      type flow-entropy-trill;
      description
        "Flow Entropy TRILL";
    }
  }
  description
  "Extends Flow Entropy defined under Generic OAM Session.";
}

augment "/goam:continuity-check/goam:input" {
  uses command-ext-trill;
```

```
description  
"Extends continuity check input.";
```

Kumar, Deepak

Expires May 4, 2016

[Page 12]

```
}

augment "/goam:continuity-check/goam:input/goam:flow-entropy" {
    case flow-entropy-trill {
        leaf flow-entropy-trill {
            type flow-entropy-trill;
            description
                "Flow Entropy TRILL";
        }
    }
    description
        "Extends continuity check input Flow entropy.";
}

augment "/goam:continuity-check/goam:output" {
    description
        "adds trill specific items on the response";
    leaf upstream-rbridge {
        type tril-rb-nickname;
        description
            "Trill Rbridge nickname.";
    }
    leaf-list next-hop-rbridge {
        type tril-rb-nickname;
        description
            "nickname of the next hop RBRdige";
    }
}
augment "/goam:path-discovery/goam:input" {
    uses command-ext-trill;
    description
        "Extends path discovery Input.";
}

augment "/goam:path-discovery/goam:input/goam:flow-entropy" {
    case flow-entropy-trill {
        leaf flow-entropy-trill {
            type flow-entropy-trill;
            description
                "Flow entropy TRILL.";
        }
    }
    description
        "Extends path discovery input flow entropy.";
}

augment "/goam:path-discovery/goam:output/goam:response" {
    description
```

Kumar, Deepak

Expires May 4, 2016

[Page 13]

```
    "adds trill specific items on the response";
leaf upstream-rbridge {
    type tril-rb-nickname;
    description
        "Upstream Rbridge nickname.";
}
leaf-list next-hop-rbridge {
    type tril-rb-nickname;
    description
        "nickname of the next hop RBRdige";
}
}

rpc mtv {
    description
        "Generates Trace-route and return response. Starts with TTL
         of one and increment by one at each hop. Until destination
         reached or TTL reach max valune";
    input {
        uses goam:maintenance-domain-id {
            description
                "Specifies the MA-domain";
        }
        uses goam:ma-identifier {
            description
                "identfies the Maintenance association";
        }
        uses command-ext-trill {
            description
                "defines extensions needed for trill.
                 We are using this structure so mtv command is in line
                 with ping and trace-route";
        }
    }

    choice flow-entropy {
        case flow-entropy-null {
            leaf flow-entropy-null {
                type empty;
                description
                    "Empty flow entropy";
            }
        }
        case flow-entropy-trill {
            leaf flow-entropy-trill {
                type flow-entropy-trill;
                description
                    "Flow Entroy TRILL";
            }
        }
    }
}
```

Kumar, Deepak

Expires May 4, 2016

[Page 14]

```
        }
        description
          "Flow Entropy choices.";
    }

leaf max-hop-count {
  type uint8;
  default "255";
  description
    "Defines maximum value of hop count";
}

leaf type {
  type identityref {
    base goam:command-sub-type;
  }
  description
    "defines different command types";
}

leaf-list scope {
  type tril-rb-nickname;
  description
    "This list contain rbridges that needed to respond
     Empty list indicate all Rbridges needed to respond";
  reference "RFC7455";
}

leaf ecmp-choice {
  type goam:ecmp-choices;
  description
    "0 means use the specified interface
     1 means use round robin";
}

list outgoing-interfaces {
  key "interface";
  leaf interface {
    type if:interface-ref;
    description
      "Interface";
  }
  description
    "List of Outgoing Interface.";
}

container source-mep {
  uses goam:mp-address;
  description
```

Kumar, Deepak

Expires May 4, 2016

[Page 15]

```
    "Source MEP Container.";
```

```
leaf mep-id {
```

```
    type tril-rb-nickname;
```

```
    description
```

```
        "Trill Rbridge Nickname";
```

```
}
```

```
}
```

```
container destination-mep {
```

```
    uses goam:mp-address;
```

```
leaf mep-id {
```

```
    type tril-rb-nickname;
```

```
    description
```

```
        "MEP Identifier.";
```

```
}
```

```
description
```

```
    "Destination MEP Identifier.";
```

```
}
```

```
}
```

```
output {
```

```
    list response {
```

```
        key "mep-address mep-id";
```

```
        leaf hop-count {
```

```
            type uint8;
```

```
            description
```

```
                "unsigned integer 1-255";
```

```
}
```

```
        leaf mep-id {
```

```
            type tril-rb-nickname;
```

```
            description
```

```
                "Maintenance Endpoint Identifier.";
```

```
}
```

```
        leaf mep-address {
```

```
            type tril-rb-nickname;
```

```
            description
```

```
                "Maintenance Endpoint Address.";
```

```
}
```

```
        leaf-list next-hop-rbridge {
```

```
            type tril-rb-nickname;
```

```
            description
```

```
                "list of downstream rbridges. There is no particular
```

```
order";
```

```
}
```

```
        leaf upstream-rbridge {
```

```
            type tril-rb-nickname;
```

```
            description
```

```
                "Upstream Rbridge Nickname.";
```

```
}
```

```
        leaf multicast-receiver-count {
```

Kumar, Deepak

Expires May 4, 2016

[Page 16]

```
    type uint32;
    description
        "number of ports that are interested in this multicast
stream";
    }
    uses goam:monitor-stats;
    description
        "Output list.";
}
}
}
```

<CODE ENDS>

- 7. Base Mode for TRILL OAM** The Base Mode defines default configuration that MUST be present in the devices that comply with this document. Base Mode allows users to have a zero-touch experience. Details of TRILL Base Mode for OAM are defined in [[RFC7455](#)].

8. Security Considerations

There are no security considerations relevant to this document.

9. IANA Considerations

This document registers the following namespace URI in the IETF XML registry. URI:TBD

Kumar, Deepak

Expires May 4, 2016

[Page 17]

10. References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2234] Crocker, D. and Overell, P.(Editors), "Augmented BNF for Syntax Specifications: ABNF", [RFC 2234](#), Internet Mail Consortium and Demon Internet Ltd., November 1997.
- [8021Q] IEEE, "Media Access Control (MAC) Bridges and Virtual Bridged Local Area Networks", IEEE Std 802.1Q-2011, August, 2011.

10.2. Informative References

- [RFC7174] TRILL OAM Framework
- [Y1731] ITU, "OAM functions and mechanisms for Ethernet based networks", ITU-T G.8013/Y.1731, July, 2011.
- [TRLOAMFRM] Salam, S., et.al., "TRILL OAM Framework", [draft-ietf-trill-oam-framework](#), Work in Progress, November, 2012.
- [RFC6291] Andersson, L., et.al., "Guidelines for the use of the "OAM" Acronym in the IETF" [RFC 6291](#), June 2011.
- [RFC6325] Perlman, R., et.al., "Routing Bridges (RBridges): Base Protocol Specification", [RFC 6325](#), July 2011.
- [GENYANGOAM] Senevirathne, T., et.al., "YANG Data Model for Operations, Administration and Maintenance (OAM)", Work in Progress, March, 2014.

11. Acknowledgments

Giles Heron came up with the idea of developing a YANG model as a way of creating a unified OAM API set (interface), work in this document is largely an inspiration of that. Alexander Clemm provided many valuable tips, comments and remarks that helped to refine the YANG model presented in this document.

Kumar, Deepak

Expires May 4, 2016

[Page 18]

Authors' Addresses

Tissa Senevirathne
CISCO Systems
375 East Tasman Drive.
San Jose, CA 95134
USA.

Phone: 408-853-2291
Email: tsenevir@cisco.com

Norman Finn
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035.

Email: nfinn@cisco.com

Deepak Kumar
CISCO Systems
510 McCarthy Blvd
Milpitas, CA 95035.

Email: dekumar@cisco.com

Samer Salam
CISCO Systems
595 Burrard St. Suite 2123
Vancouver, BC V7X 1J1, Canada

Email: ssalam@cisco.com

Liang Xia
Huawei technologies

Email: frank.xialiang@huawei.com

Weiguo Hao
Huawei Technologies
101 Software Avenue
Nanjing 210012, China

Email: haoweiguo@huawei.com

Kumar, Deepak

Expires May 4, 2016

[Page 19]