

SUPA  
Internet Draft  
Intended status: Informational  
Expires: January 2017

W. Liu  
J. Strassner  
G. Karagiannis  
Huawei Technologies  
M. Klyus  
NetCracker  
J. Bi  
Tsinghua University  
C. Xie  
China Telecom  
July 22, 2016

SUPA policy-based management framework  
draft-liu-sup-policy-based-management-framework-02

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 8, 2016.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents

---

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Abstract

Simplified Use of Policy Abstractions (SUPA) defines base YANG data models to encode policy, which will point to device-, technology-, and service-specific YANG models developed in other working groups. Policy rules within an operator's environment can be used to express high-level, possibly network-wide policies to a network management function (within a controller, an orchestrator, or a network element). The network management function can then control the configuration and/or monitoring of network elements and services. This document describes the SUPA basic framework, its elements and interfaces.

## Table of Contents

<a href="#">1.</a>	Introduction .....	<a href="#">2</a>
<a href="#">2.</a>	Framework for Generic Policy-based Management .....	<a href="#">3</a>
<a href="#">2.1.</a>	Overview .....	<a href="#">3</a>
<a href="#">2.2.</a>	Operation .....	<a href="#">8</a>
<a href="#">2.3.</a>	The GPIM and the EPRIM .....	<a href="#">9</a>
<a href="#">2.4.</a>	Creation of Generic YANG Modules .....	<a href="#">9</a>
<a href="#">3.</a>	Security Considerations .....	<a href="#">10</a>
<a href="#">4.</a>	IANA Considerations .....	<a href="#">10</a>
<a href="#">5.</a>	Contributors .....	<a href="#">10</a>
<a href="#">6.</a>	Acknowledgments .....	<a href="#">10</a>
<a href="#">7.</a>	References .....	<a href="#">12</a>
<a href="#">7.1.</a>	Normative References .....	<a href="#">12</a>
<a href="#">7.2.</a>	Informative References .....	<a href="#">12</a>
	Authors' Addresses .....	<a href="#">14</a>

## [1.](#) Introduction

The rapid growth in the variety and importance of traffic flowing over increasingly complex enterprise and service provider network architectures makes the task of network operations and management applications and deploying new services much more difficult. In addition, network operators want to deploy new services quickly and

efficiently. Two possible mechanisms for dealing with this growing difficulty are the use of software abstractions to simplify the design and configuration of monitoring and control operations, and the use of programmatic control over the configuration and operation of such networks. Policy-based management can be used to combine these two mechanisms into an extensible framework.

---

Internet-Draft SUPA policy based management framework July 2016

Policy rules within an operator's environment can be used to express high-level, possibly network-wide policies to a network management function (within a controller, an orchestrator, or a network element). The network management function can then control the configuration and/or monitoring of network elements and services.

Simplified Use of Policy Abstractions (SUPA) will define a generic policy information model (GPIM) [[SUPA-info-model](#)] for use in network operations and management applications. The GPIM defines concepts and terminology needed by policy management independent of the form and content of the policy rule. The ECA Policy Rule Information Model (EPRIM) [[SUPA-info-model](#)] extends the GPIM to define how to build policy rules according to the event-condition-action paradigm.

Both the GPIM and the EPRIM are targeted at controlling the configuration and monitoring of network elements throughout the service development and deployment lifecycle. The GPIM and the EPRIM will both be translated into corresponding YANG [[RFC6020](#)][RFC6020bis] modules that define policy concepts, terminology, and rules in a generic and interoperable manner; additional YANG modules may also be defined from the GPIM and/or EPRIM to manage specific functions.

The key benefit of policy management is that it enables different network elements and services to be instructed to behave the same way, even if they are programmed differently. Management applications will benefit from using policy rules that enable scalable and consistent programmatic control over the configuration and monitoring of network elements and services.

## [2.](#) Framework for Generic Policy-based Management


This section briefly describes the design and operation of the SUPA policy-based management framework.

### [2.1.](#) Overview

Figure 1 shows a simplified functional architecture of how SUPA is used to define policies for creating network element configuration and monitoring snippets. SUPA uses the GPIM to define a consensual vocabulary that different actors can use to interact with network elements and services. The EPRIM defines a generic structure for imperative policies. The GPIM, as well as the combination of the GPIM and EPRIM, are converted to generic YANG data modules.

In one possible approach, SUPA Generic & ECA Policy YANG Data modules together with the Resource and Service YANG data models specified in IETF (which define the specific elements that will be controlled by policies) are used by the Service Interface Logic. This Service Interface Logic creates appropriate input mechanisms for the operator to define policies (e.g., a web form or a script) for creating and managing the network configuration. The operator interacts with the interface, which is then translated to configuration snippets.

Note that YANG models may not exist. In this case, the SUPA generic policy YANG data modules serve as an extensible basis to develop new YANG data models for the Service Interface Logic to create appropriate input mechanisms for the operator to define policies. This transfers the work specified by the Resource and Service YANG data models specified in IETF into the Service Interface Logic, which is then translated to configuration snippets.

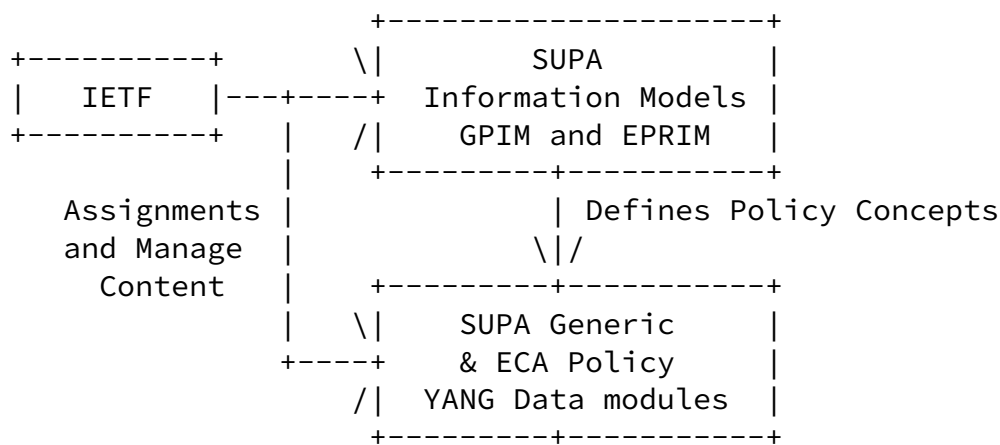

\* Possible Approach

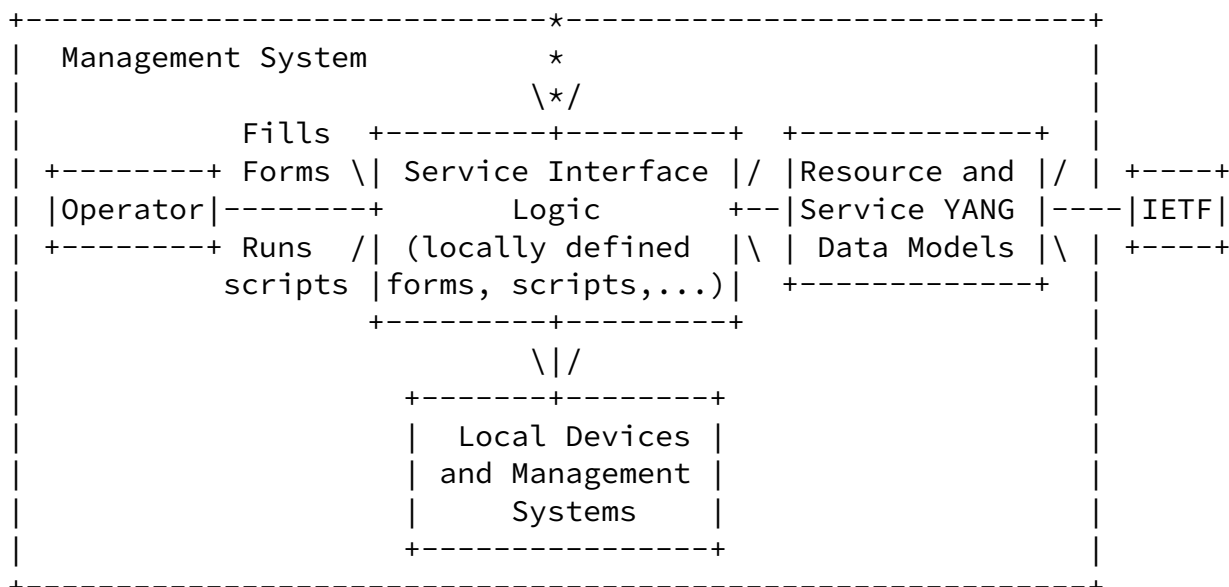


Figure 1 SUPA Framework

Figure 1 is exemplary. The Operator actor shown in Figure 1 can interact with SUPA in other ways not shown in Figure 1. In addition, other actors (e.g., an application developer) that can interact with SUPA are not shown for simplicity.

The EPRIM defines an Event-Condition-Action (ECA) policy as an example of imperative policies. An ECA policy rule is activated when its event clause is true; the condition clause is then evaluated and, if true, signals the execution of one or more actions in the action clause. Imperative policy rules require additional management functions, which are explained in [section 2.2](#) below.


Figure 2 shows a SUPA Policy Model creating and communicating policy rules to two different Network Manager and Network Controller elements.

The Generic Policy Information Model (GPIM) was used to construct policies. The GPIM defines generic policy concepts, as well as two types of policies: ECA policy rules and declarative policy statements.

An ECA policy rule is activated when its event clause is true; the condition clause is then evaluated and, if true, signals the execution of one or more actions in the action clause. This type of policy explicitly defines the current and desired states of the

system being managed.

A set of Generic Policy Data Models are then created from the GPIM. These YANG data model policies are then used to control the configuration of network elements that model the service(s) to be managed using policy.

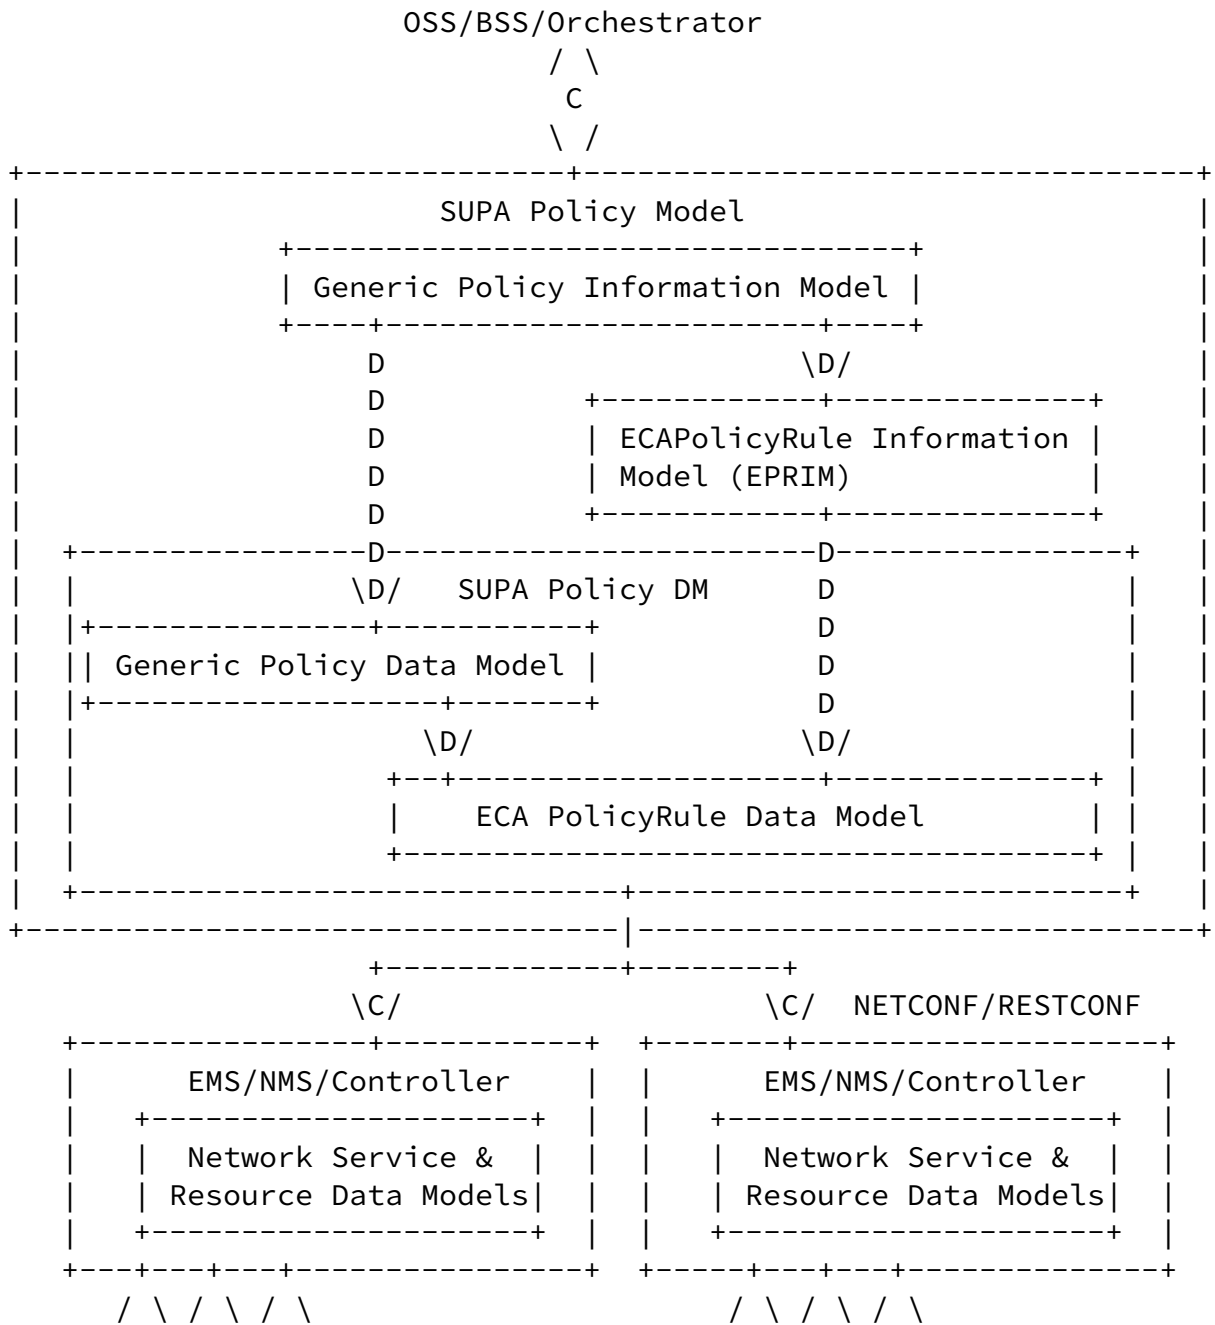

C C C  
\  
NE1 NE2 NE<sub>n</sub>

C C C  
\  
NE1 NE2 NE<sub>n</sub>

Figure 2 SUPA Policy Model Framework

In Figure 2:

A double-headed arrow with Cs means communication;

A double-headed arrow with Ds means derived from.

The network elements used in this framework are:

**SUPA Policy Model:** represents one or more policy modules that contain the following entities:

**Generic Policy Information Model:** a model for defining policy rules that are independent of data repository, data definition, query, and implementation languages, and protocol. This model is abstract and is used for design; it MUST be turned into a data model for implementation.

**Generic Policy Data Model:** a model of policy rules for that are dependent of data repository, data definition, query, and implementation languages, and protocol.

**ECA Policy Rule Information Data Model (EPRIM):** represents a policy rule as a statement that consists of an event clause, a condition clause, and an action clause. This type of Policy Rule explicitly defines the current and desired states of the system being managed. This model is abstract and is used for design; it MUST be turned into a data model for implementation.

**ECA Policy Rule Data Model:** a model of policy rules derived from EPRIM, consist of an event clause, a condition clause, and an action clause.

**EMS/NMS/Controller:** represents one or more entities that are able to control the operation and management of a network infrastructure (e.g., a network topology that consists of Network Elements).

**Network Service & Resource Data Models:** models of the service as well as physical and virtual network topology including the resource attributes (e.g., data rate or latency of links) and operational

parameters needed to support service deployment over the network topology.

Network Element (NE), which can interact with local or remote EMS/NMS/Controller in order to exchange information, such as configuration information, policy enforcement capabilities, and network status.

Relationship among Policy, Service and Resource models can be illustrated by figure below.

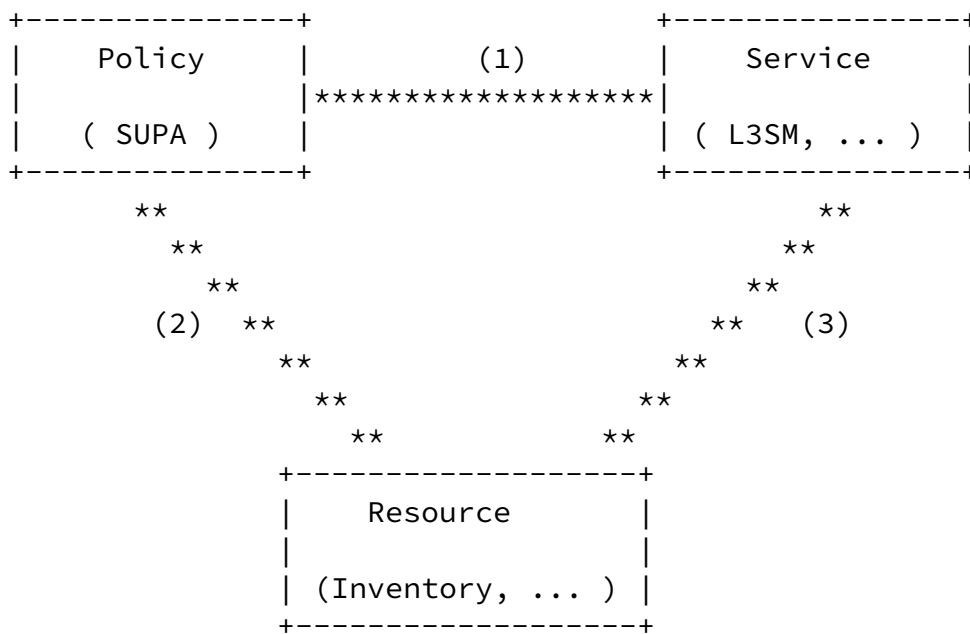


Figure 3 Relationship among Policy, Service and Resource

In Figure 3:

- (1) policy manages and can adjust service behavior as necessary
- (2) policy manages and can adjust resource behavior as necessary
- (3) resource hosts service; changing resources may change service behavior as necessary

Policies are used to manage behavior. Policies can be applied to services and resources. More importantly, policies can be used to manage how resources are allocated and assigned to services. This enables a single policy to manage one or multiple services and resources as well as their dependencies.



## [2.2.](#) Operation

SUPA can be used to define various types of policies, including policies that affect services and/or the configuration of individual or groups of network elements. SUPA can be used by a centralized and/or distributed set of entities for creating, managing, interacting with, and retiring policy rules.

The SUPA scope is limited to policy information and data models. SUPA will not define network resource data models or network service data models; both are out of scope. Instead, SUPA will make use of network resource data models defined by other WGs or SDOs.

Declarative policies that specify the goals to achieve but not how to achieve those goals (also called "intent-based" policies) are out of scope for the initial phase of SUPA.

## [2.3.](#) The GPIM and the EPRIM

The GPIM provides a common vocabulary for representing concepts that are common to expressing different types of policy, but which are independent of language, protocol, repository, and level of abstraction.

This enables different policies at different levels of abstraction to form a continuum, where more abstract policies can be translated into more concrete policies, and vice-versa. For example, the information model can be extended by generalizing concepts from an existing data model into the GPIM; the GPIM extensions can then be used by other data models.

The SUPA working group develops models for expressing policy at different levels of abstraction. Specifically, two models are envisioned (both of which are contained in the Generic Policy Information Model block in Figure 1:

1. a generic model (the GPIM) that defines concepts and vocabulary needed by policy management systems independent of the form and content of the policy

2. a more specific model (the EPRIM) that refines the GPIM to specify policy rules in an event-condition-action form

#### 2.4. Creation of Generic YANG Modules

An information model is abstract. As such, it cannot be directly instantiated (i.e., objects cannot be created directly from it). Therefore, both the GPIM, as well as the combination of the GPIM and the EPRIM, are translated to generic YANG modules.

SUPA will provide guidelines for translating the GPIM (or the combination of the GPIM and the EPRIM) into concrete YANG data models that define how to manage and communicate policies between systems. Multiple imperative policy YANG data models may be instantiated from the GPIM (or the combination of the GPIM and the EPRIM). In particular, SUPA will specify a set of YANG data models that will consist of a base policy model for representing policy management concepts independent of the type or structure of a policy, and as well, an extension for defining policy rules according to the ECA paradigm.

The process of developing the GPIM, EPRIM and the derived/translated YANG data models is realized following the sequence shown below. After completing this process and if the implementation of the YANG

data models requires it, the GPIM and EPRIM and the derived/translated YANG data models are updated and synchronized.

(1)=>(2)=>(3)=>(4)=>(3')=>(2')=>(1')

Where, (1)=GPIM; (2)=EPRIM; (3)=YANG data models; (4)= Implementation; (3')= update of YANG data models; (2')=update of EPRIM; (1') = update of GPIM

The YANG module derived from the GPIM contains concepts and terminology for the common operation and administration of policy-based systems, as well as an extensible structure for policy rules of different paradigms. The YANG module derived from the EPRIM extends the generic nature of the GPIM to represent policies using an event-condition-action structure.

The above sequence allows for the addition of new, as well as editing of existing model elements in the GPIM and EPRIM. In practice, the

implementation sequence may be much simpler. Specifically, it is unlikely that the GPIM will need to be changed. In addition, changes to the EPRIM will likely be focused on fine-tuning the behavior offered by a specific set of model elements.

### [3. Security Considerations](#)

TBD

### [4. IANA Considerations](#)

This document has no actions for IANA.

### [5. Contributors](#)

The following people all contributed to creating this document, listed in alphabetical order:

Ying Chen, China Unicom  
Luis M. Contreras, Telefonica I+D  
Dan Romascanu, Avaya  
J. Schoenwaelder, Jacobs University, Germany  
Qiong Sun, China Telecom

### [6. Acknowledgments](#)

This document has benefited from reviews, suggestions, comments and proposed text provided by the following members, listed in alphabetical order: Andy Bierman, Benoit Claise, Joel Halpern, Bert Wijnen, Tianran Zhou.

Part of the initial draft of this document was picked up from previous documents, and this section lists the acknowledgements from them.

From "SUPA Value Proposition" [[Klyus2016](#)]

The following people all contributed to creating this document, listed in alphabetical order:

Dan Romascanu, Avaya  
J. Schoenwaelder, Jacobs University, Germany  
Qiong Sun, China Telecom  
Parviz Yegani, Juniper Networks

This document has benefited from reviews, suggestions, comments and proposed text provided by the following members, listed in alphabetical order: H. Rafiee, J. Saperia and C. Zhou.

The authors of "SUPA Value Proposition" [[Klyus2016](#)] were:

Maxim Klyus, Ed. , NetCracker  
John Strassner, Ed. , Huawei Technologies  
Will(Shucheng) Liu, Huawei Technologies  
Georgios Karagiannis, Huawei Technologies  
Jun Bi, Tsinghua University

The initial draft of this document merged one document, and this section lists the acknowledgements from it.

From "Problem Statement for Simplified Use of Policy Abstractions (SUPA)" [[Karagiannis2015](#)]

The authors of this draft would like to thank the following persons for the provided valuable feedback and contributions: Diego Lopez, Spencer Dawkins, Jun Bi, Xing Li, Chongfeng Xie, Benoit Claise, Ian Farrer, Marc Blancet, Zhen Cao, Hosnieh Rafiee, Mehmet Ersue, Simon Perreault, Fernando Gont, Jose Saldana, Tom Taylor, Kostas Pentikousis, Juergen Schoenwaelder, John Strassner, Eric Voit, Scott O. Bradner, Marco Liebsch, Scott Cadzow, Marie-Jose Montpetit. Tina Tsou, Will Liu and Jean-Francois Tremblay contributed to an early version of this draft.

The authors of "Problem Statement for Simplified Use of Policy Abstractions (SUPA)" [[Karagiannis2015](#)] were:

Georgios Karagiannis, Huawei Technologies  
Qiong Sun, China Telecom  
Luis M. Contreras, Telefonica  
Parviz Yegani, Juniper  
John Strassner, Huawei Technologies  
Jun Bi, Tsinghua University

From "The Framework of Simplified Use of Policy Abstractions (SUPA)"  
[[Zhou2015](#)]

The authors of this draft would like to thank the following persons for the provided valuable feedback: Diego Lopez, Jose Saldana, Spencer Dawkins, Jun Bi, Xing Li, Chongfeng Xie, Benoit Claise, Ian Farrer, Marc Blancet, Zhen Cao, Hosnieh Rafiee, Mehmet Ersue, Mohamed Boucadair, Jean Francois Tremblay, Tom Taylor, Tina Tsou, Georgios Karagiannis, John Strassner, Raghav Rao, Jing Huang.

Early version of this draft can be found here:

<https://tools.ietf.org/html/draft-zhou-sup-a-architecture-00>

At the early stage of SUPA, we think quite some issues are left open, it is not so suitable to call this draft as "architecture". We would like to rename it to "framework". Later there may be a dedicated architecture document.

The authors of "The Framework of Simplified Use of Policy Abstractions (SUPA)" [[Zhou2015](#)] were:

Cathy Zhou, Huawei Technologies  
Luis M. Contreras, Telefonica  
Qiong Sun, China Telecom  
Parviz Yegani, Juniper

## [7.](#) References

### [7.1.](#) Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

### [7.2.](#) Informative References

[RFC3198] Westerinen, A., Schnizlein, J., Strassner, J., Scherling, M., Quinn, B., Herzog, S., Huynh, A., Carlson, M., Perry, J., Waldbusser, S., "Terminology for Policy-Based Management", [RFC 3198](#), November, 2001

---

Internet-Draft SUPA policy based management framework July 2016

[RFC6020] M. Bjorklund, "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.

[RFC6020bis] M. Bjorklund, "The YANG 1.1 Data Modeling Language", IETF Internet draft, [draft-ietf-netmod-rfc6020bis-14](#), June 2016.

[RFC7285] R. Alimi, R. Penno, Y. Yang, S. Kiesel, S. Previdi, W. Roome, S. Shalunov, R. Woundy "Application-Layer Traffic Optimization (ALTO) Protocol", September 2014

[SUPA-info-model] J. Strassner, J. Halpern, S. van der Meer, "Generic Policy Information Model for Simplified Use of Policy Abstractions (SUPA)", IETF Internet draft, [draft-ietf-supa-generic-policy-info-model-01](#), July 2016

[TR235] J. Strassner, ed., "ZOOM Policy Architecture and Information Model Snapshot", TR245, part of the TM Forum ZOOM project, October 26, 2014

[Karagiannis2015] G. Karagiannis, ed., "Problem Statement for Simplified Use of Policy Abstractions (SUPA)", IETF Internet draft, [draft-karagiannis-sup-a-problem-statement-07](#), June 5, 2015

[Klyus2016] M. Klyus, ed., "SUPA Value Proposition", IETF Internet draft, [draft-klyus-sup-a-value-proposition-00](#), Mar 21, 2016

[Zhou2015] C. Zhou, ed., "The Framework of Simplified Use of Policy Abstractions (SUPA)", [draft-zhou-sup-a-framework-02](#), May 08, 2015

---

Internet-Draft SUPA policy based management framework

July 2016

#### Authors' Addresses

Will(Shucheng) Liu  
Huawei Technologies  
Bantian, Longgang District, Shenzhen 518129  
P.R. China  
Email: liushucheng@huawei.com

John Strassner  
Huawei Technologies  
2330 Central Expressway  
Santa Clara, CA 95138 USA  
Email: strazpdj@gmail.com

Georgios Karagiannis  
Huawei Technologies  
Hansaallee 205, 40549 Dusseldorf  
Germany  
Email: Georgios.Karagiannis@huawei.com

Maxim Klyus  
NetCracker  
Kozhevnikeskaya str.,7 Bldg. #1  
Moscow, Russia  
E-mail: klyus@netcracker.com

Jun Bi  
Tsinghua University  
Network Research Center, Tsinghua University  
Beijing 100084  
P.R. China  
Email: junbi@tsinghua.edu.cn

Chongfeng Xie  
China Telecom Beijing Research Institute  
China Telecom Beijing Information Science&Technology Innovation Park

Beiqijia Town Changping District Beijing 102209 China  
Email: xiechf@ctbri.com.cn

Liu, et al.

Expires January 21, 2017

[Page 14]