

service function chain
Internet-Draft
Intended status: Standards Track
Expires: June 6, 2015

C. Wu
Zhejiang University
W. Meng
C. Wang
ZTE Corporation
December 3, 2014

Redundancy Mechanism for Service Function Chains
draft-meng-sfc-chain-redundancy-01

Abstract

This document discusses about hot standby analysis of service function instances (SFIs) under different scenarios. The document provides requirement and use cases and also describes the suitable scenarios that each solution may be deployed in.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 6, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as

described in the Simplified BSD License.

Table of Contents

[1.](#) Introduction [3](#)

[2.](#) Convention and Terminology [4](#)

[3.](#) Redundancy Mechanisms [5](#)

[3.1.](#) Homogeneous Backup [5](#)

[3.2.](#) Heterogeneous Backup [5](#)

[3.3.](#) Internal Backup [6](#)

[3.4.](#) External Backup [6](#)

[4.](#) Redirect Service Function Paths [8](#)

[5.](#) Control Plane Considerations [9](#)

[6.](#) Data Plane Considerations [10](#)

[7.](#) Load Balancing Considerations [11](#)

[8.](#) Normative References [12](#)

Authors' Addresses [13](#)

[1.](#) Introduction

The object of Service Function Chains (SFC) is trying to unload services from nodes in traditional network and deal with such services through service function chains. As a result of this, redundancy of service function instances needs to be standardize, rather than maintain as an internal mechanism in a traditional network device.

Many SFs might be located in large-scale networks, such as ISP networks or enterprise ones, where exist a large number of customers. In each service function, these customers which is served by a single service function instance (SFI) may experience service degradation in case of the presence of the single point of exceptional failure. Therefore, redundancy of the SFI will be strongly desired in order to deliver highly available services.

This memo describes some use cases of redundancy among SFIs under typical scenarios.

2. Convention and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

The terms about SFC are defined in [[I-D.ietf-sfc-problem-statement](#)] and [[I-D.ietf-sfc-architecture](#)].

3. Redundancy Mechanisms

As illustrated in Figure 1, two SFIs (SFI1 and SFI1') are deployed for redundancy purposes. This is the reference architecture for the mechanisms we describe in this memo.

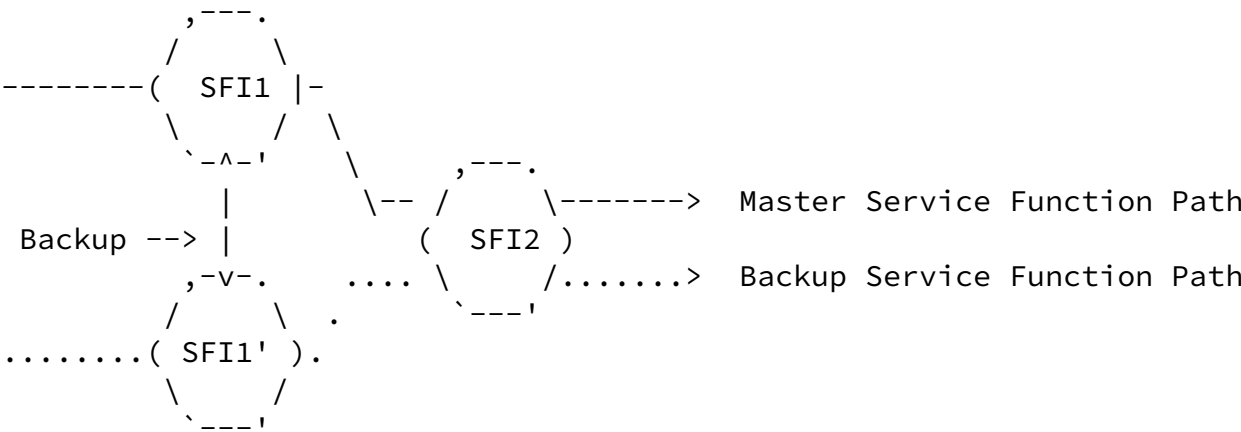


Figure 1: Reference Model

3.1. Homogeneous Backup

Figure 2 illustrates a homogeneous backup cases. In this scenario, each of those master SFIs will have a corresponding backup SFI.

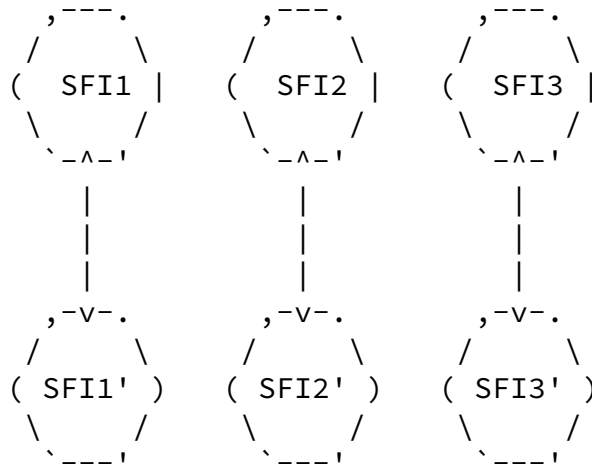


Figure 2: Homogeneous Backup Model

3.2. Heterogeneous Backup

Figure 3 illustrates a heterogeneous backup cases. In this scenario, each of those master SFIs might have more than one corresponding backup SFIs.

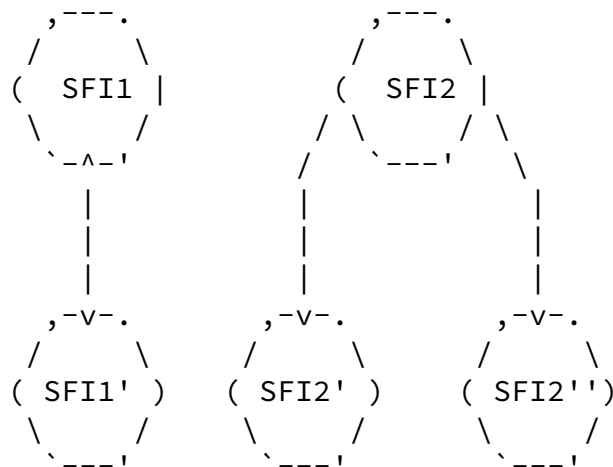


Figure 3: Heterogeneous Backup Model

3.3. Internal Backup

Figure 4 illustrates a internal backup cases. In this scenario, both sides of backup are located in a same Service Function Node.

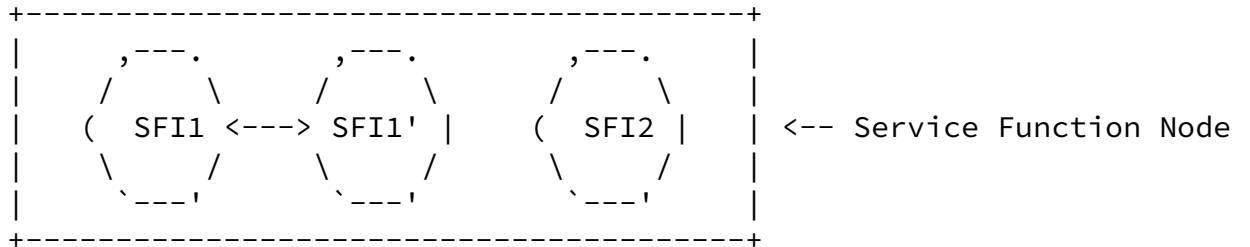
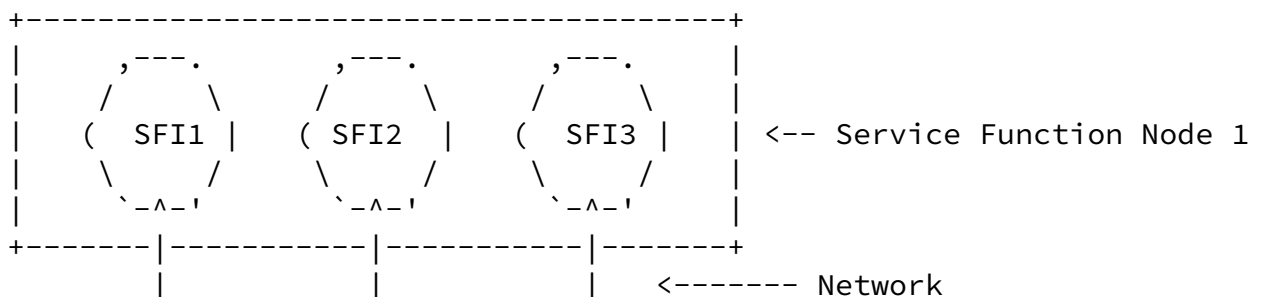


Figure 4: Internal Backup Model

3.4. External Backup

Figure 5 illustrates a external backup cases. In this scenario, each side of backup is located in its own Service Function Node.



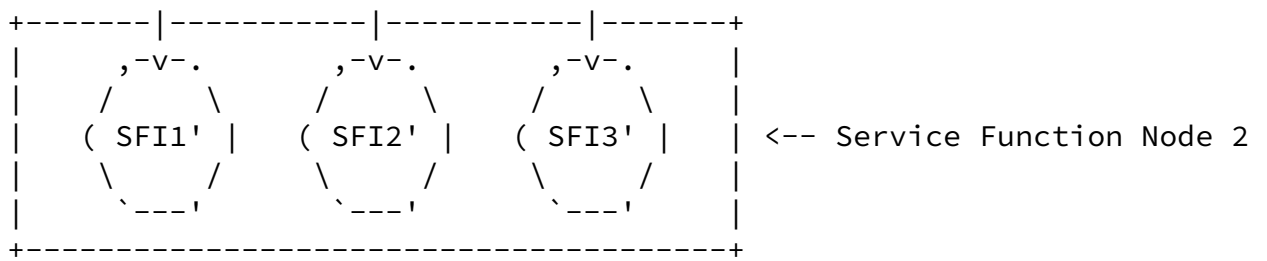


Figure 5: External Backup Model

As described in [ietf-sfc-architecture], a Service Function Path is the instantiation of the defined SFC.

In case of planned maintenance operations or exceptional failure of Service Function Node, The SFP MUST be changed to prevent disrupting the normal traffic.

[5.](#) Control Plane Considerations

TBD

Internet-Draft

service chain Redundancy

December 2014

[6.](#) Data Plane Considerations

TBD

Wu, et al.

Expires June 6, 2015

[Page 10]

Internet-Draft

service chain Redundancy

December 2014

[7.](#) Load Balancing Considerations

TBD

8. Normative References

[I-D.ietf-sfc-architecture]

Halpern, J. and C. Pignataro, "Service Function Chaining (SFC) Architecture", [draft-ietf-sfc-architecture-02](#) (work in progress), September 2014.

[I-D.ietf-sfc-problem-statement]

Quinn, P. and T. Nadeau, "Service Function Chaining Problem Statement", [draft-ietf-sfc-problem-statement-10](#) (work in progress), August 2014.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC2865] Rigney, C., Willens, S., Rubens, A., and W. Simpson, "Remote Authentication Dial In User Service (RADIUS)", [RFC 2865](#), June 2000.

Internet-Draft

service chain Redundancy

December 2014

Authors' Addresses

Wu Chunming
Zhejiang University
No.38 Zheda Road, Xihu District
Hangzhou
China

Email: wuchunming@zju.edu.cn

Wei Meng
ZTE Corporation
No.50 Software Avenue, Yuhuatai District
Nanjing
China

Email: meng.wei2@zte.com.cn, vally.meng@gmail.com

Cui Wang
ZTE Corporation
No.50 Software Avenue, Yuhuatai District
Nanjing
China

Email: wang.cui1@zte.com.cn