

Workgroup: Network Working Group
Internet-Draft: draft-smyslov-ike2-gost-15
Published: 6 December 2022
Intended Status: Informational
Expires: 9 June 2023
Authors: V. Smyslov
 ELVIS-PLUS

Using GOST Cryptographic Algorithms in the Internet Key Exchange Protocol Version 2 (IKEv2)

Abstract

This document defines a set of cryptographic transforms for use in the Internet Key Exchange protocol version 2 (IKEv2). The transforms are based on Russian cryptographic standard algorithms (GOST). Use of GOST ciphers in IKEv2 was defined in RFC 9227. This document aims to define using GOST algorithms for the rest of cryptographic transforms used in IKEv2.

This specification was developed to facilitate implementations that wish to support the GOST algorithms. This document does not imply IETF endorsement of the cryptographic algorithms used in this document.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 9 June 2023.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents
(<https://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Table of Contents

- [1. Introduction](#)
- [2. Terminology and Notation](#)
- [3. Overview](#)
- [4. IKE SA Protection](#)
- [5. Pseudo Random Function](#)
- [6. Shared Key Calculation](#)
 - [6.1. Recipient Tests](#)
- [7. Authentication](#)
 - [7.1. Hash Functions](#)
 - [7.2. ASN.1 Objects](#)
 - [7.2.1. id-tc26-signwithdigest-gost3410-12-256](#)
 - [7.2.2. id-tc26-signwithdigest-gost3410-12-512](#)
- [8. Security Considerations](#)
- [9. IANA Considerations](#)
- [10. References](#)
 - [10.1. Normative References](#)
 - [10.2. Informative References](#)
- [Appendix A. Test Vectors](#)
 - [A.1. Scenario 1](#)
 - [A.2. Scenario 2](#)
- [Author's Address](#)

1. Introduction

The Internet Key Exchange protocol version 2 (IKEv2) defined in [[RFC7296](#)] is an important part of the IP Security (IPsec) architecture. It is used for the authenticated key exchange and for the negotiation of various protocol parameters and features.

This document defines a number of transforms for IKEv2, based on Russian cryptographic standard algorithms (often referred to as "GOST" algorithms) for hash function, digital signature and key exchange method. These definitions are based on the recommendations [[GOST-IKEv2](#)] established by the Standardisation Technical Committee "Cryptographic information protection", which describe how Russian cryptographic standard algorithms are used in IKEv2. Along with the transforms defined in [[RFC9227](#)], the transforms defined in this specification allow using GOST cryptographic algorithms in IPsec protocols.

This specification was developed to facilitate implementations that wish to support the GOST algorithms. This document does not imply

IETF endorsement of the cryptographic algorithms used in this document.

2. Terminology and Notation

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

3. Overview

Russian cryptographic standard (GOST) algorithms are a set of cryptographic algorithms of different types - ciphers, hash functions, digital signatures etc. In particular, Russian cryptographic standard [[GOST3412-2015](#)] defines block ciphers "Kuznyechik" (also defined in [[RFC7801](#)]) and "Magma" (also defined in [[RFC8891](#)]). Cryptographic standard [[GOST3410-2012](#)] defines elliptic curve digital signature algorithm (also defined in [[RFC7091](#)]), while [[GOST3411-2012](#)] defines two cryptographic hash functions "Streebog", with different output length (also defined in [[RFC6986](#)]). The parameters for the elliptic curves used in GOST signature and key exchange algorithms are defined in [[RFC7836](#)].

4. IKE SA Protection

IKE SA protection using GOST algorithms is defined in [[RFC9227](#)]. In particular, two transforms of type 1 (Encryption Algorithm Transform IDs) can be used for IKE SA protection: ENCR_KUZNYECHIK_MGM_KTREE (32) based on "Kuznyechik" block cipher and ENCR_MAGMA_MGM_KTREE (33) based on "Magma" block cipher, both in Multilinear Galois Mode (MGM).

The information here is provided for convenience. For full details, please see [[RFC9227](#)].

5. Pseudo Random Function

This specification defines a new transform of type 2 (Pseudorandom Function Transform IDs) - PRF_HMAC_STREEBOG_512 (9). This transform uses PRF HMAC_GOSTR3411_2012_512 defined in Section 4.1.2 of [[RFC7836](#)]. The PRF uses GOST R 34.11-2012 ("Streebog") hash-function with 512-bit output defined in [[RFC6986](#)][[GOST3411-2012](#)] with HMAC [[RFC2104](#)] construction. The PRF has a 512-bit block size and a 512-bit output length.

6. Shared Key Calculation

This specification defines two new transforms of type 4 (Diffie-Hellman Group Transform IDs): GOST3410_2012_256 (33) and GOST3410_2012_512 (34). These transforms uses Elliptic Curve Diffie-Hellman (ECDH) key exchange algorithm over Twisted Edwards curves. The parameters for these curves are defined in Section A.2 of [[RFC7836](#)]. In particular, transform GOST3410_2012_256 uses id-tc26-gost-3410-2012-256-paramSetA parameter set and GOST3410_2012_512 uses id-tc26-gost-3410-2012-512-paramSetC parameter set (both defined in [[RFC7836](#)]).

Shared secret is computed as follows. The initiator randomly selects its private key d_i from $\{1, \dots, q - 1\}$, where q is the subgroup order and is a parameter of the selected curve. Then a public key Q_i is computed as a point on the curve:

$$Q_i = d_i * G$$

where G is the generator for the selected curve, and then is sent to the responder. The responder makes the same calculations to get d_r and Q_r and sends Q_r to the initiator. After peers exchange Q_i and Q_r both sides can compute a point on the curve:

$$S = ((m / q) * d_i) * Q_r = ((m / q) * d_r) * Q_i$$

where m is the group order and is a parameter of the selected curve. The shared secret K is an x coordinate of S in a little-endian representation. The size of K is determined by the size of used curve and is either 256 or 512 bit.

When GOST public key is transmitted in the KE payload, it **MUST** be represented as x coordinate immediately followed by y coordinate, each in a little-endian representation. The size of each coordinate is determined by the size of the used curve and is either 256 or 512 bits, so that the size of the Key Exchange Data field in the KE payload is either 64 or 128 octets.

6.1. Recipient Tests

Upon receiving peer's public key, implementations **MUST** check that the key is actually a point on the curve. Otherwise the exchange fails. Implementations **MUST** check that the calculated public value S is not an identity element of the curve. If S appears to be the identity element of the curve, the exchange fails. The INVALID_SYNTAX notification **MAY** be sent in these cases.

7. Authentication

IKEv2 allows various authentication methods to be used for IKE SA establishment. Some methods are tied to a particular algorithm, while others may be used with different algorithms. This specification makes no restrictions on using the latter ones with the GOST algorithms. In particular, "Shared Key Message Integrity Code" (2), defined in [[RFC7296](#)], and "NULL Authentication" (13), defined in [[RFC7619](#)], can be used with GOST algorithms with no changes to the process of the AUTH payload content calculation.

When GOST digital signature is used in IKEv2 for authentication purposes, an Authentication Method "Digital Signature" (14), defined in [[RFC7427](#)], **MUST** be specified in the AUTH payload.

GOST digital signature algorithm GOST R 34.10-2012 is defined in [[RFC7091](#)][[GOST3410-2012](#)]. There are two variants of GOST signature algorithm - one over 256-bit elliptic curve and the other over 512-bit key elliptic curve. The signature value, as defined in [[RFC7091](#)] [[GOST3410-2012](#)], consists of two integers r and s. The size of each integer is either 256 bit or 512 bit depending on the used elliptic curve. The content of the Signature Value field in the AUTH payload **MUST** consist of s immediately followed by r, each in a big-endian representation, so that the size of the field is either 64 or 128 octets. The AlgorithmIdentifier ASN.1 objects for GOST digital signature algorithm are defined in [Section 7.2](#).

7.1. Hash Functions

GOST digital signature algorithm uses GOST hash functions GOST R 34.11-2012 ("Streebog") defined in [[RFC6986](#)][[GOST3411-2012](#)]. There are two "Streebog" hash functions - one with 256-bit output length and the other with 512-bit output length. The former is used with GOST digital signature algorithm over a 256-bit elliptic curve and the latter - over a 512-bit key elliptic curve.

This specification defines two new values for IKEv2 Hash Algorithms registry: STREEBOG_256 (6) for GOST hash function with 256-bit output length and STREEBOG_512 (7) for the 512-bit length output. These values **MUST** be included in the SIGNATURE_HASH_ALGORITHMS notify if a corresponding GOST digital signature algorithm is supported by the sender and its local policy allows using this algorithm (see Section 4 of [[RFC7427](#)] for details).

7.2. ASN.1 Objects

This section lists GOST signature algorithm ASN.1 AlgorithmIdentifier objects in binary form. With GOST signature algorithms, optional parameters in AlgorithmIdentifier objects are

always omitted. These objects are defined in [[RFC9215](#)] [[USING-GOST-IN-CERTS](#)] and are provided here for convenience.

7.2.1. **id-tc26-signwithdigest-gost3410-12-256**

```
id-tc26-signwithdigest-gost3410-12-256 OBJECT IDENTIFIER ::= {  
    iso(1) member-body(2) ru(643) rosstandart(7) tc26(1) algorithms(1)  
    signwithdigest(3) gost3410-12-256(2) }
```

The optional parameters field must be omitted.

Name = id-tc26-signwithdigest-gost3410-12-256
OID = 1.2.643.7.1.1.3.2
Length = 12
0000: 300a 0608 2a85 0307 0101 0302

7.2.2. **id-tc26-signwithdigest-gost3410-12-512**

```
id-tc26-signwithdigest-gost3410-12-512 OBJECT IDENTIFIER ::= {  
    iso(1) member-body(2) ru(643) rosstandart(7) tc26(1) algorithms(1)  
    signwithdigest(3) gost3410-12-512(3) }
```

The optional parameters field must be omitted.

Name = id-tc26-signwithdigest-gost3410-12-512
OID = 1.2.643.7.1.1.3.3
Length = 12
0000: 300a 0608 2a85 0307 0101 0303

8. Security Considerations

The security considerations of [[RFC7296](#)] and [[RFC7427](#)] apply accordingly.

The security of GOST elliptic curves is discussed in [[GOST-EC-SECURITY](#)]. The security of "Streebog" hash function is discussed in [[STREEBOG-SECURITY](#)]. A second preimage attack on "Streebog" is described in [[STREEBOG-PREIMAGE](#)] if message size exceeds 2^{259} blocks. This attack is not relevant to how "Streebog" is used in IKEv2.

9. IANA Considerations

IANA has assigned one Transform ID in the "Transform Type 2 - Pseudorandom Function Transform IDs" registry (where RFCXXXX is this document):

Number	Name	Reference
9	PRF_HMAC_STREEBOG_512	[RFCXXXX]

IANA has assigned two Transform IDs in the "Transform Type 4 - Diffie-Hellman Group Transform IDs" registry (where RFCXXXX is this document):

Number	Name	Recipient Tests	Reference

33	GOST3410_2012_256	[RFCXXXX] Sec. 6.1	[RFCXXXX]
34	GOST3410_2012_512	[RFCXXXX] Sec. 6.1	[RFCXXXX]

IANA has assigned two values in the "IKEv2 Hash Algorithms" registry (where RFCXXXX is this document):

Number	Hash Algorithm	Reference

6	STREEBOG_256	[RFCXXXX]
7	STREEBOG_512	[RFCXXXX]

10. References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC6986] Dolmatov, V., Ed. and A. Degtyarev, "GOST R 34.11-2012: Hash Function", RFC 6986, DOI 10.17487/RFC6986, August 2013, <<https://www.rfc-editor.org/info/rfc6986>>.
- [RFC7091] Dolmatov, V., Ed. and A. Degtyarev, "GOST R 34.10-2012: Digital Signature Algorithm", RFC 7091, DOI 10.17487/RFC7091, December 2013, <<https://www.rfc-editor.org/info/rfc7091>>.
- [RFC7296] Kaufman, C., Hoffman, P., Nir, Y., Eronen, P., and T. Kivinen, "Internet Key Exchange Protocol Version 2 (IKEv2)", STD 79, RFC 7296, DOI 10.17487/RFC7296, October 2014, <<https://www.rfc-editor.org/info/rfc7296>>.
- [RFC7427] Kivinen, T. and J. Snyder, "Signature Authentication in the Internet Key Exchange Version 2 (IKEv2)", RFC 7427,

DOI 10.17487/RFC7427, January 2015, <<https://www.rfc-editor.org/info/rfc7427>>.

- [RFC7836] Smyshlyayev, S., Ed., Alekseev, E., Oshkin, I., Popov, V., Leontiev, S., Podobaev, V., and D. Belyavsky, "Guidelines on the Cryptographic Algorithms to Accompany the Usage of Standards GOST R 34.10-2012 and GOST R 34.11-2012", RFC 7836, DOI 10.17487/RFC7836, March 2016, <<https://www.rfc-editor.org/info/rfc7836>>.
- [RFC9215] Baryshkov, D., Ed., Nikolaev, V., and A. Chelpanov, "Using GOST R 34.10-2012 and GOST R 34.11-2012 Algorithms with the Internet X.509 Public Key Infrastructure", RFC 9215, DOI 10.17487/RFC9215, March 2022, <<https://www.rfc-editor.org/info/rfc9215>>.
- [RFC9227] Smyslov, V., "Using GOST Ciphers in the Encapsulating Security Payload (ESP) and Internet Key Exchange Version 2 (IKEv2) Protocols", RFC 9227, DOI 10.17487/RFC9227, March 2022, <<https://www.rfc-editor.org/info/rfc9227>>.

10.2. Informative References

- [RFC2104] Krawczyk, H., Bellare, M., and R. Canetti, "HMAC: Keyed-Hashing for Message Authentication", RFC 2104, DOI 10.17487/RFC2104, February 1997, <<https://www.rfc-editor.org/info/rfc2104>>.
- [RFC7619] Smyslov, V. and P. Wouters, "The NULL Authentication Method in the Internet Key Exchange Protocol Version 2 (IKEv2)", RFC 7619, DOI 10.17487/RFC7619, August 2015, <<https://www.rfc-editor.org/info/rfc7619>>.
- [RFC7801] Dolmatov, V., Ed., "GOST R 34.12-2015: Block Cipher "Kuznyechik"", RFC 7801, DOI 10.17487/RFC7801, March 2016, <<https://www.rfc-editor.org/info/rfc7801>>.
- [RFC8891] Dolmatov, V., Ed. and D. Baryshkov, "GOST R 34.12-2015: Block Cipher "Magma""", RFC 8891, DOI 10.17487/RFC8891, September 2020, <<https://www.rfc-editor.org/info/rfc8891>>.
- [GOST3410-2012] Federal Agency on Technical Regulating and Metrology, "Information technology. Cryptographic data security. Signature and verification processes of [electronic] digital signature", GOST R 34.10-2012, 2012. (In Russian)
- [GOST3411-2012] Federal Agency on Technical Regulating and Metrology, "Information technology. Cryptographic data

security. Hashing function", GOST R 34.11-2012, 2012. (In Russian)

[GOST3412-2015] Federal Agency on Technical Regulating and Metrology, "Information technology. Cryptographic data security. Block ciphers", GOST R 34.12-2015, 2015. (In Russian)

[GOST-IKEv2] Standardisation Technical Committee "Cryptographic information protection", "Information technology. Cryptographic information protection. The use of Russian cryptographic algorithms in the IKEv2 key exchange protocol", MR 26.2.001-22, 2022. (In Russian)

[GOST-IKEv2-TESTVECTORS] Standardisation Technical Committee "Cryptographic information protection", "Information technology. Cryptographic information protection. The test vectors for the use of Russian cryptographic algorithms in the IKEv2 key exchange protocol", MR 26.2.002-22, 2022. (In Russian)

[USING-GOST-IN-CERTS] Federal Agency on Technical Regulating and Metrology, "Information technology. Cryptographic data security. Using GOST R 34.10-2012 and GOST R 34.11-2012 algorithms in X.509 Certificates, CRLs and PKCS #10 Certificate Requests", R 1323565.1.023-2018, 2018. (In Russian)

[GOST-EC-SECURITY] Alekseev, E., Nikolaev, V., and S. Smyshlyayev, "On the security properties of Russian standardized elliptic curves", <https://doi.org/10.4213/mvk260>, 2018.

[STREEBOG-SECURITY] Wang, Z., Yu, H., and X. Wang, "Cryptanalysis of GOST R hash function", <https://doi.org/10.1016/j.ipl.2014.07.007>, 2014.

[STREEBOG-PREIMAGE] Guo, J., Jean, J., Leurent, G., Peyrin, T., and L. Wang, "The Usage of Counter Revisited: Second-Preimage Attack on New Russian Standardized Hash Function", <https://eprint.iacr.org/2014/675>, 2014.

Appendix A. Test Vectors

This Appendix contains test vectors for two scenarios. The test vectors were borrowed from [\[GOST-IKEv2-TESTVECTORS\]](#). In both scenarios peers establish, rekey and delete IKE SA and ESP SAs. The IP addresses of the peers used in both scenarios are the same:

*initiator's IP address is 10.111.10.171

*responder's IP address is 10.111.10.45

The test vectors also cover IKE message protection for transforms defined in [[RFC9227](#)]. The keys SK_ei, SK_er are transform keys (see Section 4.4 of [[RFC9227](#)]) and the keys K1i, K2i, K3i, K1r, K2r, and K3r represent nodes in the key tree for the initiator and responder correspondently. The leaf keys K3i and K3r are effectively message protection keys (K_msg in terms of [[RFC9227](#)]). MGM nonces (also known as Initial Counter Nonces) are defined in Section 4.3 of [[RFC9227](#)]. IV format is defined in Section 4.2 of [[RFC9227](#)] and AAD format is defined in Section 4.7 of [[RFC9227](#)].

All other keys and entities used in the test vectors are defined in [[RFC7296](#)].

A.1. Scenario 1

With this scenario peers establish, rekey and delete IKE SA and ESP SAs using the following prerequisites:

*Peers authenticate each other using preshared key

*Initiator's ID is "IKE-Initiator" of type ID_FQDN

*Responder's ID is "IKE-Responder" of type ID_FQDN

*No NAT is present between the peers

*IKE fragmentation is not used

*IKE SA is created with the following transforms:

-ENCR_KUZNYECHIK_MGM_KTREE

-PRF_HMAC_STREEBOG_512

-GOST3410_2012_512

*ESP SAs are created with the following transforms:

-ENCR_KUZNYECHIK_MGM_KTREE


-ESN off

The 256-bit preshared key (PSK) used for authentication:

```
00000000: e2 69 24 cf 15 32 93 47 3a 11 a4 97 a8 a4 5c b3  
00000010: 4e 28 31 ef 0e 28 bb 77 69 69 c6 3c 68 bf e1 0d
```

This scenario includes four sub-scenarios.

Sub-scenario 1: Establishing of IKE and ESP SAs using the
IKE_SA_INIT and the IKE_AUTH exchanges.

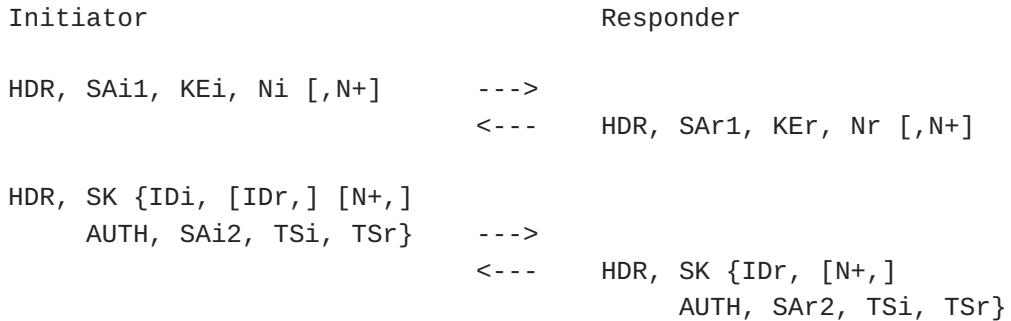

Initiator's actions:

(1) Generates random SPIi for IKE SA

```
00000000: e9 d3 f3 78 19 1c 38 40
```

(2) Generates random IKE nonce Ni

```
00000000: 48 b6 d3 b3 ab 56 f2 c8 f0 42 d5 16 e7 21 d9 31
00000010: f9 ac 10 f9 7f 80 8c 51 2b d6 f4 59 93 a7 4d 13
```

(3) Generates ephemeral private key

```
00000000: 95 07 3a 04 dc db ce 77 f5 5e 4f fe 97 0c cd 6f
00000010: 0a e0 b5 c6 53 bd a0 da 47 fc 03 b5 8a e1 d5 1d
00000020: 89 e6 c0 db dc b1 ea 74 59 1f 1d 0c 9f 3f 4f dc
00000030: 10 d5 c9 cc a4 34 9c 3d 3e 6b dd 57 c5 d6 c9 01
```

(4)

Computes public key

```
00000000: 96 1b 9b 21 4f 7e e9 83 ec 27 a0 64 0c 77 4f be
00000010: 78 31 be fd 1e 63 7d 6e 76 eb 2f 81 23 80 62 87
00000020: ba 2c f7 31 a2 70 b7 3e 8a 1d 91 93 72 cf 61 c8
00000030: d3 18 f6 bc f7 a0 44 c8 11 a7 fe d2 99 ea 8b 4d
00000040: 59 fa a7 38 ae 03 48 d2 aa f7 ff 11 e0 60 29 dd
00000050: 16 59 58 78 8e 3b e2 b5 48 36 3c ca 07 1a 5d be
00000060: a7 42 79 81 74 22 6f 53 15 d2 c2 f6 06 d4 0f ed
00000070: 70 f0 1c cf 89 2e ac 3c fe 01 02 91 85 06 7b d4
```

(5)

Creates message

```
IKE SA Init
E9D3F378191C3840.0000000000000000.00000000 IKEv2 R<-I[316]
SA[52]{
    P[48](#1:IKE::5#){
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
        ENCR_MAGMA_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_512,
        GOST3410_2012_256}],
    KE[136](GOST3410_2012_512){961B9B...067BD4},
    NONCE[36]{48B6D3...A74D13},
    N[28](NAT_DETECTION_SOURCE_IP){92B291...F4E2BF},
    N[28](NAT_DETECTION_DESTINATION_IP){77E199...98A613},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED)
```

(6)

Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [316]

```
00000000: e9 d3 f3 78 19 1c 38 40 00 00 00 00 00 00 00 00  
00000010: 21 20 22 08 00 00 00 00 00 00 01 3c 22 00 00 34  
00000020: 00 00 00 30 01 01 00 05 03 00 00 08 01 00 00 20  
00000030: 03 00 00 08 01 00 00 21 03 00 00 08 02 00 00 09  
00000040: 03 00 00 08 04 00 00 22 00 00 00 08 04 00 00 21  
00000050: 28 00 00 88 00 22 00 00 96 1b 9b 21 4f 7e e9 83  
00000060: ec 27 a0 64 0c 77 4f be 78 31 be fd 1e 63 7d 6e  
00000070: 76 eb 2f 81 23 80 62 87 ba 2c f7 31 a2 70 b7 3e  
00000080: 8a 1d 91 93 72 cf 61 c8 d3 18 f6 bc f7 a0 44 c8  
00000090: 11 a7 fe d2 99 ea 8b 4d 59 fa a7 38 ae 03 48 d2  
000000A0: aa f7 ff 11 e0 60 29 dd 16 59 58 78 8e 3b e2 b5  
000000B0: 48 36 3c ca 07 1a 5d be a7 42 79 81 74 22 6f 53  
000000C0: 15 d2 c2 f6 06 d4 0f ed 70 f0 1c cf 89 2e ac 3c  
000000D0: fe 01 02 91 85 06 7b d4 29 00 00 24 48 b6 d3 b3  
000000E0: ab 56 f2 c8 f0 42 d5 16 e7 21 d9 31 f9 ac 10 f9  
000000F0: 7f 80 8c 51 2b d6 f4 59 93 a7 4d 13 29 00 00 1c  
00000100: 00 00 40 04 92 b2 91 d3 9b 53 51 c8 33 c2 1f 2e  
00000110: 92 ef 24 88 ef f4 e2 bf 29 00 00 1c 00 00 40 05  
00000120: 77 e1 99 fe 3b 7e 33 42 b5 af ad 51 cf 97 91 4b  
00000130: 08 98 a6 13 00 00 00 08 00 00 40 2e
```

Responder's actions:

(7) Parses received message

```
IKE SA Init  
E9D3F378191C3840.0000000000000000.00000000 IKEv2 I->R[316]  
SA[52]{  
    P[48](#1:IKE::5#){  
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
        ENCR_MAGMA_MGM_KTREE,  
        PRF=PRF_HMAC_STREEBOG_512,  
        KE=GOST3410_2012_512,  
        GOST3410_2012_256}},{  
    KE[136](GOST3410_2012_512){961B9B...067BD4},  
    NONCE[36]{48B6D3...A74D13},  
    N[28](NAT_DETECTION_SOURCE_IP){92B291...F4E2BF},  
    N[28](NAT_DETECTION_DESTINATION_IP){77E199...98A613},  
    N[8](IKEV2_FRAGMENTATION_SUPPORTED)
```

(8)

Generates random SPIr for IKE SA

00000000: 8d df f4 01 fb fb 0b 14

(9)

Generates random IKE nonce Nr

00000000: fb 81 c8 80 e5 f0 35 60 99 ef 46 b2 72 44 95 0f

00000010: 03 85 f4 73 92 67 b7 68 43 8f 90 69 16 fe 63 f0

(10)

Generates ephemeral private key

00000000: 7f 49 e3 77 39 db 03 cc fe fe c9 63 17 71 e9 f1

00000010: 50 4b 98 79 b3 df 3b 48 bd f3 89 72 52 07 47 4f

00000020: 70 29 f8 39 63 2c 89 b6 92 39 18 27 9c fb 80 f5

00000030: 43 af 8b 9c 68 bb 93 22 1e 18 7d c2 1b dc e1 22

(11)

Computes public key

00000000: ad b4 e4 db b9 af 28 59 ab 76 4d 30 fd d4 7a f3

00000010: 5f 8c cb 85 8c cc ca 30 5e 4a 9d 20 52 32 48 88

00000020: 69 81 48 5e ae db 1e 8c 0d 8d db 12 3e f5 ef 1d

00000030: 7f e8 83 39 7f e6 5d 6e 51 ca 9e ee f5 b6 ba 02

00000040: db 10 87 47 ba 38 b3 17 95 60 6d a3 81 15 5c 3d

00000050: 6b 86 d3 59 2f 5f 74 14 17 a9 64 20 3d 05 12 08

00000060: 02 75 15 ac ff 08 7c aa 82 1d f6 89 6c f4 33 e0

00000070: 01 4e 11 68 73 7e e3 e9 c6 88 ce 90 9b 39 05 48

(12)

Creates message

```

IKE SA Init
E9D3F378191C3840.8DDFF401FBFB0B14.00000000 IKEv2 I<=R[300]
SA[36]{
    P[32](#1:IKE::3#){
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_512} },
    KE[136](GOST3410_2012_512){ADB4E4...390548},
    NONCE[36]{FB81C8...FE63F0},
    N[28](NAT_DETECTION_SOURCE_IP){6D7A48...683D59},
    N[28](NAT_DETECTION_DESTINATION_IP){481A5B...905499},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED)

```

(13) Sends message, peer receives message

10.111.10.171:54294<-10.111.15.45:500 [300]

```

00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 21 20 22 20 00 00 00 00 00 00 01 2c 22 00 00 24
00000020: 00 00 00 20 01 01 00 03 03 00 00 08 01 00 00 20
00000030: 03 00 00 08 02 00 00 09 00 00 00 08 04 00 00 22
00000040: 28 00 00 88 00 22 00 00 ad b4 e4 db b9 af 28 59
00000050: ab 76 4d 30 fd d4 7a f3 5f 8c cb 85 8c cc ca 30
00000060: 5e 4a 9d 20 52 32 48 88 69 81 48 5e ae db 1e 8c
00000070: 0d 8d db 12 3e f5 ef 1d 7f e8 83 39 7f e6 5d 6e
00000080: 51 ca 9e ee f5 b6 ba 02 db 10 87 47 ba 38 b3 17
00000090: 95 60 6d a3 81 15 5c 3d 6b 86 d3 59 2f 5f 74 14
000000A0: 17 a9 64 20 3d 05 12 08 02 75 15 ac ff 08 7c aa
000000B0: 82 1d f6 89 6c f4 33 e0 01 4e 11 68 73 7e e3 e9
000000C0: c6 88 ce 90 9b 39 05 48 29 00 00 24 fb 81 c8 80
000000D0: e5 f0 35 60 99 ef 46 b2 72 44 95 0f 03 85 f4 73
000000E0: 92 67 b7 68 43 8f 90 69 16 fe 63 f0 29 00 00 1c
000000F0: 00 00 40 04 6d 7a 48 7a 9d ce 80 6f b0 09 4b f7
00000100: 8d fd ec eb 2e 68 3d 59 29 00 00 1c 00 00 40 05
00000110: 48 1a 5b 15 12 e4 26 a3 8d 88 8b 65 8e 17 b3 f1
00000120: 38 90 54 99 00 00 00 08 00 00 40 2e

```

Initiator's actions:

(14) Parses received message

```
IKE SA Init
E9D3F378191C3840.8DDFF401FBFB0B14.00000000 IKEv2 R=>I[300]
SA[36]{
    P[32](#1:IKE::3#){
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_512} },
    KE[136](GOST3410_2012_512){ADB4E4...390548},
    NONCE[36]{FB81C8...FE63F0},
    N[28](NAT_DETECTION_SOURCE_IP){6D7A48...683D59},
    N[28](NAT_DETECTION_DESTINATION_IP){481A5B...905499},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED)
```

(15) Computes shared key

```
00000000: a2 43 6c bd 2d c1 0f 81 0d f7 6f 24 ae 78 70 f2
00000010: 27 5d 1b dc c5 52 0e d8 53 e5 c5 43 98 f7 35 ce
00000020: 32 70 89 2b 8e 89 0b 7d b3 98 77 cd bd 31 5d 18
00000030: 10 5d 8b ac 16 f0 aa fd bc dc 7c 69 75 14 48 a8
```

(16) Computes SKEYSEED

```
00000000: fc 7b d9 80 4b 15 00 60 d2 08 17 3a 08 4b a9 2a
00000010: 0f 01 cb c3 ef e9 b5 aa 15 5b 0e 80 24 68 3c 4c
00000020: 6c fb e9 c8 16 7d 54 2d 48 ee 61 71 01 68 ca 68
00000030: 4f 7c b0 1b 61 29 20 9a 68 88 5b 3f d7 19 0b d0
```

(17) Computes SK_d

```
00000000: 6b 2b 83 d7 a9 10 5f f4 27 e8 05 86 b7 f0 09 31
00000010: 16 43 81 ae 88 7a 3f c9 65 30 73 00 e5 82 81 52
00000020: 68 07 ba e5 39 ef 6e a7 75 db 2c c9 1c d3 4b 70
00000030: e0 be 97 14 81 bb 0c 80 ef b3 6e 12 2a 08 74 36
```

(18)

Computes SK_ei

```
00000000: 8c 6d f1 8f 6a ff 9f 1b 3e be 40 ef e2 64 c2 bf  
00000010: 8e 6e d7 4c b5 8b 0a 74 a7 30 0c 21 7e 66 c7 d4  
00000020: 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(19) Computes SK_er

```
00000000: df e8 7d 5f 9c da 5e 45 b8 b9 11 02 63 6c 08 47  
00000010: f6 4f c5 5d 6a 7b 4b 91 52 32 0a a2 5e c0 31 34  
00000020: 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(20) Computes SK_pi

```
00000000: 93 11 c6 4c d7 12 b5 40 f9 e8 7e 73 c5 28 a7 d8  
00000010: 89 48 1c f1 bf a3 ad 67 cf b4 d9 6a 9b fe 3c ea  
00000020: 2f cc 2a 5e d4 e4 0b 27 7f be c9 9d c3 8d b7 68  
00000030: 03 c1 f3 f8 94 af 47 8b d8 35 b8 6b c2 ca 38 16
```

(21) Computes SK_pr

```
00000000: 7b b0 4b 24 74 9c 73 68 7f 34 a3 b8 17 6b 9e 30  
00000010: f2 eb 33 73 23 ff 49 1e e3 07 e7 9f 77 b6 2a ef  
00000020: 5a 5e a9 02 8e 90 5c 83 49 ec 1e aa a4 05 bc e1  
00000030: fb c4 5b f0 27 d6 9b 41 77 6f e1 48 f3 37 99 e5
```

(22) Computes prf(SK_pi, IDi)

```
00000000: 06 d3 d4 36 ab 5b 4f 41 d4 3d fc 79 1f 13 a3 89  
00000010: e9 a6 6e d7 87 7d 72 d1 9d 71 78 2d 05 ee 47 fb  
00000020: 82 c8 8f 86 cd b5 05 1d 25 7c 1e 79 18 ef 4e 4e  
00000030: 8d ca f4 47 12 c6 7f 6a 32 7d d8 e8 f2 8e f8 33
```

(23) Uses PSK

```
000000000: e2 69 24 cf 15 32 93 47 3a 11 a4 97 a8 a4 5c b3  
000000010: 4e 28 31 ef 0e 28 bb 77 69 69 c6 3c 68 bf e1 0d
```

(24) Computes prf(PSK, "Key Pad for IKEv2")

```
000000000: 01 3c a5 24 59 4e bc 78 99 20 61 6c 3f 03 e5 2e  
000000010: 7a 75 2a 0b 78 36 bd 0a 89 ce 1d e7 8b 23 32 ae  
000000020: 08 9a a0 03 1d da f6 14 8c 38 c6 bd 7c 03 13 24  
000000030: bd af c8 ad 88 18 8f 41 d0 12 b9 e1 5a 66 8f 10
```

(25) Computes content of AUTH payload

```
000000000: c9 9b 01 9a 89 ee 56 53 ab 28 25 a1 d7 51 54 ac  
000000010: 01 42 fb d6 2e bc 1e f3 65 73 63 5b 16 81 4b 97  
000000020: 38 b4 20 5d 09 d9 b4 21 b4 0c f4 55 27 80 e7 4c  
000000030: cf 66 d0 14 25 87 7c 20 84 68 d5 79 3a 74 1e e3
```

(26) Computes K1i ($i_1 = 0$)

```
000000000: f2 ac 10 7a 1f 92 d1 b1 1b b1 74 c3 42 76 a3 3f  
000000010: fa ea 1b 1e 81 10 c1 01 7a 25 9a 00 8d 76 57 de
```

(27) Computes K2i ($i_2 = 0$)

```
000000000: 77 e0 16 18 ad 76 e8 5a 66 2f 88 c4 c0 92 ec 33  
000000010: 6d 23 63 28 28 d5 77 d8 84 e1 01 b1 8d 84 a7 1d
```

(28)

Computes K3i (i3 = 0)

```
00000000: 36 ff fa db 84 a9 f1 21 d5 84 16 db eb af 21 a2  
000000010: 12 6d 5c 35 95 fe 89 cf 27 47 52 8a b7 36 92 d4
```

(29) Selects SPI for incoming ESP SA

```
00000000: 0a de 5f cd
```

(30) Creates message

```
IKE SA Auth  
E9D3F378191C3840.8DDFF401FBFB0B14.00000001 IKEv2 R<-I[334]  
E[306]{  
    IDi[21](FQDN>{"IKE-Initiator"},  
    AUTH[72](Preshared-Key){C99B01...741EE3},  
    N[8](INITIAL_CONTACT),  
    N[12](SET_WINDOW_SIZE){4},  
    CP[16](REQUEST){IP4.Address[0], IP4.DNS[0]},  
    SA[56]{  
        P[52](#1:ESP:0ADE5FCD:5#){  
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
            ENCR_MAGMA_MGM_KTREE,  
            ENCR_KUZNYECHIK_MGM_MAC_KTREE,  
            ENCR_MAGMA_MGM_MAC_KTREE,  
            ESN=Off}},  
    TSi[40](2#){10.111.10.171:icmp:8.0, 0.0.0.0-255.255.255.255},  
    TSR[40](2#){10.0.0.2:icmp:8.0, 10.0.0.0-10.0.0.255},  
    N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  
    N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(31) Composes MGM nonce

```
00000000: 00 00 00 00 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(32)

Composes AAD

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 23 08 00 00 00 01 00 00 01 4e 23 00 01 32
```

(33) Composes plaintext

```
000000000: 27 00 00 15 02 00 00 00 49 4b 45 2d 49 6e 69 74  
000000010: 69 61 74 6f 72 29 00 00 48 02 00 00 00 c9 9b 01  
000000020: 9a 89 ee 56 53 ab 28 25 a1 d7 51 54 ac 01 42 fb  
000000030: d6 2e bc 1e f3 65 73 63 5b 16 81 4b 97 38 b4 20  
000000040: 5d 09 d9 b4 21 b4 0c f4 55 27 80 e7 4c cf 66 d0  
000000050: 14 25 87 7c 20 84 68 d5 79 3a 74 1e e3 29 00 00  
000000060: 08 00 00 40 00 2f 00 00 0c 00 00 40 01 00 00 00  
000000070: 04 21 00 00 10 01 00 00 00 01 00 00 00 03 00  
000000080: 00 2c 00 00 38 00 00 00 34 01 03 04 05 0a de 5f  
000000090: cd 03 00 00 08 01 00 00 20 03 00 00 08 01 00 00  
0000000A0: 21 03 00 00 08 01 00 00 22 03 00 00 08 01 00 00  
0000000B0: 23 00 00 00 08 05 00 00 00 2d 00 00 28 02 00 00  
0000000C0: 00 07 01 00 10 08 00 08 00 0a 6f 0a ab 0a 6f 0a  
0000000D0: ab 07 00 00 10 00 00 ff ff 00 00 00 00 ff ff ff  
0000000E0: ff 29 00 00 28 02 00 00 00 07 01 00 10 08 00 08  
0000000F0: 00 0a 00 00 02 0a 00 00 02 07 00 00 10 00 00 ff  
00000100: ff 0a 00 00 00 0a 00 00 ff 29 00 00 08 00 00 40  
00000110: 0a 00 00 00 08 00 00 40 0b 00
```

(34) Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext

```
00000000: a5 7d 65 70 aa c3 ef f7 df d6 5c 58 f6 2e ea 80
00000010: 82 15 dc 9d ae 42 1c f0 4c e4 cd 2a 45 f0 22 96
00000020: ea d2 06 cc 9b 59 97 9e 45 5d 27 5f b4 fd 55 6a
00000030: 90 bb 14 da df 9f 56 b0 e8 4c 89 a5 d8 f1 f6 55
00000040: a9 f0 82 90 57 28 86 a5 bd 12 85 2f 2e 51 54 29
00000050: fe 04 45 a4 90 f0 f8 0e 8b e9 c7 37 05 8f 6b bb
00000060: 36 b0 24 8a 5f a3 ca f3 7e 7d f9 8e 73 4b b0 14
00000070: ce b0 af 63 4c 4f ea 60 f6 46 4c 61 76 7c 9f 18
00000080: 0c 61 73 fa 30 9f 91 c4 22 c9 ab 61 80 5a de 8e
00000090: 06 40 36 7a 71 59 a5 ad 1c 67 25 03 9b af 2b 04
000000A0: 9f c1 de 51 11 7b f1 16 20 81 78 3f a8 01 d6 c8
000000B0: 79 89 d9 65 3e ea 58 6d ac 48 fc 4a 9a b9 48 02
000000C0: d7 2b 01 5d 6a 2d cb 65 bb ad 99 86 e2 03 08 76
000000D0: 1b dd 7c 56 3c 49 a4 2c da 24 1f ad 54 79 f5 d8
000000E0: 0e 52 8a 49 92 90 66 80 85 00 b7 d8 89 5f b7 f4
000000F0: 92 c1 5b ed 8a 16 00 f3 9a f8 90 4b fa 6a b2 de
00000100: 2a 89 74 9f 99 c7 c3 57 88 5b 88 95 5c ec 46 52
00000110: 04 c4 49 08 05 ab ee 1c 80 f6
```

(35) Computes ICV using K3i as K_msg

```
00000000: 7a 4f 14 38 e6 5f 6b 8c f5 5d 55 f5
```

(36) Composes IV

```
00000000: 00 00 00 00 00 00 00 00 00
```

(37) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [334]

```
00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 2e 20 23 08 00 00 00 01 00 00 01 4e 23 00 01 32
00000020: 00 00 00 00 00 00 00 00 a5 7d 65 70 aa c3 ef f7
00000030: df d6 5c 58 f6 2e ea 80 82 15 dc 9d ae 42 1c f0
00000040: 4c e4 cd 2a 45 f0 22 96 ea d2 06 cc 9b 59 97 9e
00000050: 45 5d 27 5f b4 fd 55 6a 90 bb 14 da df 9f 56 b0
00000060: e8 4c 89 a5 d8 f1 f6 55 a9 f0 82 90 57 28 86 a5
00000070: bd 12 85 2f 2e 51 54 29 fe 04 45 a4 90 f0 f8 0e
00000080: 8b e9 c7 37 05 8f 6b bb 36 b0 24 8a 5f a3 ca f3
00000090: 7e 7d f9 8e 73 4b b0 14 ce b0 af 63 4c 4f ea 60
000000A0: f6 46 4c 61 76 7c 9f 18 0c 61 73 fa 30 9f 91 c4
000000B0: 22 c9 ab 61 80 5a de 8e 06 40 36 7a 71 59 a5 ad
000000C0: 1c 67 25 03 9b af 2b 04 9f c1 de 51 11 7b f1 16
000000D0: 20 81 78 3f a8 01 d6 c8 79 89 d9 65 3e ea 58 6d
000000E0: ac 48 fc 4a 9a b9 48 02 d7 2b 01 5d 6a 2d cb 65
000000F0: bb ad 99 86 e2 03 08 76 1b dd 7c 56 3c 49 a4 2c
00000100: da 24 1f ad 54 79 f5 d8 0e 52 8a 49 92 90 66 80
00000110: 85 00 b7 d8 89 5f b7 f4 92 c1 5b ed 8a 16 00 f3
00000120: 9a f8 90 4b fa 6a b2 de 2a 89 74 9f 99 c7 c3 57
00000130: 88 5b 88 95 5c ec 46 52 04 c4 49 08 05 ab ee 1c
00000140: 80 f6 7a 4f 14 38 e6 5f 6b 8c f5 5d 55 f5
```

Responder's actions:

(38) Computes shared key

```
00000000: a2 43 6c bd 2d c1 0f 81 0d f7 6f 24 ae 78 70 f2
00000010: 27 5d 1b dc c5 52 0e d8 53 e5 c5 43 98 f7 35 ce
00000020: 32 70 89 2b 8e 89 0b 7d b3 98 77 cd bd 31 5d 18
00000030: 10 5d 8b ac 16 f0 aa fd bc dc 7c 69 75 14 48 a8
```

(39) Computes SKEYSEED

```
00000000: fc 7b d9 80 4b 15 00 60 d2 08 17 3a 08 4b a9 2a
00000010: 0f 01 cb c3 ef e9 b5 aa 15 5b 0e 80 24 68 3c 4c
00000020: 6c fb e9 c8 16 7d 54 2d 48 ee 61 71 01 68 ca 68
00000030: 4f 7c b0 1b 61 29 20 9a 68 88 5b 3f d7 19 0b d0
```

(40) Computes SK_d

```
000000000: 6b 2b 83 d7 a9 10 5f f4 27 e8 05 86 b7 f0 09 31  
000000010: 16 43 81 ae 88 7a 3f c9 65 30 73 00 e5 82 81 52  
000000020: 68 07 ba e5 39 ef 6e a7 75 db 2c c9 1c d3 4b 70  
000000030: e0 be 97 14 81 bb 0c 80 ef b3 6e 12 2a 08 74 36
```

(41) Computes SK_ei

```
000000000: 8c 6d f1 8f 6a ff 9f 1b 3e be 40 ef e2 64 c2 bf  
000000010: 8e 6e d7 4c b5 8b 0a 74 a7 30 0c 21 7e 66 c7 d4  
000000020: 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(42) Computes SK_er

```
000000000: df e8 7d 5f 9c da 5e 45 b8 b9 11 02 63 6c 08 47  
000000010: f6 4f c5 5d 6a 7b 4b 91 52 32 0a a2 5e c0 31 34  
000000020: 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(43) Computes SK_pi

```
000000000: 93 11 c6 4c d7 12 b5 40 f9 e8 7e 73 c5 28 a7 d8  
000000010: 89 48 1c f1 bf a3 ad 67 cf b4 d9 6a 9b fe 3c ea  
000000020: 2f cc 2a 5e d4 e4 0b 27 7f be c9 9d c3 8d b7 68  
000000030: 03 c1 f3 f8 94 af 47 8b d8 35 b8 6b c2 ca 38 16
```

(44) Computes SK_pr

```
000000000: 7b b0 4b 24 74 9c 73 68 7f 34 a3 b8 17 6b 9e 30  
000000010: f2 eb 33 73 23 ff 49 1e e3 07 e7 9f 77 b6 2a ef  
000000020: 5a 5e a9 02 8e 90 5c 83 49 ec 1e aa a4 05 bc e1  
000000030: fb c4 5b f0 27 d6 9b 41 77 6f e1 48 f3 37 99 e5
```

(45) Extracts IV from message

```
000000000: 00 00 00 00 00 00 00 00 00
```

(46) Computes K1i (i1 = 0)

```
000000000: f2 ac 10 7a 1f 92 d1 b1 1b b1 74 c3 42 76 a3 3f  
000000010: fa ea 1b 1e 81 10 c1 01 7a 25 9a 00 8d 76 57 de
```

(47) Computes K2i (i2 = 0)

```
000000000: 77 e0 16 18 ad 76 e8 5a 66 2f 88 c4 c0 92 ec 33  
000000010: 6d 23 63 28 28 d5 77 d8 84 e1 01 b1 8d 84 a7 1d
```

(48) Computes K3i (i3 = 0)

```
000000000: 36 ff fa db 84 a9 f1 21 d5 84 16 db eb af 21 a2  
000000010: 12 6d 5c 35 95 fe 89 cf 27 47 52 8a b7 36 92 d4
```

(49) Composes MGM nonce

```
000000000: 00 00 00 00 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(50)

Extracts ICV from message

```
000000000: 7a 4f 14 38 e6 5f 6b 8c f5 5d 55 f5
```

(51) Extracts AAD from message

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 23 08 00 00 00 01 00 00 01 4e 23 00 01 32
```

(52) Extracts ciphertext from message

```
000000000: a5 7d 65 70 aa c3 ef f7 df d6 5c 58 f6 2e ea 80  
000000010: 82 15 dc 9d ae 42 1c f0 4c e4 cd 2a 45 f0 22 96  
000000020: ea d2 06 cc 9b 59 97 9e 45 5d 27 5f b4 fd 55 6a  
000000030: 90 bb 14 da df 9f 56 b0 e8 4c 89 a5 d8 f1 f6 55  
000000040: a9 f0 82 90 57 28 86 a5 bd 12 85 2f 2e 51 54 29  
000000050: fe 04 45 a4 90 f0 f8 0e 8b e9 c7 37 05 8f 6b bb  
000000060: 36 b0 24 8a 5f a3 ca f3 7e 7d f9 8e 73 4b b0 14  
000000070: ce b0 af 63 4c 4f ea 60 f6 46 4c 61 76 7c 9f 18  
000000080: 0c 61 73 fa 30 9f 91 c4 22 c9 ab 61 80 5a de 8e  
000000090: 06 40 36 7a 71 59 a5 ad 1c 67 25 03 9b af 2b 04  
0000000A0: 9f c1 de 51 11 7b f1 16 20 81 78 3f a8 01 d6 c8  
0000000B0: 79 89 d9 65 3e ea 58 6d ac 48 fc 4a 9a b9 48 02  
0000000C0: d7 2b 01 5d 6a 2d cb 65 bb ad 99 86 e2 03 08 76  
0000000D0: 1b dd 7c 56 3c 49 a4 2c da 24 1f ad 54 79 f5 d8  
0000000E0: 0e 52 8a 49 92 90 66 80 85 00 b7 d8 89 5f b7 f4  
0000000F0: 92 c1 5b ed 8a 16 00 f3 9a f8 90 4b fa 6a b2 de  
00000100: 2a 89 74 9f 99 c7 c3 57 88 5b 88 95 5c ec 46 52  
00000110: 04 c4 49 08 05 ab ee 1c 80 f6
```

(53) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext

```

00000000: 27 00 00 15 02 00 00 00 49 4b 45 2d 49 6e 69 74
00000010: 69 61 74 6f 72 29 00 00 48 02 00 00 00 c9 9b 01
00000020: 9a 89 ee 56 53 ab 28 25 a1 d7 51 54 ac 01 42 fb
00000030: d6 2e bc 1e f3 65 73 63 5b 16 81 4b 97 38 b4 20
00000040: 5d 09 d9 b4 21 b4 0c f4 55 27 80 e7 4c cf 66 d0
00000050: 14 25 87 7c 20 84 68 d5 79 3a 74 1e e3 29 00 00
00000060: 08 00 00 40 00 2f 00 00 0c 00 00 40 01 00 00 00
00000070: 04 21 00 00 10 01 00 00 00 01 00 00 00 03 00
00000080: 00 2c 00 00 38 00 00 00 34 01 03 04 05 0a de 5f
00000090: cd 03 00 00 08 01 00 00 20 03 00 00 08 01 00 00
000000A0: 21 03 00 00 08 01 00 00 22 03 00 00 08 01 00 00
000000B0: 23 00 00 00 08 05 00 00 00 2d 00 00 28 02 00 00
000000C0: 00 07 01 00 10 08 00 08 00 0a 6f 0a ab 0a 6f 0a
000000D0: ab 07 00 00 10 00 00 ff ff 00 00 00 00 ff ff ff
000000E0: ff 29 00 00 28 02 00 00 00 07 01 00 10 08 00 08
000000F0: 00 0a 00 00 02 0a 00 00 02 07 00 00 10 00 00 ff
00000100: ff 0a 00 00 00 0a 00 00 ff 29 00 00 08 00 00 40
00000110: 0a 00 00 00 08 00 00 40 0b 00

```

(54) Parses received message

```

IKE SA Auth
E9D3F378191C3840.8DDFF401FBFB0B14.00000001 IKEv2 I->R[334]
E[306]{
    IDi[21](FQDN>{"IKE-Initiator"}, 
    AUTH[72](Preshared-Key){C99B01...741EE3}, 
    N[8](INITIAL_CONTACT), 
    N[12](SET_WINDOW_SIZE){4}, 
    CP[16](REQUEST){IP4.Address[0], IP4.DNS[0]}, 
    SA[56]{
        P[52](#1:ESP:0ADE5FCD:5#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            ENCR_MAGMA_MGM_KTREE,
            ENCR_KUZNYECHIK_MGM_MAC_KTREE,
            ENCR_MAGMA_MGM_MAC_KTREE,
            ESN=Off}},
        TSi[40](2#){10.111.10.171:icmp:8.0, 0.0.0.0-255.255.255.255},
        TSr[40](2#){10.0.0.2:icmp:8.0, 10.0.0.0-10.0.0.255},
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}

```

(55) Computes prf(SK_pi, IDi)

```
000000000: 06 d3 d4 36 ab 5b 4f 41 d4 3d fc 79 1f 13 a3 89  
000000010: e9 a6 6e d7 87 7d 72 d1 9d 71 78 2d 05 ee 47 fb  
000000020: 82 c8 8f 86 cd b5 05 1d 25 7c 1e 79 18 ef 4e 4e  
000000030: 8d ca f4 47 12 c6 7f 6a 32 7d d8 e8 f2 8e f8 33
```

(56) Uses PSK

```
000000000: e2 69 24 cf 15 32 93 47 3a 11 a4 97 a8 a4 5c b3  
000000010: 4e 28 31 ef 0e 28 bb 77 69 69 c6 3c 68 bf e1 0d
```

(57) Computes prf(PSK, "Key Pad for IKEv2")

```
000000000: 01 3c a5 24 59 4e bc 78 99 20 61 6c 3f 03 e5 2e  
000000010: 7a 75 2a 0b 78 36 bd 0a 89 ce 1d e7 8b 23 32 ae  
000000020: 08 9a a0 03 1d da f6 14 8c 38 c6 bd 7c 03 13 24  
000000030: bd af c8 ad 88 18 8f 41 d0 12 b9 e1 5a 66 8f 10
```

(58) Computes content of AUTH payload and compares it with the received one

```
000000000: c9 9b 01 9a 89 ee 56 53 ab 28 25 a1 d7 51 54 ac  
000000010: 01 42 fb d6 2e bc 1e f3 65 73 63 5b 16 81 4b 97  
000000020: 38 b4 20 5d 09 d9 b4 21 b4 0c f4 55 27 80 e7 4c  
000000030: cf 66 d0 14 25 87 7c 20 84 68 d5 79 3a 74 1e e3
```

(59) Computes keys for ESP SAs

```
000000000: ff 42 3b a3 78 29 2b 10 52 c8 bf 06 fa ba 6d 5f  
000000010: e2 db 51 1b 74 1b 54 ad 35 85 e3 cf 2b 77 52 42  
000000020: bc 8c d8 ba dd f4 46 9e 89 41 5c d6  
000000000: 8c eb 84 af 18 01 18 36 b7 8d 65 be 03 ca 69 64  
000000010: 89 6e a8 91 03 bc 9a dc bd 49 10 ab 20 83 9f 83  
000000020: b1 7c 45 9d ab d8 ab 6f de 6a 62 d1
```

(60) Computes prf(SK_pr, IDr)

```
000000000: 32 61 00 71 e8 1a d6 a1 12 8d ef 4e 2a e9 bb c2  
000000010: 9f 3d ba 28 1b 2a a5 10 a2 ad c6 b1 73 07 c9 f1  
000000020: 50 9e 1c d7 a5 85 8f a8 40 ef dd a7 ae 33 71 74  
000000030: c8 8b a9 f4 3a 83 0f c1 c5 3c 9b 21 9f a9 58 25
```

(61) Uses PSK

```
000000000: e2 69 24 cf 15 32 93 47 3a 11 a4 97 a8 a4 5c b3  
000000010: 4e 28 31 ef 0e 28 bb 77 69 69 c6 3c 68 bf e1 0d
```

(62) Computes prf(PSK, "Key Pad for IKEv2")

```
000000000: 01 3c a5 24 59 4e bc 78 99 20 61 6c 3f 03 e5 2e  
000000010: 7a 75 2a 0b 78 36 bd 0a 89 ce 1d e7 8b 23 32 ae  
000000020: 08 9a a0 03 1d da f6 14 8c 38 c6 bd 7c 03 13 24  
000000030: bd af c8 ad 88 18 8f 41 d0 12 b9 e1 5a 66 8f 10
```

(63) Computes content of AUTH payload

```
000000000: 35 ce 8a ab dd 3d b1 5f 38 7b 2e c9 a6 24 7a 1f  
000000010: a7 bb a0 6f b6 5e d8 81 07 d3 43 c8 a5 db 37 51  
000000020: 0e 9d 9a 85 66 18 7a 0f 5c e2 1b fb 27 56 65 ed  
000000030: 0e 41 fe ce 5e 95 bf 8a ae 57 f6 d6 26 d2 d1 2d
```

(64) Computes K1r (i1 = 0)

```
000000000: 61 cd ad b1 01 10 71 7c dc 18 81 1d 1f aa e3 13  
000000010: 4b 07 f8 f7 49 a7 3d 0a 57 2f e1 61 bc ab 85 c4
```

(65) Computes K2r (i2 = 0)

```
000000000: 5f e7 47 77 da f7 54 d7 a8 e5 eb ed f9 82 c8 a9  
000000010: 74 0c 54 77 6f eb b8 70 a4 43 43 3e c2 9e ce a6
```

(66) Computes K3r (i3 = 0)

```
000000000: e8 af 72 c4 c3 55 a2 6a fb ad 37 fd b4 b9 7f d6  
000000010: f6 c8 cc 32 3f 50 32 40 06 86 ce 85 1b 02 28 f3
```

(67) Selects SPI for incoming ESP SA

```
000000000: 50 3c 8d af
```

(68) Creates message

```
IKE SA Auth  
E9D3F378191C3840.8DDFF401FBFB0B14.00000001 IKEv2 I<=R[286]  
E[258]{  
    IDr[21](FQDN>{"IKE-Responder"},  
    AUTH[72](Preshared-Key){35CE8A...D2D12D},  
    N[8](INITIAL_CONTACT),  
    N[12](SET_WINDOW_SIZE){64},  
    CP[16](REPLY){IP4.Address[4]=10.1.1.2},  
    SA[32]{  
        P[28] (#1:ESP:503C8DAF:2#){  
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
            ESN=Off}},  
        TSi[24](1#){10.1.1.2},  
        TSr[24](1#){10.0.0.0-10.0.0.255},  
        N[8](ADDITIONAL_TS_POSSIBLE),  
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(69)

Composes MGM nonce

```
000000000: 00 00 00 00 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(70) Composes AAD

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 23 20 00 00 00 01 00 00 01 1e 24 00 01 02
```

(71) Composes plaintext

```
000000000: 27 00 00 15 02 00 00 00 49 4b 45 2d 52 65 73 70  
000000010: 6f 6e 64 65 72 29 00 00 48 02 00 00 00 35 ce 8a  
000000020: ab dd 3d b1 5f 38 7b 2e c9 a6 24 7a 1f a7 bb a0  
000000030: 6f b6 5e d8 81 07 d3 43 c8 a5 db 37 51 0e 9d 9a  
000000040: 85 66 18 7a 0f 5c e2 1b fb 27 56 65 ed 0e 41 fe  
000000050: ce 5e 95 bf 8a ae 57 f6 d6 26 d2 d1 2d 29 00 00  
000000060: 08 00 00 40 00 2f 00 00 0c 00 00 40 01 00 00 00  
000000070: 40 21 00 00 10 02 00 00 00 01 00 04 0a 01 01  
000000080: 02 2c 00 00 20 00 00 00 1c 01 03 04 02 50 3c 8d  
000000090: af 03 00 00 08 01 00 00 20 00 00 00 08 05 00 00  
0000000A0: 00 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff  
0000000B0: ff 0a 01 01 02 0a 01 01 02 29 00 00 18 01 00 00  
0000000C0: 00 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00  
0000000D0: ff 29 00 00 08 00 00 40 02 29 00 00 08 00 00 40  
0000000E0: 0a 00 00 00 08 00 00 40 0b 00
```

(72) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

```
00000000: 9b 5d 58 8a 99 44 11 d6 5b 93 7f 98 57 0d 0f 09  
00000010: 0c a3 d9 36 41 b5 9c 91 94 17 3a cb 00 88 24 5e  
00000020: 25 b7 0d 75 2f fb 4d d0 ab 2c cc 84 42 e7 f8 1b  
00000030: 5a e6 88 13 9a 3e b1 03 79 31 0c 69 f6 17 a2 40  
00000040: f8 aa 74 2e 62 29 ee 57 43 3f 10 bf 44 73 51 97  
00000050: 2c 93 a4 02 87 3d 37 45 2c f1 3e 16 c3 d9 ec b3  
00000060: b8 6f 66 1a f1 73 44 7c db 74 11 e6 07 4a 75 23  
00000070: 83 df 00 52 ae 68 60 39 83 4c c3 b1 d5 7a e8 7f  
00000080: 61 59 9e 4f 92 3c 2f 04 3b c3 ac e7 23 3f 1c a7  
00000090: a5 3f 4d 33 1f 46 25 9f 09 5e f4 75 e0 12 32 5b  
000000A0: 29 64 a4 40 1a b5 c9 cd 9e 8f 91 cc 5b 7d 14 15  
000000B0: d0 89 70 e0 c6 d8 e4 e0 93 ff 02 4c 69 db ab 84  
000000C0: d6 8f b9 f9 ed 07 aa 96 29 2a 50 c2 c4 b6 e5 cb  
000000D0: 8e 16 33 7a 20 a4 3b 0e f2 53 9b b1 63 c0 46 4b  
000000E0: d9 31 a8 98 f5 17 8a ff 0a c0
```

(73) Computes ICV using K3r as K_msg

```
00000000: 4a db a4 67 7e a1 3c 54 22 1f cf 62
```

(74) Composes IV

```
00000000: 00 00 00 00 00 00 00 00 00
```

(75) Sends message, peer receives message

10.111.10.171:54294<-10.111.15.45:500 [286]

```
00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 2e 20 23 20 00 00 00 01 00 00 01 1e 24 00 01 02
00000020: 00 00 00 00 00 00 00 00 9b 5d 58 8a 99 44 11 d6
00000030: 5b 93 7f 98 57 0d 0f 09 0c a3 d9 36 41 b5 9c 91
00000040: 94 17 3a cb 00 88 24 5e 25 b7 0d 75 2f fb 4d d0
00000050: ab 2c cc 84 42 e7 f8 1b 5a e6 88 13 9a 3e b1 03
00000060: 79 31 0c 69 f6 17 a2 40 f8 aa 74 2e 62 29 ee 57
00000070: 43 3f 10 bf 44 73 51 97 2c 93 a4 02 87 3d 37 45
00000080: 2c f1 3e 16 c3 d9 ec b3 b8 6f 66 1a f1 73 44 7c
00000090: db 74 11 e6 07 4a 75 23 83 df 00 52 ae 68 60 39
000000A0: 83 4c c3 b1 d5 7a e8 7f 61 59 9e 4f 92 3c 2f 04
000000B0: 3b c3 ac e7 23 3f 1c a7 a5 3f 4d 33 1f 46 25 9f
000000C0: 09 5e f4 75 e0 12 32 5b 29 64 a4 40 1a b5 c9 cd
000000D0: 9e 8f 91 cc 5b 7d 14 15 d0 89 70 e0 c6 d8 e4 e0
000000E0: 93 ff 02 4c 69 db ab 84 d6 8f b9 f9 ed 07 aa 96
000000F0: 29 2a 50 c2 c4 b6 e5 cb 8e 16 33 7a 20 a4 3b 0e
00000100: f2 53 9b b1 63 c0 46 4b d9 31 a8 98 f5 17 8a ff
00000110: 0a c0 4a db a4 67 7e a1 3c 54 22 1f cf 62
```

Initiator's actions:

(76) Extracts IV from message

```
00000000: 00 00 00 00 00 00 00 00
```

(77) Computes K1r (i1 = 0)

```
00000000: 61 cd ad b1 01 10 71 7c dc 18 81 1d 1f aa e3 13
00000010: 4b 07 f8 f7 49 a7 3d 0a 57 2f e1 61 bc ab 85 c4
```

(78) Computes K2r (i2 = 0)

```
00000000: 5f e7 47 77 da f7 54 d7 a8 e5 eb ed f9 82 c8 a9
00000010: 74 0c 54 77 6f eb b8 70 a4 43 43 3e c2 9e ce a6
```

(79) Computes K3r (i3 = 0)

```
000000000: e8 af 72 c4 c3 55 a2 6a fb ad 37 fd b4 b9 7f d6  
000000010: f6 c8 cc 32 3f 50 32 40 06 86 ce 85 1b 02 28 f3
```

(80) Composes MGM nonce

```
000000000: 00 00 00 00 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(81) Extracts ICV from message

```
000000000: 4a db a4 67 7e a1 3c 54 22 1f cf 62
```

(82) Extracts AAD from message

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 23 20 00 00 00 01 00 00 01 1e 24 00 01 02
```

(83) Extracts ciphertext from message

```
00000000: 9b 5d 58 8a 99 44 11 d6 5b 93 7f 98 57 0d 0f 09  
00000010: 0c a3 d9 36 41 b5 9c 91 94 17 3a cb 00 88 24 5e  
00000020: 25 b7 0d 75 2f fb 4d d0 ab 2c cc 84 42 e7 f8 1b  
00000030: 5a e6 88 13 9a 3e b1 03 79 31 0c 69 f6 17 a2 40  
00000040: f8 aa 74 2e 62 29 ee 57 43 3f 10 bf 44 73 51 97  
00000050: 2c 93 a4 02 87 3d 37 45 2c f1 3e 16 c3 d9 ec b3  
00000060: b8 6f 66 1a f1 73 44 7c db 74 11 e6 07 4a 75 23  
00000070: 83 df 00 52 ae 68 60 39 83 4c c3 b1 d5 7a e8 7f  
00000080: 61 59 9e 4f 92 3c 2f 04 3b c3 ac e7 23 3f 1c a7  
00000090: a5 3f 4d 33 1f 46 25 9f 09 5e f4 75 e0 12 32 5b  
000000A0: 29 64 a4 40 1a b5 c9 cd 9e 8f 91 cc 5b 7d 14 15  
000000B0: d0 89 70 e0 c6 d8 e4 e0 93 ff 02 4c 69 db ab 84  
000000C0: d6 8f b9 f9 ed 07 aa 96 29 2a 50 c2 c4 b6 e5 cb  
000000D0: 8e 16 33 7a 20 a4 3b 0e f2 53 9b b1 63 c0 46 4b  
000000E0: d9 31 a8 98 f5 17 8a ff 0a c0
```

- (84) Decrypts ciphertext and verifies ICV using K_{3r} as K_{msg}, resulted in plaintext

```
00000000: 27 00 00 15 02 00 00 00 49 4b 45 2d 52 65 73 70  
00000010: 6f 6e 64 65 72 29 00 00 48 02 00 00 00 35 ce 8a  
00000020: ab dd 3d b1 5f 38 7b 2e c9 a6 24 7a 1f a7 bb a0  
00000030: 6f b6 5e d8 81 07 d3 43 c8 a5 db 37 51 0e 9d 9a  
00000040: 85 66 18 7a 0f 5c e2 1b fb 27 56 65 ed 0e 41 fe  
00000050: ce 5e 95 bf 8a ae 57 f6 d6 26 d2 d1 2d 29 00 00  
00000060: 08 00 00 40 00 2f 00 00 0c 00 00 40 01 00 00 00  
00000070: 40 21 00 00 10 02 00 00 00 01 00 04 0a 01 01  
00000080: 02 2c 00 00 20 00 00 00 1c 01 03 04 02 50 3c 8d  
00000090: af 03 00 00 08 01 00 00 20 00 00 00 08 05 00 00  
000000A0: 00 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff  
000000B0: ff 0a 01 01 02 0a 01 01 02 29 00 00 18 01 00 00  
000000C0: 00 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00  
000000D0: ff 29 00 00 08 00 00 40 02 29 00 00 08 00 00 40  
000000E0: 0a 00 00 00 08 00 00 40 0b 00
```

- (85) Parses received message

```

IKE SA Auth
E9D3F378191C3840.8DDFF401FBFB0B14.00000001 IKEv2 R=>I[286]
E[258]{
    IDr[21](FQDN>{"IKE-Responder"}, 
    AUTH[72](Preshared-Key){35CE8A...D2D12D}, 
    N[8](INITIAL_CONTACT), 
    N[12](SET_WINDOW_SIZE){64}, 
    CP[16](REPLY){IP4.Address[4]=10.1.1.2}, 
    SA[32]{
        P[28](#1:ESP:503C8DAF:2#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            ESN=Off}},
        TSi[24](1#){10.1.1.2},
        TSR[24](1#){10.0.0.0-10.0.0.255},
        N[8](ADDITIONAL_TS_POSSIBLE),
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
}

```

(86) Computes prf(SK_pr, IDr)

```

00000000: 32 61 00 71 e8 1a d6 a1 12 8d ef 4e 2a e9 bb c2
00000010: 9f 3d ba 28 1b 2a a5 10 a2 ad c6 b1 73 07 c9 f1
00000020: 50 9e 1c d7 a5 85 8f a8 40 ef dd a7 ae 33 71 74
00000030: c8 8b a9 f4 3a 83 0f c1 c5 3c 9b 21 9f a9 58 25

```

(87) Uses PSK

```

00000000: e2 69 24 cf 15 32 93 47 3a 11 a4 97 a8 a4 5c b3
00000010: 4e 28 31 ef 0e 28 bb 77 69 69 c6 3c 68 bf e1 0d

```

(88) Computes prf(PSK, "Key Pad for IKEv2")

```

00000000: 01 3c a5 24 59 4e bc 78 99 20 61 6c 3f 03 e5 2e
00000010: 7a 75 2a 0b 78 36 bd 0a 89 ce 1d e7 8b 23 32 ae
00000020: 08 9a a0 03 1d da f6 14 8c 38 c6 bd 7c 03 13 24
00000030: bd af c8 ad 88 18 8f 41 d0 12 b9 e1 5a 66 8f 10

```

- (89) Computes content of AUTH payload and compares it with the received one

```
00000000: 35 ce 8a ab dd 3d b1 5f 38 7b 2e c9 a6 24 7a 1f  
00000010: a7 bb a0 6f b6 5e d8 81 07 d3 43 c8 a5 db 37 51  
00000020: 0e 9d 9a 85 66 18 7a 0f 5c e2 1b fb 27 56 65 ed  
00000030: 0e 41 fe ce 5e 95 bf 8a ae 57 f6 d6 26 d2 d1 2d
```

- (90) Computes keys for ESP SAs

```
00000000: ff 42 3b a3 78 29 2b 10 52 c8 bf 06 fa ba 6d 5f  
00000010: e2 db 51 1b 74 1b 54 ad 35 85 e3 cf 2b 77 52 42  
00000020: bc 8c d8 ba dd f4 46 9e 89 41 5c d6  
00000000: 8c eb 84 af 18 01 18 36 b7 8d 65 be 03 ca 69 64  
00000010: 89 6e a8 91 03 bc 9a dc bd 49 10 ab 20 83 9f 83  
00000020: b1 7c 45 9d ab d8 ab 6f de 6a 62 d1
```

Sub-scenario 2: IKE SA rekeying using the CREATE_CHILD_SA exchange.



Initiator's actions:

- (1) Generates random SPIi for new IKE SA

```
00000000: 43 87 64 8d 6c 9e 28 ff
```

- (2) Generates random IKE nonce Ni

```
00000000: 6c 83 67 41 1b 45 94 1d 79 94 51 2d 3f 7d 1e ce
00000010: 06 76 a6 09 cc a9 3a 8f f8 17 81 ff 28 08 5a 4c
```

(3) Generates ephemeral private key

```
00000000: cf 8f f0 df 04 24 43 b5 7e 15 2c bd 9f cd bd d9
00000010: 20 b5 35 7c e8 8b a6 d7 bd 7f 32 39 3d 5e 9a 3c
00000020: eb 88 4f 7f 6c 5d 03 05 fc bf 08 12 41 76 f4 a6
00000030: 2e 4c f7 ce 55 18 9d 6a 54 1f f7 57 46 23 cd 26
```

(4) Computes public key

```
00000000: 04 db 0b d3 9a ac 83 f3 e9 9d a9 11 c3 12 f6 df
00000010: f6 ae 99 38 55 20 1f 83 c8 28 ed 14 f9 68 88 77
00000020: ac 78 36 41 7a d7 93 a7 ee 4c 6a d7 f2 50 24 f5
00000030: a8 7b 03 28 22 9f a4 66 11 20 57 64 56 7c 36 3c
00000040: 72 c7 91 0a 1c fd 64 54 f1 17 97 6a 35 48 dc 8f
00000050: 85 97 20 12 2f 35 55 58 9b ca 7a 84 f3 01 cf ca
00000060: 78 e7 41 87 d3 3f 0f 2b 6d 78 59 ad f2 f2 c2 97
00000070: db 0b 75 6e 00 38 a2 72 8d 17 6b 44 f9 8b 95 66
```

(5) Creates message

```
Create Child SA
E9D3F378191C3840.8DDFF401FBFB0B14.00000002 IKEv2 R<-I [281]
E[253]{
    SA[44]{
        P[40](#1:IKE:4387648D6C9E28FF:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            PRF=PRF_HMAC_STREEBOG_512,
            KE=GOST3410_2012_512} },
        NONCE[36]{6C8367...085A4C},
        KE[136](GOST3410_2012_512){04DB0B...8B9566},
        N[12](SET_WINDOW_SIZE){4}}
```

(6)

Uses previously computed key K3i

```
000000000: 36 ff fa db 84 a9 f1 21 d5 84 16 db eb af 21 a2  
000000010: 12 6d 5c 35 95 fe 89 cf 27 47 52 8a b7 36 92 d4
```

(7)

Composes MGM nonce

```
000000000: 00 00 00 01 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(8)

Composes AAD

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 24 08 00 00 00 02 00 00 01 19 21 00 00 fd
```

(9)

Composes plaintext

```
000000000: 28 00 00 2c 00 00 00 28 01 01 08 03 43 87 64 8d  
000000010: 6c 9e 28 ff 03 00 00 08 01 00 00 20 03 00 00 08  
000000020: 02 00 00 09 00 00 00 08 04 00 00 22 22 00 00 24  
000000030: 6c 83 67 41 1b 45 94 1d 79 94 51 2d 3f 7d 1e ce  
000000040: 06 76 a6 09 cc a9 3a 8f f8 17 81 ff 28 08 5a 4c  
000000050: 29 00 00 88 00 22 00 00 04 db 0b d3 9a ac 83 f3  
000000060: e9 9d a9 11 c3 12 f6 df f6 ae 99 38 55 20 1f 83  
000000070: c8 28 ed 14 f9 68 88 77 ac 78 36 41 7a d7 93 a7  
000000080: ee 4c 6a d7 f2 50 24 f5 a8 7b 03 28 22 9f a4 66  
000000090: 11 20 57 64 56 7c 36 3c 72 c7 91 0a 1c fd 64 54  
0000000A0: f1 17 97 6a 35 48 dc 8f 85 97 20 12 2f 35 55 58  
0000000B0: 9b ca 7a 84 f3 01 cf ca 78 e7 41 87 d3 3f 0f 2b  
0000000C0: 6d 78 59 ad f2 f2 c2 97 db 0b 75 6e 00 38 a2 72  
0000000D0: 8d 17 6b 44 f9 8b 95 66 00 00 00 0c 00 00 40 01  
0000000E0: 00 00 00 04 00
```

(10)

Encrypts plaintext using K3i as K_msg, resulted in ciphertext

```
00000000: 00 16 cf 92 8a 87 4c 02 79 31 04 22 c3 d9 5f fd
00000010: 5a 19 23 62 25 d1 99 c2 af 75 4d f1 3c ac c0 c1
00000020: c7 db d0 fd 93 ac 6d 25 b4 19 01 e6 df e8 51 c2
00000030: 88 a9 8a 26 92 98 ec ce c1 2f cf ca ce 9b 5a 6d
00000040: 4c 8b cf 97 63 5a a3 e6 46 49 0f 1f 05 54 00 49
00000050: 6b d8 14 f4 e2 ee b3 66 2a 13 9b dd 63 53 7a 82
00000060: 2a d8 bf 48 aa db 79 21 d3 d8 ac b1 ac 8f 9b 41
00000070: a7 49 81 95 d7 54 46 e2 00 9b 17 3a ab 9a 4c 8f
00000080: 19 9e ac 61 cc f6 02 47 a1 7e f4 48 5b e7 3c a7
00000090: 53 dc 03 9e ea 5f c4 99 60 6e db 6a 21 fe 7c 7b
000000A0: 11 ed bf 44 59 73 fa 65 01 98 e4 e6 10 63 87 27
000000B0: 8b f0 8c bb 94 52 dd 97 ee dc ce 88 c4 45 b4 16
000000C0: f2 8b d4 74 cb 46 38 57 f4 44 88 23 44 06 d9 91
000000D0: 00 ea 81 2c e7 f6 66 0f a8 45 0f 1d 8c 2d f1 02
000000E0: a2 06 78 c7 e0
```

(11) Computes ICV using K3i as K_msg

```
00000000: b1 2f da a5 96 fa 27 ee 67 de 9e 95
```

(12) Composes IV

```
00000000: 00 00 00 00 00 00 00 00 01
```

(13) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [281]

```
00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 2e 20 24 08 00 00 00 02 00 00 01 19 21 00 00 fd
00000020: 00 00 00 00 00 00 00 01 00 16 cf 92 8a 87 4c 02
00000030: 79 31 04 22 c3 d9 5f fd 5a 19 23 62 25 d1 99 c2
00000040: af 75 4d f1 3c ac c0 c1 c7 db d0 fd 93 ac 6d 25
00000050: b4 19 01 e6 df e8 51 c2 88 a9 8a 26 92 98 ec ce
00000060: c1 2f cf ca ce 9b 5a 6d 4c 8b cf 97 63 5a a3 e6
00000070: 46 49 0f 1f 05 54 00 49 6b d8 14 f4 e2 ee b3 66
00000080: 2a 13 9b dd 63 53 7a 82 2a d8 bf 48 aa db 79 21
00000090: d3 d8 ac b1 ac 8f 9b 41 a7 49 81 95 d7 54 46 e2
000000A0: 00 9b 17 3a ab 9a 4c 8f 19 9e ac 61 cc f6 02 47
000000B0: a1 7e f4 48 5b e7 3c a7 53 dc 03 9e ea 5f c4 99
000000C0: 60 6e db 6a 21 fe 7c 7b 11 ed bf 44 59 73 fa 65
000000D0: 01 98 e4 e6 10 63 87 27 8b f0 8c bb 94 52 dd 97
000000E0: ee dc ce 88 c4 45 b4 16 f2 8b d4 74 cb 46 38 57
000000F0: f4 44 88 23 44 06 d9 91 00 ea 81 2c e7 f6 66 0f
00000100: a8 45 0f 1d 8c 2d f1 02 a2 06 78 c7 e0 b1 2f da
00000110: a5 96 fa 27 ee 67 de 9e 95
```

Responder's actions:

(14) Extracts IV from message

```
00000000: 00 00 00 00 00 00 00 01
```

(15) Uses previously computed key K3i

```
00000000: 36 ff fa db 84 a9 f1 21 d5 84 16 db eb af 21 a2
00000010: 12 6d 5c 35 95 fe 89 cf 27 47 52 8a b7 36 92 d4
```

(16) Composes MGM nonce

```
00000000: 00 00 00 01 83 00 37 c3 08 01 7e c3 0a 71 62 01
```

(17)

Extracts ICV from message

```
000000000: b1 2f da a5 96 fa 27 ee 67 de 9e 95
```

(18) Extracts AAD from message

```
000000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
000000010: 2e 20 24 08 00 00 00 02 00 00 01 19 21 00 00 fd
```

(19) Extracts ciphertext from message

```
000000000: 00 16 cf 92 8a 87 4c 02 79 31 04 22 c3 d9 5f fd  
000000010: 5a 19 23 62 25 d1 99 c2 af 75 4d f1 3c ac c0 c1  
000000020: c7 db d0 fd 93 ac 6d 25 b4 19 01 e6 df e8 51 c2  
000000030: 88 a9 8a 26 92 98 ec ce c1 2f cf ca ce 9b 5a 6d  
000000040: 4c 8b cf 97 63 5a a3 e6 46 49 0f 1f 05 54 00 49  
000000050: 6b d8 14 f4 e2 ee b3 66 2a 13 9b dd 63 53 7a 82  
000000060: 2a d8 bf 48 aa db 79 21 d3 d8 ac b1 ac 8f 9b 41  
000000070: a7 49 81 95 d7 54 46 e2 00 9b 17 3a ab 9a 4c 8f  
000000080: 19 9e ac 61 cc f6 02 47 a1 7e f4 48 5b e7 3c a7  
000000090: 53 dc 03 9e ea 5f c4 99 60 6e db 6a 21 fe 7c 7b  
0000000A0: 11 ed bf 44 59 73 fa 65 01 98 e4 e6 10 63 87 27  
0000000B0: 8b f0 8c bb 94 52 dd 97 ee dc ce 88 c4 45 b4 16  
0000000C0: f2 8b d4 74 cb 46 38 57 f4 44 88 23 44 06 d9 91  
0000000D0: 00 ea 81 2c e7 f6 66 0f a8 45 0f 1d 8c 2d f1 02  
0000000E0: a2 06 78 c7 e0
```

(20) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext

```
00000000: 28 00 00 2c 00 00 00 28 01 01 08 03 43 87 64 8d
00000010: 6c 9e 28 ff 03 00 00 08 01 00 00 20 03 00 00 08
00000020: 02 00 00 09 00 00 00 08 04 00 00 22 22 00 00 24
00000030: 6c 83 67 41 1b 45 94 1d 79 94 51 2d 3f 7d 1e ce
00000040: 06 76 a6 09 cc a9 3a 8f f8 17 81 ff 28 08 5a 4c
00000050: 29 00 00 88 00 22 00 00 04 db 0b d3 9a ac 83 f3
00000060: e9 9d a9 11 c3 12 f6 df f6 ae 99 38 55 20 1f 83
00000070: c8 28 ed 14 f9 68 88 77 ac 78 36 41 7a d7 93 a7
00000080: ee 4c 6a d7 f2 50 24 f5 a8 7b 03 28 22 9f a4 66
00000090: 11 20 57 64 56 7c 36 3c 72 c7 91 0a 1c fd 64 54
000000A0: f1 17 97 6a 35 48 dc 8f 85 97 20 12 2f 35 55 58
000000B0: 9b ca 7a 84 f3 01 cf ca 78 e7 41 87 d3 3f 0f 2b
000000C0: 6d 78 59 ad f2 f2 c2 97 db 0b 75 6e 00 38 a2 72
000000D0: 8d 17 6b 44 f9 8b 95 66 00 00 00 0c 00 00 40 01
000000E0: 00 00 00 04 00
```

(21) Parses received message

```
Create Child SA
E9D3F378191C3840.8DDFF401FBFB0B14.00000002 IKEv2 I->R[281]
E[253]{
    SA[44]{
        P[40](#1:IKE:4387648D6C9E28FF:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            PRF=PRF_HMAC_STREEBOG_512,
            KE=GOST3410_2012_512} },
        NONCE[36]{6C8367...085A4C},
        KE[136](GOST3410_2012_512){04DB0B...8B9566},
        N[12](SET_WINDOW_SIZE){4}}
```

(22) Generates random SPIr for new IKE SA

```
00000000: 82 d9 fa f8 74 49 b9 36
```

(23) Generates random IKE nonce Nr

```
000000000: 5a 2d d2 68 c6 85 5d 32 d4 7b 0b 8e ae 7d c9 81  
000000010: be 3e 69 c1 bb f5 ae 89 55 59 c7 48 bc 96 43 7b
```

(24) Generates ephemeral private key

```
000000000: b9 ea c6 c1 84 db 39 54 e3 e7 74 be 02 e0 c9 0b  
000000010: 5c b9 72 03 d4 fc a2 3f b6 cf 71 8d 4f f4 b4 c5  
000000020: 21 1c 93 f9 86 cc 6b cb db ff 78 51 5b b6 48 e8  
000000030: 44 ce c0 83 c9 d0 b8 90 08 94 db 29 9f bb c2 1a
```

(25) Computes public key

```
000000000: b9 f9 27 a8 96 70 7a 03 58 c2 39 58 63 2d 50 20  
000000010: bf 69 c0 1d a6 de d4 4d 65 aa 26 c6 8f 9f e9 e9  
000000020: 4b bb da 1d 2f d3 60 2d 18 33 04 9b b2 25 a6 07  
000000030: ac 58 1b fc 3c 5b 1e f3 4b c0 f9 cb 90 14 c6 80  
000000040: 6e c3 73 c1 4a f7 5c 27 dd 2a e1 ba 94 9c f7 06  
000000050: 68 92 19 8e 85 67 f9 d2 d1 ea 3c 16 16 b9 3f 0c  
000000060: 8b 2d 2e d6 20 14 7e 27 18 d3 23 9e 2a 99 41 40  
000000070: 6a 41 c5 3f 79 9c a7 22 79 15 98 1d 98 b5 ac 4a
```

(26) Computes shared key

```
000000000: dd e7 44 39 1c d9 66 cf d2 24 a4 bb 0a 57 b3 3e  
000000010: 1a 8f 5d 07 11 4d c3 47 87 1a 13 ec 84 26 03 f8  
000000020: ea 93 5a f5 23 a3 45 71 ff 5f f2 3d 59 43 3a 5e  
000000030: eb 5e 79 fa 0e 62 9e bc af ca e4 ee 7a 81 3a 84
```

(27) Computes SKEYSEED for new SA

```
00000000: ec 5f 4f 15 ce d7 7d 2f 12 fb a1 df 5f 44 aa 88  
00000010: 6a ef 45 e4 04 97 86 95 15 1b 3c ac 31 cc 57 a3  
00000020: f0 f4 92 89 33 00 76 2b e9 fd 8b c2 ed 8b e7 36  
00000030: cb 17 59 55 9e cc 22 14 72 a5 79 27 27 1d 06 62
```

(28) Computes SK_d for new SA

```
00000000: 08 58 14 7d eb c9 41 7f 7f a2 86 66 bf d4 76 37  
00000010: 04 27 4e bc 5d 63 f7 07 79 62 69 7a 69 3c da 7a  
00000020: d5 4d 6f 08 1e 14 51 66 2f 94 0d bd 29 45 9c b0  
00000030: 51 26 09 4b 47 52 ba 19 98 a5 c2 65 af 84 a1 34
```

(29) Computes SK_ei for new SA

```
00000000: 18 0a 4f 98 7d a4 21 6c 68 84 94 1f d9 28 49 b9  
00000010: 05 30 f8 aa 43 02 7e 0d aa d3 27 e9 8c 9a 39 9a  
00000020: 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca
```

(30) Computes SK_er for new SA

```
00000000: 47 dc aa 71 4a 8b 66 13 d8 09 79 c7 8c 72 0a 78  
00000010: 06 48 6d 4f 1f 53 3a 91 1d b7 2c 86 f5 f1 4e 00  
00000020: 84 57 87 2b 38 70 63 27 8c dd 88 78
```

(31) Creates message

```
Create Child SA
E9D3F378191C3840.8DDFF401FBFB0B14.00000002 IKEv2 I<=R[281]
E[253]{
    SA[44]{
        P[40](#1:IKE:82D9FAF87449B936:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            PRF=PRF_HMAC_STREEBOG_512,
            KE=GOST3410_2012_512},
        NONCE[36]{5A2DD2...96437B},
        KE[136](GOST3410_2012_512){B9F927...B5AC4A},
        N[12](SET_WINDOW_SIZE){64}}
    }
```

(32) Uses previously computed key K3r

```
00000000: e8 af 72 c4 c3 55 a2 6a fb ad 37 fd b4 b9 7f d6
00000010: f6 c8 cc 32 3f 50 32 40 06 86 ce 85 1b 02 28 f3
```

(33) Composes MGM nonce

```
00000000: 00 00 00 01 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(34) Composes AAD

```
00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 2e 20 24 20 00 00 00 02 00 00 01 19 21 00 00 fd
```

(35) Composes plaintext

```
00000000: 28 00 00 2c 00 00 00 28 01 01 08 03 82 d9 fa f8
00000010: 74 49 b9 36 03 00 00 08 01 00 00 20 03 00 00 08
00000020: 02 00 00 09 00 00 00 08 04 00 00 22 22 00 00 24
00000030: 5a 2d d2 68 c6 85 5d 32 d4 7b 0b 8e ae 7d c9 81
00000040: be 3e 69 c1 bb f5 ae 89 55 59 c7 48 bc 96 43 7b
00000050: 29 00 00 88 00 22 00 00 b9 f9 27 a8 96 70 7a 03
00000060: 58 c2 39 58 63 2d 50 20 bf 69 c0 1d a6 de d4 4d
00000070: 65 aa 26 c6 8f 9f e9 e9 4b bb da 1d 2f d3 60 2d
00000080: 18 33 04 9b b2 25 a6 07 ac 58 1b fc 3c 5b 1e f3
00000090: 4b c0 f9 cb 90 14 c6 80 6e c3 73 c1 4a f7 5c 27
000000A0: dd 2a e1 ba 94 9c f7 06 68 92 19 8e 85 67 f9 d2
000000B0: d1 ea 3c 16 16 b9 3f 0c 8b 2d 2e d6 20 14 7e 27
000000C0: 18 d3 23 9e 2a 99 41 40 6a 41 c5 3f 79 9c a7 22
000000D0: 79 15 98 1d 98 b5 ac 4a 00 00 00 0c 00 00 40 01
000000E0: 00 00 00 40 00
```

(36) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

```
00000000: fd ee 4c 8f 78 ff b6 0c fc 65 bb ef db 53 56 a2
00000010: d3 2d 4f 59 ff 28 38 eb 76 0b 40 5e 8d 52 e8 c1
00000020: b9 75 22 b4 bb 71 8f 16 3a 97 0e 4d 95 ef bc 84
00000030: 46 c6 77 1e 4b 14 73 46 89 ed d4 b4 54 a2 64 19
00000040: 67 b2 98 7e 8b d4 45 31 17 1e e4 ae f4 24 44 42
00000050: dd 55 a0 49 fe 08 59 d0 a1 16 69 60 8a 8e 54 d2
00000060: 02 6d ae 17 5f 32 bf 14 78 f0 86 47 26 bf fb 6b
00000070: 7c 17 f7 f5 62 b6 d6 a0 e5 f3 c2 af b5 28 ee d0
00000080: 9b 22 8c e6 d0 58 4d 48 18 6d dd 3e 4e 33 66 ac
00000090: a2 29 1f 3b 62 4a e6 4a 8c 98 18 8b 21 73 a5 88
000000A0: 49 09 3b 27 88 20 40 6b a5 fc 08 37 c7 ac c9 0f
000000B0: 5d 69 87 7c 37 c8 c7 fd d8 72 6d ad ac 22 27 ca
000000C0: 93 d6 bd 6a 55 2a 1a 8b 2e 84 b4 0a 35 d3 ac d5
000000D0: 99 c9 ac d5 6f 03 94 bf ca f5 53 e5 a5 74 57 de
000000E0: 6a 5a 26 b8 e4
```

(37) Computes ICV using K3r as K_msg

```
00000000: 04 2f 99 3f 02 19 56 c4 0d 0b 7a 45
```

(38)

Composes IV

000000000: 00 00 00 00 00 00 00 00 01

(39) Sends message, peer receives message

10.111.10.171:54294<-10.111.15.45:500 [281]

00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14
00000010: 2e 20 24 20 00 00 00 02 00 00 01 19 21 00 00 fd
00000020: 00 00 00 00 00 00 00 01 fd ee 4c 8f 78 ff b6 0c
00000030: fc 65 bb ef db 53 56 a2 d3 2d 4f 59 ff 28 38 eb
00000040: 76 0b 40 5e 8d 52 e8 c1 b9 75 22 b4 bb 71 8f 16
00000050: 3a 97 0e 4d 95 ef bc 84 46 c6 77 1e 4b 14 73 46
00000060: 89 ed d4 b4 54 a2 64 19 67 b2 98 7e 8b d4 45 31
00000070: 17 1e e4 ae f4 24 44 42 dd 55 a0 49 fe 08 59 d0
00000080: a1 16 69 60 8a 8e 54 d2 02 6d ae 17 5f 32 bf 14
00000090: 78 f0 86 47 26 bf fb 6b 7c 17 f7 f5 62 b6 d6 a0
000000A0: e5 f3 c2 af b5 28 ee d0 9b 22 8c e6 d0 58 4d 48
000000B0: 18 6d dd 3e 4e 33 66 ac a2 29 1f 3b 62 4a e6 4a
000000C0: 8c 98 18 8b 21 73 a5 88 49 09 3b 27 88 20 40 6b
000000D0: a5 fc 08 37 c7 ac c9 0f 5d 69 87 7c 37 c8 c7 fd
000000E0: d8 72 6d ad ac 22 27 ca 93 d6 bd 6a 55 2a 1a 8b
000000F0: 2e 84 b4 0a 35 d3 ac d5 99 c9 ac d5 6f 03 94 bf
00000100: ca f5 53 e5 a5 74 57 de 6a 5a 26 b8 e4 04 2f 99
00000110: 3f 02 19 56 c4 0d 0b 7a 45

Initiator's actions:

(40) Extracts IV from message

000000000: 00 00 00 00 00 00 00 00 01

(41) Uses previously computed key K3r

```
00000000: e8 af 72 c4 c3 55 a2 6a fb ad 37 fd b4 b9 7f d6  
00000010: f6 c8 cc 32 3f 50 32 40 06 86 ce 85 1b 02 28 f3
```

(42) Composes MGM nonce

```
00000000: 00 00 00 01 65 20 72 e7 0a 1e ff 7d da ba 17 31
```

(43) Extracts ICV from message

```
00000000: 04 2f 99 3f 02 19 56 c4 0d 0b 7a 45
```

(44) Extracts AAD from message

```
00000000: e9 d3 f3 78 19 1c 38 40 8d df f4 01 fb fb 0b 14  
00000010: 2e 20 24 20 00 00 00 02 00 00 01 19 21 00 00 fd
```

(45) Extracts ciphertext from message

```
00000000: fd ee 4c 8f 78 ff b6 0c fc 65 bb ef db 53 56 a2  
00000010: d3 2d 4f 59 ff 28 38 eb 76 0b 40 5e 8d 52 e8 c1  
00000020: b9 75 22 b4 bb 71 8f 16 3a 97 0e 4d 95 ef bc 84  
00000030: 46 c6 77 1e 4b 14 73 46 89 ed d4 b4 54 a2 64 19  
00000040: 67 b2 98 7e 8b d4 45 31 17 1e e4 ae f4 24 44 42  
00000050: dd 55 a0 49 fe 08 59 d0 a1 16 69 60 8a 8e 54 d2  
00000060: 02 6d ae 17 5f 32 bf 14 78 f0 86 47 26 bf fb 6b  
00000070: 7c 17 f7 f5 62 b6 d6 a0 e5 f3 c2 af b5 28 ee d0  
00000080: 9b 22 8c e6 d0 58 4d 48 18 6d dd 3e 4e 33 66 ac  
00000090: a2 29 1f 3b 62 4a e6 4a 8c 98 18 8b 21 73 a5 88  
000000A0: 49 09 3b 27 88 20 40 6b a5 fc 08 37 c7 ac c9 0f  
000000B0: 5d 69 87 7c 37 c8 c7 fd d8 72 6d ad ac 22 27 ca  
000000C0: 93 d6 bd 6a 55 2a 1a 8b 2e 84 b4 0a 35 d3 ac d5  
000000D0: 99 c9 ac d5 6f 03 94 bf ca f5 53 e5 a5 74 57 de  
000000E0: 6a 5a 26 b8 e4
```

- (46) Decrypts ciphertext and verifies ICV using K3r as K_msg, resulted in plaintext

```
00000000: 28 00 00 2c 00 00 00 28 01 01 08 03 82 d9 fa f8
00000010: 74 49 b9 36 03 00 00 08 01 00 00 20 03 00 00 08
00000020: 02 00 00 09 00 00 00 08 04 00 00 22 22 00 00 24
00000030: 5a 2d d2 68 c6 85 5d 32 d4 7b 0b 8e ae 7d c9 81
00000040: be 3e 69 c1 bb f5 ae 89 55 59 c7 48 bc 96 43 7b
00000050: 29 00 00 88 00 22 00 00 b9 f9 27 a8 96 70 7a 03
00000060: 58 c2 39 58 63 2d 50 20 bf 69 c0 1d a6 de d4 4d
00000070: 65 aa 26 c6 8f 9f e9 4b bb da 1d 2f d3 60 2d
00000080: 18 33 04 9b b2 25 a6 07 ac 58 1b fc 3c 5b 1e f3
00000090: 4b c0 f9 cb 90 14 c6 80 6e c3 73 c1 4a f7 5c 27
000000A0: dd 2a e1 ba 94 9c f7 06 68 92 19 8e 85 67 f9 d2
000000B0: d1 ea 3c 16 16 b9 3f 0c 8b 2d 2e d6 20 14 7e 27
000000C0: 18 d3 23 9e 2a 99 41 40 6a 41 c5 3f 79 9c a7 22
000000D0: 79 15 98 1d 98 b5 ac 4a 00 00 00 0c 00 00 40 01
000000E0: 00 00 00 40 00
```

- (47) Parses received message

```
Create Child SA
E9D3F378191C3840.8DDFF401FBFB0B14.00000002 IKEv2 R=>I[281]
E[253]{
    SA[44]{
        P[40](#1:IKE:82D9FAF87449B936:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            PRF=PRF_HMAC_STREEBOG_512,
            KE=GOST3410_2012_512} },
        NONCE[36]{5A2DD2...96437B},
        KE[136](GOST3410_2012_512){B9F927...B5AC4A},
        N[12](SET_WINDOW_SIZE){64}}
```

- (48) Computes shared key

```
000000000: dd e7 44 39 1c d9 66 cf d2 24 a4 bb 0a 57 b3 3e  
000000010: 1a 8f 5d 07 11 4d c3 47 87 1a 13 ec 84 26 03 f8  
000000020: ea 93 5a f5 23 a3 45 71 ff 5f f2 3d 59 43 3a 5e  
000000030: eb 5e 79 fa 0e 62 9e bc af ca e4 ee 7a 81 3a 84
```

(49) Computes SKEYSEED for new SA

```
000000000: ec 5f 4f 15 ce d7 7d 2f 12 fb a1 df 5f 44 aa 88  
000000010: 6a ef 45 e4 04 97 86 95 15 1b 3c ac 31 cc 57 a3  
000000020: f0 f4 92 89 33 00 76 2b e9 fd 8b c2 ed 8b e7 36  
000000030: cb 17 59 55 9e cc 22 14 72 a5 79 27 27 1d 06 62
```

(50) Computes SK_d for new SA

```
000000000: 08 58 14 7d eb c9 41 7f 7f a2 86 66 bf d4 76 37  
000000010: 04 27 4e bc 5d 63 f7 07 79 62 69 7a 69 3c da 7a  
000000020: d5 4d 6f 08 1e 14 51 66 2f 94 0d bd 29 45 9c b0  
000000030: 51 26 09 4b 47 52 ba 19 98 a5 c2 65 af 84 a1 34
```


(51) Computes SK_ei for new SA

```
000000000: 18 0a 4f 98 7d a4 21 6c 68 84 94 1f d9 28 49 b9  
000000010: 05 30 f8 aa 43 02 7e 0d aa d3 27 e9 8c 9a 39 9a  
000000020: 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca
```

(52) Computes SK_er for new SA

```
000000000: 47 dc aa 71 4a 8b 66 13 d8 09 79 c7 8c 72 0a 78  
000000010: 06 48 6d 4f 1f 53 3a 91 1d b7 2c 86 f5 f1 4e 00  
000000020: 84 57 87 2b 38 70 63 27 8c dd 88 78
```

Sub-scenario 3: ESP SAs rekeying with PFS using the CREATE_CHILD_SA exchange.

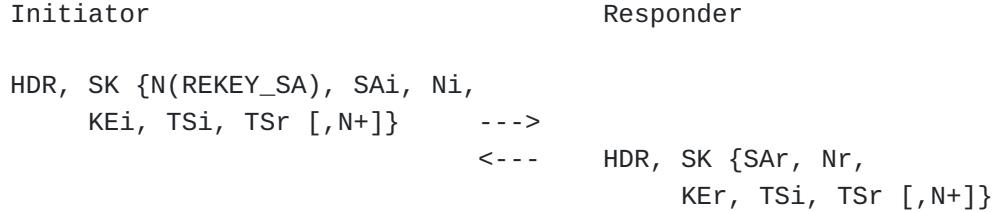

Initiator's actions:

- (1) Generates random IKE nonce Ni

```
00000000: 59 52 b2 58 00 b7 d3 f9 c3 31 23 16 6f c2 d1 d7  
00000010: 07 8b 99 fb 24 cf 24 30 a3 ce a6 fe d3 0f 20 9b
```

- (2) Generates ephemeral private key

```
00000000: 2f b9 df 43 dc 50 f5 17 59 c0 c7 21 ac ca 03 7a  
00000010: 55 87 f9 bb a6 5a 9e d4 46 98 15 c9 3a 6b 40 91  
00000020: e6 99 f4 f2 e5 88 14 e7 d8 9f 98 b1 59 21 05 52  
00000030: f0 b0 ce dc 8e c6 db 1f 9d a9 4a 6d 95 f2 cb 3d
```

- (3) Computes public key

```
00000000: 1c 55 08 b9 01 f5 76 6a 01 27 97 2d 38 b1 4a 5c  
00000010: b7 43 f1 64 24 ef 76 75 50 ce 4f 6f 59 ca 96 ae  
00000020: 54 85 9c 94 8d 04 91 62 3a 0c b6 6e 77 59 81 40  
00000030: 69 bf bb 80 f7 7c 29 ee 9f 9e 0c 83 b6 08 fc 43  
00000040: b8 c6 66 36 e5 eb a0 43 c2 56 fa 52 f9 99 b6 95  
00000050: 34 4c cd 49 1f c7 83 9e d7 d9 ca e3 a5 d0 3c aa  
00000060: e8 ee ed 2c dd 5c 81 49 ab 3c d4 fa 15 4e 29 5f  
00000070: 7c cd b2 f1 c1 d2 6f 8f a7 74 4d 6a d8 8a c3 60
```

(4) Selects SPI for new incoming ESP SA

000000000: a4 fe 65 a1

(5) Creates message

```
Create Child SA
4387648D6C9E28FF.82D9FAF87449B936.00000000 IKEv2 R<-I[341]
E[313]{
    N[12](ESP:0ADE5FCD:REKEY_SA),
    SA[40]{
        P[36](#1:ESP:A4FE65A1:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            KE=GOST3410_2012_512,
            ESN=0ff}},
        NONCE[36]{5952B2...0F209B},
        KE[136](GOST3410_2012_512){1C5508...8AC360},
        TSi[24](1#){10.1.1.2},
        TSr[24](1#){10.0.0.0-10.0.0.255},
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(6) Computes K1i ($i_1 = 0$)

00000000: 17 ec f1 84 33 9a c3 e3 93 e1 21 d7 65 3b 6c 83
00000010: d4 ae 9c 29 5b 12 cc b3 c5 0c 48 19 49 eb c0 ba

(7) Computes K2i ($i_2 = 0$)

00000000: 2d 33 c0 55 87 f2 ee ce ac 1a f2 28 64 c6 f5 ad
00000010: de 2d be 7a a8 92 d0 a6 20 bc ef 25 29 7b 56 9f

(8) Computes K3i ($i_3 = 0$)

```
000000000: c9 41 22 b5 39 b7 d2 3f c4 4d a6 ae 88 2e ff b4  
000000010: f4 c0 90 9c bd bc 63 56 14 62 e8 8f 90 1a e7 eb
```

(9) Composes MGM nonce

```
000000000: 00 00 00 00 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca
```

(10) Composes AAD

```
000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
000000010: 2e 20 24 08 00 00 00 00 00 00 01 55 29 00 01 39
```

(11) Composes plaintext

```
000000000: 21 00 00 0c 03 04 40 09 0a de 5f cd 28 00 00 28  
000000010: 00 00 00 24 01 03 04 03 a4 fe 65 a1 03 00 00 08  
000000020: 01 00 00 20 03 00 00 08 04 00 00 22 00 00 00 08  
000000030: 05 00 00 00 22 00 00 24 59 52 b2 58 00 b7 d3 f9  
000000040: c3 31 23 16 6f c2 d1 d7 07 8b 99 fb 24 cf 24 30  
000000050: a3 ce a6 fe d3 0f 20 9b 2c 00 00 88 00 22 00 00  
000000060: 1c 55 08 b9 01 f5 76 6a 01 27 97 2d 38 b1 4a 5c  
000000070: b7 43 f1 64 24 ef 76 75 50 ce 4f 6f 59 ca 96 ae  
000000080: 54 85 9c 94 8d 04 91 62 3a 0c b6 6e 77 59 81 40  
000000090: 69 bf bb 80 f7 7c 29 ee 9f 9e 0c 83 b6 08 fc 43  
0000000A0: b8 c6 66 36 e5 eb a0 43 c2 56 fa 52 f9 99 b6 95  
0000000B0: 34 4c cd 49 1f c7 83 9e d7 d9 ca e3 a5 d0 3c aa  
0000000C0: e8 ee ed 2c dd 5c 81 49 ab 3c d4 fa 15 4e 29 5f  
0000000D0: 7c cd b2 f1 c1 d2 6f 8f a7 74 4d 6a d8 8a c3 60  
0000000E0: 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff ff  
0000000F0: 0a 01 01 02 0a 01 01 02 29 00 00 18 01 00 00 00  
00000100: 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00 ff  
00000110: 29 00 00 08 00 00 40 0a 00 00 00 08 00 00 40 0b  
00000120: 00
```

(12)

Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext

```
00000000: 00 9b 13 cb cb f1 18 53 fc 81 2e 75 c3 03 e0 ca
00000010: 55 c1 fb 55 c0 29 40 48 fc 20 f4 a8 51 5b 97 6b
00000020: c6 07 4c 7d 45 54 51 0f 18 7f 43 a4 df 4b e8 e3
00000030: b4 eb 68 24 4b f0 1c df 8f 1e a2 21 31 02 29 68
00000040: 38 4d 68 fd 42 66 34 3e 82 46 f0 17 02 bf 65 19
00000050: b0 f7 09 62 0d 12 6a 7e ad 76 57 0d 19 55 cf 01
00000060: 89 9c 7e f5 5a fa 20 4f 8c 6d a4 83 b9 94 ad 4e
00000070: 2a 46 08 5a 58 a1 4b 8e 53 2b a4 e6 3b fc 33 de
00000080: cf cb ee 50 6d a1 9f e4 94 06 19 39 39 6b 7e 4b
00000090: 83 f7 07 c0 bb 15 21 8d 8f 2d 5f 6c f6 97 68 21
000000A0: 3c ce c6 67 82 00 8f f3 d7 d6 c3 f2 87 47 b8 b9
000000B0: a3 0f f8 e2 0a 62 e8 f5 98 df bc f0 02 6a 3f 47
000000C0: c4 f0 24 a4 80 95 bf cf 32 5a a5 22 3c a5 a8 f1
000000D0: 57 d6 3b b8 06 1c b6 d7 c7 b3 58 e7 ee 69 eb 31
000000E0: d6 09 db 8b 8a 1d 2b a1 f7 46 e5 b9 99 13 73 30
000000F0: 1f ed 0c 82 4b cc ce 5e 25 79 1b ff 8b ca f0 b2
00000100: 1e 7e 70 03 66 c7 7b 6c 10 92 f2 34 b6 e9 ce bb
00000110: 65 ce d4 b5 99 f3 70 78 5f 06 f4 fe 0a 3c 00 28
00000120: 68
```

(13) Computes ICV using K_{3i} as K_{msg}

```
00000000: fc 85 a4 7e 0b 41 77 54 ef 1a 03 cb
```

(14) Composes IV

```
00000000: 00 00 00 00 00 00 00 00
```

(15) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [341]

```
00000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
00000010: 2e 20 24 08 00 00 00 00 00 00 01 55 29 00 01 39
00000020: 00 00 00 00 00 00 00 00 00 00 9b 13 cb cb f1 18 53
00000030: fc 81 2e 75 c3 03 e0 ca 55 c1 fb 55 c0 29 40 48
00000040: fc 20 f4 a8 51 5b 97 6b c6 07 4c 7d 45 54 51 0f
00000050: 18 7f 43 a4 df 4b e8 e3 b4 eb 68 24 4b f0 1c df
00000060: 8f 1e a2 21 31 02 29 68 38 4d 68 fd 42 66 34 3e
00000070: 82 46 f0 17 02 bf 65 19 b0 f7 09 62 0d 12 6a 7e
00000080: ad 76 57 0d 19 55 cf 01 89 9c 7e f5 5a fa 20 4f
00000090: 8c 6d a4 83 b9 94 ad 4e 2a 46 08 5a 58 a1 4b 8e
000000A0: 53 2b a4 e6 3b fc 33 de cf cb ee 50 6d a1 9f e4
000000B0: 94 06 19 39 39 6b 7e 4b 83 f7 07 c0 bb 15 21 8d
000000C0: 8f 2d 5f 6c f6 97 68 21 3c ce c6 67 82 00 8f f3
000000D0: d7 d6 c3 f2 87 47 b8 b9 a3 0f f8 e2 0a 62 e8 f5
000000E0: 98 df bc f0 02 6a 3f 47 c4 f0 24 a4 80 95 bf cf
000000F0: 32 5a a5 22 3c a5 a8 f1 57 d6 3b b8 06 1c b6 d7
00000100: c7 b3 58 e7 ee 69 eb 31 d6 09 db 8b 8a 1d 2b a1
00000110: f7 46 e5 b9 99 13 73 30 1f ed 0c 82 4b cc ce 5e
00000120: 25 79 1b ff 8b ca f0 b2 1e 7e 70 03 66 c7 7b 6c
00000130: 10 92 f2 34 b6 e9 ce bb 65 ce d4 b5 99 f3 70 78
00000140: 5f 06 f4 fe 0a 3c 00 28 68 fc 85 a4 7e 0b 41 77
00000150: 54 ef 1a 03 cb
```

Responder's actions:

(16) Extracts IV from message

```
00000000: 00 00 00 00 00 00 00 00
```

(17) Computes K1i (i1 = 0)

```
00000000: 17 ec f1 84 33 9a c3 e3 93 e1 21 d7 65 3b 6c 83
00000010: d4 ae 9c 29 5b 12 cc b3 c5 0c 48 19 49 eb c0 ba
```

(18) Computes K2i (i2 = 0)

```
000000000: 2d 33 c0 55 87 f2 ee ce ac 1a f2 28 64 c6 f5 ad  
000000010: de 2d be 7a a8 92 d0 a6 20 bc ef 25 29 7b 56 9f
```

(19) Computes K3i (i3 = 0)

```
000000000: c9 41 22 b5 39 b7 d2 3f c4 4d a6 ae 88 2e ff b4  
000000010: f4 c0 90 9c bd bc 63 56 14 62 e8 8f 90 1a e7 eb
```

(20) Composes MGM nonce

```
000000000: 00 00 00 00 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca
```

(21) Extracts ICV from message

```
000000000: fc 85 a4 7e 0b 41 77 54 ef 1a 03 cb
```

(22) Extracts AAD from message

```
000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
000000010: 2e 20 24 08 00 00 00 00 00 01 55 29 00 01 39
```

(23) Extracts ciphertext from message

```
00000000: 00 9b 13 cb cb f1 18 53 fc 81 2e 75 c3 03 e0 ca
00000010: 55 c1 fb 55 c0 29 40 48 fc 20 f4 a8 51 5b 97 6b
00000020: c6 07 4c 7d 45 54 51 0f 18 7f 43 a4 df 4b e8 e3
00000030: b4 eb 68 24 4b f0 1c df 8f 1e a2 21 31 02 29 68
00000040: 38 4d 68 fd 42 66 34 3e 82 46 f0 17 02 bf 65 19
00000050: b0 f7 09 62 0d 12 6a 7e ad 76 57 0d 19 55 cf 01
00000060: 89 9c 7e f5 5a fa 20 4f 8c 6d a4 83 b9 94 ad 4e
00000070: 2a 46 08 5a 58 a1 4b 8e 53 2b a4 e6 3b fc 33 de
00000080: cf cb ee 50 6d a1 9f e4 94 06 19 39 39 6b 7e 4b
00000090: 83 f7 07 c0 bb 15 21 8d 8f 2d 5f 6c f6 97 68 21
000000A0: 3c ce c6 67 82 00 8f f3 d7 d6 c3 f2 87 47 b8 b9
000000B0: a3 0f f8 e2 0a 62 e8 f5 98 df bc f0 02 6a 3f 47
000000C0: c4 f0 24 a4 80 95 bf cf 32 5a a5 22 3c a5 a8 f1
000000D0: 57 d6 3b b8 06 1c b6 d7 c7 b3 58 e7 ee 69 eb 31
000000E0: d6 09 db 8b 8a 1d 2b a1 f7 46 e5 b9 99 13 73 30
000000F0: 1f ed 0c 82 4b cc ce 5e 25 79 1b ff 8b ca f0 b2
00000100: 1e 7e 70 03 66 c7 7b 6c 10 92 f2 34 b6 e9 ce bb
00000110: 65 ce d4 b5 99 f3 70 78 5f 06 f4 fe 0a 3c 00 28
00000120: 68
```

- (24) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext

```
00000000: 21 00 00 0c 03 04 40 09 0a de 5f cd 28 00 00 28
00000010: 00 00 00 24 01 03 04 03 a4 fe 65 a1 03 00 00 08
00000020: 01 00 00 20 03 00 00 08 04 00 00 22 00 00 00 08
00000030: 05 00 00 00 22 00 00 24 59 52 b2 58 00 b7 d3 f9
00000040: c3 31 23 16 6f c2 d1 d7 07 8b 99 fb 24 cf 24 30
00000050: a3 ce a6 fe d3 0f 20 9b 2c 00 00 88 00 22 00 00
00000060: 1c 55 08 b9 01 f5 76 6a 01 27 97 2d 38 b1 4a 5c
00000070: b7 43 f1 64 24 ef 76 75 50 ce 4f 6f 59 ca 96 ae
00000080: 54 85 9c 94 8d 04 91 62 3a 0c b6 6e 77 59 81 40
00000090: 69 bf bb 80 f7 7c 29 ee 9f 9e 0c 83 b6 08 fc 43
000000A0: b8 c6 66 36 e5 eb a0 43 c2 56 fa 52 f9 99 b6 95
000000B0: 34 4c cd 49 1f c7 83 9e d7 d9 ca e3 a5 d0 3c aa
000000C0: e8 ee ed 2c dd 5c 81 49 ab 3c d4 fa 15 4e 29 5f
000000D0: 7c cd b2 f1 c1 d2 6f 8f a7 74 4d 6a d8 8a c3 60
000000E0: 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff ff
000000F0: 0a 01 01 02 0a 01 01 02 29 00 00 18 01 00 00 00
00000100: 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00 ff
00000110: 29 00 00 08 00 00 40 0a 00 00 00 08 00 00 40 0b
00000120: 00
```

(25)

Parses received message

```
Create Child SA
4387648D6C9E28FF.82D9FAF87449B936.00000000 IKEv2 I->R[341]
E[313]{
    N[12](ESP:0ADE5FCD:REKEY_SA),
    SA[40]{
        P[36](#1:ESP:A4FE65A1:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            KE=GOST3410_2012_512,
            ESN=Off},
        NONCE[36]{5952B2...0F209B},
        KE[136](GOST3410_2012_512){1C5508...8AC360},
        TSi[24](1#){10.1.1.2},
        TSR[24](1#){10.0.0.0-10.0.0.255},
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(26) Generates random IKE nonce Nr

```
00000000: f1 c1 3f 5e c4 c9 70 81 cb 1f 57 fe af 3d 80 37
00000010: 92 a9 ff 96 db 8f 3f 31 0a db 84 d1 24 d5 94 12
```

(27) Generates ephemeral private key

```
00000000: 2e 75 2f 5d 6c f0 9a 59 af 47 8d e1 2a a5 aa f5
00000010: c1 ef 9a fb e0 16 5e d9 59 6a c5 96 e8 88 14 62
00000020: 03 81 90 4f 18 d1 60 18 fe dc 9a a1 61 b3 8b c0
00000030: bf e0 d9 a0 d5 2b f2 7b 6b 60 f5 b9 4d e9 0b 36
```

(28) Computes public key

```
00000000: de 1d 91 64 c3 3e 58 4a b3 3e 55 5d 3e f6 5b cb  
00000010: b5 c6 1c 09 cb 9a 17 91 81 13 5f 46 ce 52 98 c5  
00000020: 1e bb 77 96 c9 04 03 2d f4 e5 23 f9 75 e3 ef a8  
00000030: 53 52 b4 75 9c 00 55 7b 09 75 49 55 c1 65 7c 4d  
00000040: 67 77 00 0a bc cd bc 4c 34 c3 b3 85 ed 86 7d 3b  
00000050: 9f f7 15 ea 55 b5 e4 1e 45 d9 b0 4f 69 3f ee 7c  
00000060: 89 0e 09 3d 4b 35 2e 8a 3c 0c 33 20 c3 54 7b 44  
00000070: db 9f c7 96 a0 1e 9e ae b4 bd 29 73 b6 80 2d 00
```

(29) Selects SPI for new incoming ESP SA

```
00000000: 29 0a 8e 3f
```

(30) Computes keys for new ESP SAs

```
00000000: 4e c4 99 c2 d9 e8 fc 7f 26 fa cf df 20 8f a2 5c  
00000010: 85 f8 e3 0c f7 fd 11 5b 5f 80 ba c4 e6 70 8b e4  
00000020: 0b 90 d7 8f bd d4 c5 bd c4 31 6f 0b  
00000000: 3c cc d8 46 72 44 68 c6 41 84 d2 22 ea 39 7c e8  
00000010: aa 83 66 11 3a 26 4d 7b 07 52 6b c7 65 25 73 9d  
00000020: 0f 3d 80 bc 8c 34 ff 07 31 11 5e d2
```

(31) Creates message

```

Create Child SA
4387648D6C9E28FF.82D9FAF87449B936.00000000 IKEv2 I<=R[337]
E[309]{
    SA[40]{
        P[36](#1:ESP:290A8E3F:3#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            KE=GOST3410_2012_512,
            ESN=Off},
        NONCE[36]{F1C13F...D59412},
        KE[136](GOST3410_2012_512){DE1D91...802D00},
        TSi[24](1#){10.1.1.2},
        TSr[24](1#){10.0.0.0-10.0.0.255},
        N[8](ADDITIONAL_TS_POSSIBLE),
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
}

```

(32) Computes K1r (i1 = 0)

```

00000000: 0c 45 d2 29 64 b8 72 57 11 10 3b a0 c2 66 d8 63
00000010: 34 f5 22 43 bf 6b 9a 1b 67 d6 d2 d8 fc 87 75 38

```

(33) Computes K2r (i2 = 0)

```

00000000: a9 92 d9 92 1f 15 13 bd db 61 83 43 58 2d dd e6
00000010: 66 28 4f 5d 71 47 a9 d4 8e 31 2e 95 37 f8 c5 d2

```

(34) Computes K3r (i3 = 0)

```

00000000: c1 ca 4f dd 2d 02 55 a4 11 9a 10 08 43 2d 61 ea
00000010: 52 68 83 c5 ec 92 53 24 01 b0 a2 0b d2 8f 72 78

```

(35) Composes MGM nonce

```
000000000: 00 00 00 00 84 57 87 2b 38 70 63 27 8c dd 88 78
```

(36) Composes AAD

```
000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
00000010: 2e 20 24 20 00 00 00 00 00 00 01 51 21 00 01 35
```

(37) Composes plaintext

```
000000000: 28 00 00 28 00 00 00 24 01 03 04 03 29 0a 8e 3f  
00000010: 03 00 00 08 01 00 00 20 03 00 00 08 04 00 00 22  
00000020: 00 00 00 08 05 00 00 00 22 00 00 24 f1 c1 3f 5e  
00000030: c4 c9 70 81 cb 1f 57 fe af 3d 80 37 92 a9 ff 96  
00000040: db 8f 3f 31 0a db 84 d1 24 d5 94 12 2c 00 00 88  
00000050: 00 22 00 00 de 1d 91 64 c3 3e 58 4a b3 3e 55 5d  
00000060: 3e f6 5b cb b5 c6 1c 09 cb 9a 17 91 81 13 5f 46  
00000070: ce 52 98 c5 1e bb 77 96 c9 04 03 2d f4 e5 23 f9  
00000080: 75 e3 ef a8 53 52 b4 75 9c 00 55 7b 09 75 49 55  
00000090: c1 65 7c 4d 67 77 00 0a bc cd bc 4c 34 c3 b3 85  
000000A0: ed 86 7d 3b 9f f7 15 ea 55 b5 e4 1e 45 d9 b0 4f  
000000B0: 69 3f ee 7c 89 0e 09 3d 4b 35 2e 8a 3c 0c 33 20  
000000C0: c3 54 7b 44 db 9f c7 96 a0 1e 9e ae b4 bd 29 73  
000000D0: b6 80 2d 00 2d 00 00 18 01 00 00 00 07 00 00 10  
000000E0: 00 00 ff ff 0a 01 01 02 0a 01 01 02 29 00 00 18  
000000F0: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 00 00 00  
00000100: 0a 00 00 ff 29 00 00 08 00 00 40 02 29 00 00 08  
00000110: 00 00 40 0a 00 00 00 08 00 00 40 0b 00
```

(38) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

```
00000000: 42 73 5f 2b 14 a0 27 ca 3c 90 67 80 3c 3d 99 02
00000010: 1c 08 c8 67 03 0f 69 f1 c3 64 43 a6 59 74 ce b0
00000020: d7 5d 29 58 53 3a f6 c3 20 04 56 ba 2e af 14 9b
00000030: 2d a3 93 15 2c e5 15 e6 59 2b 7f 47 94 7f 90 82
00000040: ce d3 64 cc 89 92 04 c6 bc 7b ce 61 c6 1d 7f a5
00000050: 45 1c 27 e6 0b 78 1a f2 75 8f 3e 47 53 8e d7 16
00000060: 11 f4 26 04 ae 5e d5 b8 84 b6 ac e6 20 28 da ca
00000070: da 84 fe 0d c4 4d 29 2f 58 30 fe 93 f6 59 04 4a
00000080: 9b aa 97 99 5b 5e 74 9c 5d 45 d5 99 42 16 8c ab
00000090: 62 cb 9f 14 5f f5 25 92 34 5c 8d 61 45 44 55 6d
000000A0: 3d 80 b0 39 f0 39 0b 43 8a f9 b7 b7 17 41 34 ce
000000B0: 36 bf e3 e7 1a 68 61 72 0e f1 91 24 89 ab d7 e9
000000C0: a9 b1 87 38 a1 c0 4c 42 4e 47 62 28 9e d7 1f 02
000000D0: 13 40 69 38 31 f1 91 87 ec 54 11 0a 2d d9 25 15
000000E0: 15 16 37 b7 71 94 11 49 5e f7 28 90 c5 1e 6b 07
000000F0: d9 cf 06 a2 a2 33 0e e0 25 67 db a6 17 11 27 60
00000100: c8 21 f7 79 63 aa b0 f9 7b 95 03 a7 8d 2e d7 df
00000110: 58 e7 30 ab d3 c8 f1 24 40 69 fc 3f bf
```

(39) Computes ICV using K3r as K_msg

```
00000000: 3a 2d 3c 6b 87 43 ed 6e 80 ab 27 e2
```

(40) Composes IV

```
00000000: 00 00 00 00 00 00 00 00
```

(41) Sends message, peer receives message

10.111.10.171:54294<-10.111.15.45:500 [337]

```
00000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
00000010: 2e 20 24 20 00 00 00 00 00 00 01 51 21 00 01 35
00000020: 00 00 00 00 00 00 00 00 42 73 5f 2b 14 a0 27 ca
00000030: 3c 90 67 80 3c 3d 99 02 1c 08 c8 67 03 0f 69 f1
00000040: c3 64 43 a6 59 74 ce b0 d7 5d 29 58 53 3a f6 c3
00000050: 20 04 56 ba 2e af 14 9b 2d a3 93 15 2c e5 15 e6
00000060: 59 2b 7f 47 94 7f 90 82 ce d3 64 cc 89 92 04 c6
00000070: bc 7b ce 61 c6 1d 7f a5 45 1c 27 e6 0b 78 1a f2
00000080: 75 8f 3e 47 53 8e d7 16 11 f4 26 04 ae 5e d5 b8
00000090: 84 b6 ac e6 20 28 da ca da 84 fe 0d c4 4d 29 2f
000000A0: 58 30 fe 93 f6 59 04 4a 9b aa 97 99 5b 5e 74 9c
000000B0: 5d 45 d5 99 42 16 8c ab 62 cb 9f 14 5f f5 25 92
000000C0: 34 5c 8d 61 45 44 55 6d 3d 80 b0 39 f0 39 0b 43
000000D0: 8a f9 b7 b7 17 41 34 ce 36 bf e3 e7 1a 68 61 72
000000E0: 0e f1 91 24 89 ab d7 e9 a9 b1 87 38 a1 c0 4c 42
000000F0: 4e 47 62 28 9e d7 1f 02 13 40 69 38 31 f1 91 87
00000100: ec 54 11 0a 2d d9 25 15 15 16 37 b7 71 94 11 49
00000110: 5e f7 28 90 c5 1e 6b 07 d9 cf 06 a2 a2 33 0e e0
00000120: 25 67 db a6 17 11 27 60 c8 21 f7 79 63 aa b0 f9
00000130: 7b 95 03 a7 8d 2e d7 df 58 e7 30 ab d3 c8 f1 24
00000140: 40 69 fc 3f bf 3a 2d 3c 6b 87 43 ed 6e 80 ab 27
00000150: e2
```

Initiator's actions:

(42) Extracts IV from message

```
00000000: 00 00 00 00 00 00 00 00
```

(43) Computes K1r (i1 = 0)

```
00000000: 0c 45 d2 29 64 b8 72 57 11 10 3b a0 c2 66 d8 63
00000010: 34 f5 22 43 bf 6b 9a 1b 67 d6 d2 d8 fc 87 75 38
```

(44) Computes K2r (i2 = 0)

```
000000000: a9 92 d9 92 1f 15 13 bd db 61 83 43 58 2d dd e6  
000000010: 66 28 4f 5d 71 47 a9 d4 8e 31 2e 95 37 f8 c5 d2
```

(45) Computes K3r (i3 = 0)

```
000000000: c1 ca 4f dd 2d 02 55 a4 11 9a 10 08 43 2d 61 ea  
000000010: 52 68 83 c5 ec 92 53 24 01 b0 a2 0b d2 8f 72 78
```

(46) Composes MGM nonce

```
000000000: 00 00 00 00 84 57 87 2b 38 70 63 27 8c dd 88 78
```

(47) Extracts ICV from message

```
000000000: 3a 2d 3c 6b 87 43 ed 6e 80 ab 27 e2
```

(48) Extracts AAD from message

```
000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
000000010: 2e 20 24 20 00 00 00 00 00 00 01 51 21 00 01 35
```

(49) Extracts ciphertext from message

```
00000000: 42 73 5f 2b 14 a0 27 ca 3c 90 67 80 3c 3d 99 02
00000010: 1c 08 c8 67 03 0f 69 f1 c3 64 43 a6 59 74 ce b0
00000020: d7 5d 29 58 53 3a f6 c3 20 04 56 ba 2e af 14 9b
00000030: 2d a3 93 15 2c e5 15 e6 59 2b 7f 47 94 7f 90 82
00000040: ce d3 64 cc 89 92 04 c6 bc 7b ce 61 c6 1d 7f a5
00000050: 45 1c 27 e6 0b 78 1a f2 75 8f 3e 47 53 8e d7 16
00000060: 11 f4 26 04 ae 5e d5 b8 84 b6 ac e6 20 28 da ca
00000070: da 84 fe 0d c4 4d 29 2f 58 30 fe 93 f6 59 04 4a
00000080: 9b aa 97 99 5b 5e 74 9c 5d 45 d5 99 42 16 8c ab
00000090: 62 cb 9f 14 5f f5 25 92 34 5c 8d 61 45 44 55 6d
000000A0: 3d 80 b0 39 f0 39 0b 43 8a f9 b7 b7 17 41 34 ce
000000B0: 36 bf e3 e7 1a 68 61 72 0e f1 91 24 89 ab d7 e9
000000C0: a9 b1 87 38 a1 c0 4c 42 4e 47 62 28 9e d7 1f 02
000000D0: 13 40 69 38 31 f1 91 87 ec 54 11 0a 2d d9 25 15
000000E0: 15 16 37 b7 71 94 11 49 5e f7 28 90 c5 1e 6b 07
000000F0: d9 cf 06 a2 a2 33 0e e0 25 67 db a6 17 11 27 60
00000100: c8 21 f7 79 63 aa b0 f9 7b 95 03 a7 8d 2e d7 df
00000110: 58 e7 30 ab d3 c8 f1 24 40 69 fc 3f bf
```

- (50) Decrypts ciphertext and verifies ICV using K3r as K_msg, resulted in plaintext

```
00000000: 28 00 00 28 00 00 00 24 01 03 04 03 29 0a 8e 3f
00000010: 03 00 00 08 01 00 00 20 03 00 00 08 04 00 00 22
00000020: 00 00 00 08 05 00 00 00 22 00 00 24 f1 c1 3f 5e
00000030: c4 c9 70 81 cb 1f 57 fe af 3d 80 37 92 a9 ff 96
00000040: db 8f 3f 31 0a db 84 d1 24 d5 94 12 2c 00 00 88
00000050: 00 22 00 00 de 1d 91 64 c3 3e 58 4a b3 3e 55 5d
00000060: 3e f6 5b cb b5 c6 1c 09 cb 9a 17 91 81 13 5f 46
00000070: ce 52 98 c5 1e bb 77 96 c9 04 03 2d f4 e5 23 f9
00000080: 75 e3 ef a8 53 52 b4 75 9c 00 55 7b 09 75 49 55
00000090: c1 65 7c 4d 67 77 00 0a bc cd bc 4c 34 c3 b3 85
000000A0: ed 86 7d 3b 9f f7 15 ea 55 b5 e4 1e 45 d9 b0 4f
000000B0: 69 3f ee 7c 89 0e 09 3d 4b 35 2e 8a 3c 0c 33 20
000000C0: c3 54 7b 44 db 9f c7 96 a0 1e 9e ae b4 bd 29 73
000000D0: b6 80 2d 00 2d 00 00 18 01 00 00 00 07 00 00 10
000000E0: 00 00 ff ff 0a 01 01 02 0a 01 01 02 29 00 00 18
000000F0: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 00 00 00
00000100: 0a 00 00 ff 29 00 00 08 00 00 40 02 29 00 00 08
00000110: 00 00 40 0a 00 00 00 08 00 00 40 0b 00
```

- (51) Parses received message

```

Create Child SA
4387648D6C9E28FF.82D9FAF87449B936.00000000 IKEv2 R=>I[337]
E[309]{
  SA[40]{
    P[36](#1:ESP:290A8E3F:3#){
      Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
      KE=GOST3410_2012_512,
      ESN=Off},
    NONCE[36]{F1C13F...D59412},
    KE[136](GOST3410_2012_512){DE1D91...802D00},
    TSi[24](1#){10.1.1.2},
    TSr[24](1#){10.0.0.0-10.0.0.255},
    N[8](ADDITIONAL_TS_POSSIBLE),
    N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
    N[8](NON_FIRST_FRAGMENTS_ALSO)}
  }
}

```

(52) Computes keys for new ESP SAs

```

00000000: 4e c4 99 c2 d9 e8 fc 7f 26 fa cf df 20 8f a2 5c
00000010: 85 f8 e3 0c f7 fd 11 5b 5f 80 ba c4 e6 70 8b e4
00000020: 0b 90 d7 8f bd d4 c5 bd c4 31 6f 0b
00000000: 3c cc d8 46 72 44 68 c6 41 84 d2 22 ea 39 7c e8
00000010: aa 83 66 11 3a 26 4d 7b 07 52 6b c7 65 25 73 9d
00000020: 0f 3d 80 bc 8c 34 ff 07 31 11 5e d2

```

Sub-scenario 4: IKE SA deletion using the INFORMATIONAL exchange.



Initiator's actions:

(1) Creates message

```
Informational  
4387648D6C9E28FF.82D9FAF87449B936.00000003 IKEv2 R<-I[61]  
E[33]{  
    D[8](IKE)}
```

- (2) Uses previously computed key K3i

```
00000000: c9 41 22 b5 39 b7 d2 3f c4 4d a6 ae 88 2e ff b4  
00000010: f4 c0 90 9c bd bc 63 56 14 62 e8 8f 90 1a e7 eb
```

- (3) Composes MGM nonce

```
00000000: 00 00 00 03 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca
```

- (4) Composes AAD

```
00000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
00000010: 2e 20 25 08 00 00 00 03 00 00 00 3d 2a 00 00 21
```

- (5) Composes plaintext

```
00000000: 00 00 00 08 01 00 00 00 00
```

- (6) Encrypts plaintext using K3i as K_msg, resulted in ciphertext

```
00000000: 3e 17 6f 6c 23 48 06 e9 fd
```

(7)

Computes ICV using K_{3i} as K_{msg}

000000000: 23 7b a2 fc d5 1c 6f 2c c0 1e 21 e4

(8) Composes IV

000000000: 00 00 00 00 00 00 00 00 03

(9) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [61]

000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
00000010: 2e 20 25 08 00 00 00 03 00 00 00 00 3d 2a 00 00 21
00000020: 00 00 00 00 00 00 00 03 3e 17 6f 6c 23 48 06 e9
00000030: fd 23 7b a2 fc d5 1c 6f 2c c0 1e 21 e4

Responder's actions:

(10) Extracts IV from message

000000000: 00 00 00 00 00 00 00 00 03

(11) Uses previously computed key K_{3i}

000000000: c9 41 22 b5 39 b7 d2 3f c4 4d a6 ae 88 2e ff b4
00000010: f4 c0 90 9c bd bc 63 56 14 62 e8 8f 90 1a e7 eb

(12) Composes MGM nonce

000000000: 00 00 00 03 03 a0 05 b7 b2 2d f9 90 bb 6c ff ca

(13) Extracts ICV from message

000000000: 23 7b a2 fc d5 1c 6f 2c c0 1e 21 e4

(14) Extracts AAD from message

000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
000000010: 2e 20 25 08 00 00 00 03 00 00 00 3d 2a 00 00 21

(15) Extracts ciphertext from message

000000000: 3e 17 6f 6c 23 48 06 e9 fd

(16) Decrypts ciphertext and verifies ICV using K3i as K_msg,
resulted in plaintext

000000000: 00 00 00 08 01 00 00 00 00

(17) Parses received message

Informational
4387648D6C9E28FF.82D9FAF87449B936.00000003 IKEv2 I->R[61]
E[33]{
D[8](IKE)}

(18)

Creates message

Informational

4387648D6C9E28FF.82D9FAF87449B936.00000003 IKEv2 I<=R[53]
E[25]{}

(19) Uses previously computed key K3r

00000000: c1 ca 4f dd 2d 02 55 a4 11 9a 10 08 43 2d 61 ea
00000010: 52 68 83 c5 ec 92 53 24 01 b0 a2 0b d2 8f 72 78

(20) Composes MGM nonce

00000000: 00 00 00 03 84 57 87 2b 38 70 63 27 8c dd 88 78

(21) Composes AAD

00000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
00000010: 2e 20 25 20 00 00 00 03 00 00 00 35 00 00 00 19

(22) Composes plaintext

00000000: 00

(23) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

00000000: f1

(24) Computes ICV using K3r as K_msg

```
000000000: 38 3b 47 ed 04 4d af 44 b8 59 9a ce
```

(25) Composes IV

```
000000000: 00 00 00 00 00 00 00 00 03
```

(26) Sends message, peer receives message

```
10.111.10.171:54294<-10.111.15.45:500 [53]
```

```
000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36  
00000010: 2e 20 25 20 00 00 00 03 00 00 00 00 35 00 00 00 19  
00000020: 00 00 00 00 00 00 00 03 f1 38 3b 47 ed 04 4d af  
00000030: 44 b8 59 9a ce
```

Initiator's actions:

(27) Extracts IV from message

```
000000000: 00 00 00 00 00 00 00 00 03
```

(28) Uses previously computed key K3r

```
000000000: c1 ca 4f dd 2d 02 55 a4 11 9a 10 08 43 2d 61 ea  
00000010: 52 68 83 c5 ec 92 53 24 01 b0 a2 0b d2 8f 72 78
```

(29) Composes MGM nonce

000000000: 00 00 00 03 84 57 87 2b 38 70 63 27 8c dd 88 78

(30) Extracts ICV from message

000000000: 38 3b 47 ed 04 4d af 44 b8 59 9a ce

(31) Extracts AAD from message

000000000: 43 87 64 8d 6c 9e 28 ff 82 d9 fa f8 74 49 b9 36
000000010: 2e 20 25 20 00 00 00 03 00 00 00 35 00 00 00 19

(32) Extracts ciphertext from message

000000000: f1

(33) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext

000000000: 00

(34) Parses received message

Informational
4387648D6C9E28FF.82D9FAF87449B936.00000003 IKEv2 R=>I[53]
E[25]{}

A.2. Scenario 2

With this scenario peers establish, rekey and delete IKE SA and ESP SAs using the following prerequisites:

*Peers authenticate each other using digital signatures

*Initiator's ID is "CN=IKE Interop Test Client, O=ELVIS-PLUS, C=RU" of type ID_DER_ASN1_DN:

```
00000010: 30 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45  
00000020: 20 49 6e 74 65 72 6f 70 20 54 65 73 74 20 43 6c  
00000030: 69 65 6e 74 31 13 30 11 06 03 55 04 0a 13 0a 45  
00000040: 4c 56 49 53 2d 50 4c 55 53 31 0b 30 09 06 03 55  
00000050: 04 06 13 02 52 55
```

*Responder's ID is "CN=IKE Interop Test Server, O=ELVIS-PLUS, C=RU" of type ID_DER_ASN1_DN:

```
00000010: 30 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45  
00000020: 20 49 6e 74 65 72 6f 70 20 54 65 73 74 20 53 65  
00000030: 72 76 65 72 31 13 30 11 06 03 55 04 0a 13 0a 45  
00000040: 4c 56 49 53 2d 50 4c 55 53 31 0b 30 09 06 03 55  
00000050: 04 06 13 02 52 55
```

*No NAT is present between the peers, but using UDP encapsulation is forced by the initiator by setting NAT_DETECTION_SOURCE_IP notify to all zeroes

*IKE fragmentation is used in the IKE_AUTH exchange

*IKE SA is created with the following transforms:

-ENCR_MAGMA_MGM_KTREE

-PRF_HMAC_STREEBOG_512

-GOST3410_2012_256

*ESP SAs are created with the following transforms:

-ENCR_MAGMA_MGM_KTREE

-ESN off

The certificates for this scenario were obtained from the public testing CA service <https://testgost2012.cryptopro.ru/certsrv/>

The initiator's certificate private key (little endian):

```
000000000000: 76 e9 dd b3 f3 a2 08 a2 4e a5 81 9c ae 41 da b4  
00000000010: 77 3c 1d d5 dc eb af e6 58 b1 47 d2 d8 29 ce 71  
00000000020: 18 a9 85 5d 28 5b 3c e3 23 bd 80 ac 2f 00 cc b6  
00000000030: 61 4c 42 a1 65 61 02 cf 33 eb 1f 5f 02 ce 8a b9
```

The initiator's certificate:

00000000000: 30 82 04 f7 30 82 04 a4 a0 03 02 01 02 02 13 7c
0000000010: 00 03 da a8 9e 1e ff 9e 79 05 fb bb 00 01 00 03
0000000020: da a8 30 0a 06 08 2a 85 03 07 01 01 03 02 30 82
0000000030: 01 0a 31 18 30 16 06 05 2a 85 03 64 01 12 0d 31
0000000040: 32 33 34 35 36 37 38 39 30 31 32 33 31 1a 30 18
0000000050: 06 08 2a 85 03 03 81 03 01 01 12 0c 30 30 31 32
0000000060: 33 34 35 36 37 38 39 30 31 2f 30 2d 06 03 55 04
0000000070: 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83 d1 89 d1
0000000080: 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0 b2 d0 b0
0000000090: d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09 06 03 55
00000000A0: 04 06 13 02 52 55 31 19 30 17 06 03 55 04 08 0c
00000000B0: 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba d0 b2 d0
00000000C0: b0 31 15 30 13 06 03 55 04 07 0c 0c d0 9c d0 be
00000000D0: d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06 03 55 04
00000000E0: 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000000F0: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 31
0000000100: 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0 b5 d1 81
0000000110: d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3 d0 a6 20
0000000120: d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0 98 d0 9f
0000000130: d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30 1e 17 0d
0000000140: 32 31 31 30 30 31 30 36 31 30 31 30 5a 17 0d 32
0000000150: 32 30 31 30 31 30 36 32 30 31 30 5a 30 44 31 20
0000000160: 30 1e 06 03 55 04 03 13 17 49 4b 45 20 49 6e 74
0000000170: 65 72 6f 70 20 54 65 73 74 20 43 6c 69 65 6e 74
0000000180: 31 13 30 11 06 03 55 04 0a 13 0a 45 4c 56 49 53
0000000190: 2d 50 4c 55 53 31 0b 30 09 06 03 55 04 06 13 02
00000001A0: 52 55 30 81 aa 30 21 06 08 2a 85 03 07 01 01 01
00000001B0: 02 30 15 06 09 2a 85 03 07 01 02 01 02 01 06 08
00000001C0: 2a 85 03 07 01 01 02 03 03 81 84 00 04 81 80 ee
00000001D0: 2f 0a 0e 09 1e 7e 04 ef ba 5b 62 a2 52 86 e1 9c
00000001E0: 24 50 30 50 b0 b4 8a 37 35 b5 fc af 28 94 ec b5
00000001F0: 9b 92 41 5b 69 e2 c9 ba 24 de 6a 72 c4 ef 44 bb
0000000200: 89 a1 05 14 1b 87 3d 6a a3 72 3e 17 ca 7f 39 28
0000000210: ce 16 8b dd 07 52 87 6a 0d 77 42 6d 99 2b 46 2c
0000000220: fd 4b b2 7c d7 c7 17 08 12 54 63 47 9d 14 3d 61
0000000230: ed f2 95 ab 11 80 69 02 a7 66 60 50 7e a4 53 6d
0000000240: ad 01 49 b2 16 8a 95 1d cf 1a 57 93 56 14 5e a3
0000000250: 82 02 59 30 82 02 55 30 0e 06 03 55 1d 0f 01 01
0000000260: ff 04 04 03 02 05 a0 30 13 06 03 55 1d 25 04 0c
0000000270: 30 0a 06 08 2b 06 01 05 05 07 03 11 30 1d 06 03
0000000280: 55 1d 0e 04 16 04 14 40 81 b1 d1 18 75 f0 da 6b
0000000290: 3c 50 5f cd 73 1d d9 77 f2 d7 c1 30 1f 06 03 55
00000002A0: 1d 23 04 18 30 16 80 14 9b 85 5e fb 81 dc 4d 59
00000002B0: 07 51 63 cf be df da 2c 7f c9 44 3c 30 82 01 0f
00000002C0: 06 03 55 1d 1f 04 82 01 06 30 82 01 02 30 81 ff
00000002D0: a0 81 fc a0 81 f9 86 81 b5 68 74 74 70 3a 2f 2f
00000002E0: 74 65 73 74 67 6f 73 74 32 30 31 32 2e 63 72 79
00000002F0: 70 74 6f 70 72 6f 2e 72 75 2f 43 65 72 74 45 6e

00000000300: 72 6f 6c 6c 2f 21 30 34 32 32 21 30 34 33 35 21
00000000310: 30 34 34 31 21 30 34 34 32 21 30 34 33 65 21 30
00000000320: 34 33 32 21 30 34 34 62 21 30 34 33 39 25 32 30
00000000330: 21 30 34 32 33 21 30 34 32 36 25 32 30 21 30 34
00000000340: 31 65 21 30 34 31 65 21 30 34 31 65 25 32 30 21
00000000350: 30 30 32 32 21 30 34 31 61 21 30 34 32 30 21 30
00000000360: 34 31 38 21 30 34 31 66 21 30 34 32 32 21 30 34
00000000370: 31 65 2d 21 30 34 31 66 21 30 34 32 30 21 30 34
00000000380: 31 65 21 30 30 32 32 28 31 29 2e 63 72 6c 86 3f
00000000390: 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32
000000003A0: 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75
000000003B0: 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 74 65 73 74
000000003C0: 67 6f 73 74 32 30 31 32 28 31 29 2e 63 72 6c 30
000000003D0: 81 da 06 08 2b 06 01 05 05 07 01 01 04 81 cd 30
000000003E0: 81 ca 30 44 06 08 2b 06 01 05 05 07 30 02 86 38
000000003F0: 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32
00000000400: 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75
00000000410: 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 72 6f 6f 74
00000000420: 32 30 31 38 2e 63 72 74 30 3f 06 08 2b 06 01 05
00000000430: 05 07 30 01 86 33 68 74 74 70 3a 2f 2f 74 65 73
00000000440: 74 67 6f 73 74 32 30 31 32 2e 63 72 79 70 74 6f
00000000450: 70 72 6f 2e 72 75 2f 6f 63 73 70 32 30 31 32 67
00000000460: 2f 6f 63 73 70 2e 73 72 66 30 41 06 08 2b 06 01
00000000470: 05 05 07 30 01 86 35 68 74 74 70 3a 2f 2f 74 65
00000000480: 73 74 67 6f 73 74 32 30 31 32 2e 63 72 79 70 74
00000000490: 6f 70 72 6f 2e 72 75 2f 6f 63 73 70 32 30 31 32
000000004A0: 67 73 74 2f 6f 63 73 70 2e 73 72 66 30 0a 06 08
000000004B0: 2a 85 03 07 01 01 03 02 03 41 00 21 ee 3b e1 fd
000000004C0: 0f 36 90 92 c4 a2 35 26 e8 dc 4e b8 ef 89 40 70
000000004D0: d2 91 39 bc 79 a6 e2 f7 c1 06 bd d5 d6 ff 72 a5
000000004E0: 6c f2 c0 c3 75 e9 ca 67 81 c1 93 96 b4 bd 18 12
000000004F0: 4c 37 f7 d9 73 d6 4c 8a a6 c4 0a

```
0 1271: SEQUENCE {
4 1188:  SEQUENCE {
8  3:    [0] {
10 1:      INTEGER 2
       :
       }
13 19:      INTEGER
       : 7c 00 03 da a8 9e 1e ff 9e 79 05 fb bb 00 01 00
       : 03 da a8
34 10:      SEQUENCE {
36 8:        OBJECT IDENTIFIER
       :      gost2012Signature256 (1 2 643 7 1 1 3 2)
       :
       }
46 266:      SEQUENCE {
50 24:        SET {
52 22:          SEQUENCE {
54 5:            OBJECT IDENTIFIER '1 2 643 100 1'
61 13:            NumericString '1234567890123'
       :
       }
       :
       }
76 26:        SET {
78 24:          SEQUENCE {
80 8:            OBJECT IDENTIFIER '1 2 643 3 131 1 1'
90 12:            NumericString '001234567890'
       :
       }
       :
       }
104 47:        SET {
106 45:          SEQUENCE {
108 3:            OBJECT IDENTIFIER
       :              streetAddress (2 5 4 9)
113 38:            UTF8String 'ул. Сущёвский вал д. 18'
       :
       }
       :
       }
153 11:        SET {
155 9:          SEQUENCE {
157 3:            OBJECT IDENTIFIER
       :              countryName (2 5 4 6)
162 2:            PrintableString 'RU'
       :
       }
       :
       }
166 25:        SET {
168 23:          SEQUENCE {
170 3:            OBJECT IDENTIFIER
       :              stateOrProvinceName (2 5 4 8)
175 16:            UTF8String 'г. Москва'
       :
       }
       :
       }
193 21:        SET {
195 19:          SEQUENCE {
```

```
197   3:      OBJECT IDENTIFIER
          :         localityName (2 5 4 7)
202  12:      UTF8String 'Москва'
          :         }
          :         }
216  37:      SET {
218  35:        SEQUENCE {
220   3:          OBJECT IDENTIFIER
          :             organizationName (2 5 4 10)
225  28:          UTF8String '000 "КРИПТО-ПРО"'
          :             }
          :             }
255  59:      SET {
257  57:        SEQUENCE {
259   3:          OBJECT IDENTIFIER
          :             commonName (2 5 4 3)
264  50:          UTF8String
          :             'Тестовый УЦ 000 "КРИПТО-ПРО"'
          :             }
          :             }
          :             }
316  30:      SEQUENCE {
318  13:        UTCTime 01/10/2021 06:10:10 GMT
333  13:        UTCTime 01/01/2022 06:20:10 GMT
          :         }
348  68:      SEQUENCE {
350  32:        SET {
352  30:          SEQUENCE {
354   3:            OBJECT IDENTIFIER
          :               commonName (2 5 4 3)
359  23:            PrintableString 'IKE Interop Test Client'
          :               }
          :               }
384  19:      SET {
386  17:        SEQUENCE {
388   3:          OBJECT IDENTIFIER
          :             organizationName (2 5 4 10)
393  10:          PrintableString 'ELVIS-PLUS'
          :             }
          :             }
405  11:      SET {
407   9:        SEQUENCE {
409   3:          OBJECT IDENTIFIER
          :             countryName (2 5 4 6)
414   2:          PrintableString 'RU'
          :             }
          :             }
          :             }
418 170:      SEQUENCE {
```

```
421  33:   SEQUENCE {
423    8:     OBJECT IDENTIFIER
        :       gost2012PublicKey512 (1 2 643 7 1 1 1 2)
433  21:   SEQUENCE {
435    9:     OBJECT IDENTIFIER
        :       cryptoPro2012Sign512A (1 2 643 7 1 2 1 2 1)
446   8:     OBJECT IDENTIFIER
        :       gost2012Digest512 (1 2 643 7 1 1 2 3)
        :     }
        :   }
456 132:   BIT STRING, encapsulates {
460 128:     OCTET STRING
        : ee 2f 0a 0e 09 1e 7e 04 ef ba 5b 62 a2 52 86 e1
        : 9c 24 50 30 50 b0 b4 8a 37 35 b5 fc af 28 94 ec
        : b5 9b 92 41 5b 69 e2 c9 ba 24 de 6a 72 c4 ef 44
        : bb 89 a1 05 14 1b 87 3d 6a a3 72 3e 17 ca 7f 39
        : 28 ce 16 8b dd 07 52 87 6a 0d 77 42 6d 99 2b 46
        : 2c fd 4b b2 7c d7 c7 17 08 12 54 63 47 9d 14 3d
        : 61 ed f2 95 ab 11 80 69 02 a7 66 60 50 7e a4 53
        : 6d ad 01 49 b2 16 8a 95 1d cf 1a 57 93 56 14 5e
        :   }
        :   }
591 601: [3] {
595 597:   SEQUENCE {
599 14:     SEQUENCE {
601  3:       OBJECT IDENTIFIER
        :         keyUsage (2 5 29 15)
606  1:       BOOLEAN TRUE
609  4:       OCTET STRING, encapsulates {
611  2:         BIT STRING 5 unused bits
        :           '101'B
        :         }
        :       }
615 19:     SEQUENCE {
617  3:       OBJECT IDENTIFIER
        :         extKeyUsage (2 5 29 37)
622 12:     OCTET STRING, encapsulates {
624 10:       SEQUENCE {
626  8:         OBJECT IDENTIFIER
        :           ipsecIKE (1 3 6 1 5 5 7 3 17)
        :         }
        :       }
        :     }
636 29:     SEQUENCE {
638  3:       OBJECT IDENTIFIER
        :         subjectKeyIdentifier (2 5 29 14)
643 22:     OCTET STRING, encapsulates {
645 20:       OCTET STRING
        : 40 81 b1 d1 18 75 f0 da 6b 3c 50 5f cd 73 1d d9
```

```
: 77 f2 d7 c1
: }
:
667 31: SEQUENCE {
669 3: OBJECT IDENTIFIER
: authorityKeyIdentifier (2 5 29 35)
674 24: OCTET STRING, encapsulates {
676 22: SEQUENCE {
678 20: [0]
: 9b 85 5e fb 81 dc 4d 59 07 51 63 cf be df da 2c
: 7f c9 44 3c
: }
:
: }
700 271: SEQUENCE {
704 3: OBJECT IDENTIFIER
: cRLDistributionPoints (2 5 29 31)
709 262: OCTET STRING, encapsulates {
713 258: SEQUENCE {
717 255: SEQUENCE {
720 252: [0] {
723 249: [0] {
726 181: [6]
:
: 'http://testgost2012.cryptopro.ru/CertEnroll/!042'
: '2!0435!0441!0442!043e!0432!044b!0439%20!0423!042'
: '6%20!041e!041e!041e%20!0022!041a!0420!0418!041f!'
: '0422!041e-!041f!0420!041e!0022(1).crl'
910 63: [6]
:
: 'http://testgost2012.cryptopro.ru/CertEnroll/test'
: 'gost2012(1).crl'
:
: }
:
: }
:
: }
:
: }
975 218: SEQUENCE {
978 8: OBJECT IDENTIFIER
: authorityInfoAccess (1 3 6 1 5 5 7 1 1)
988 205: OCTET STRING, encapsulates {
991 202: SEQUENCE {
994 68: SEQUENCE {
996 8: OBJECT IDENTIFIER
: caIssuers (1 3 6 1 5 5 7 48 2)
1006 56: [6]
:
: 'http://testgost2012.cryptopro.ru/CertEnroll/root'
: '2018.crt'
:
: }
1064 63: SEQUENCE {
```

```

1066   8:      OBJECT IDENTIFIER
           :          ocsp (1 3 6 1 5 5 7 48 1)
1076  51:      [6]
           :          'http://testgost2012.cryptopro.ru/ocsp2012g/ocsp.'
           :          'srf'
           :          }
1129  65:      SEQUENCE {
1131   8:          OBJECT IDENTIFIER
           :              ocsp (1 3 6 1 5 5 7 48 1)
1141  53:          [6]
           :              'http://testgost2012.cryptopro.ru/ocsp2012gst/ocs'
           :              'p.srf'
           :              }
           :              }
           :              }
           :              }
           :              }
           :              }
           :              }
1196  10:     SEQUENCE {
1198   8:         OBJECT IDENTIFIER
           :             gost2012Signature256 (1 2 643 7 1 1 3 2)
           :             }
1208  65:     BIT STRING
           : 21 ee 3b e1 fd 0f 36 90 92 c4 a2 35 26 e8 dc 4e
           : b8 ef 89 40 70 d2 91 39 bc 79 a6 e2 f7 c1 06 bd
           : d5 d6 ff 72 a5 6c f2 c0 c3 75 e9 ca 67 81 c1 93
           : 96 b4 bd 18 12 4c 37 f7 d9 73 d6 4c 8a a6 c4 0a
           :     }

```

The responder's certificate private key (little endian):

```

0000000000: cb 73 0c 81 6f ac 6d 81 9f 82 ae 15 a9 08 12 17
0000000010: d3 1b 97 64 b7 1c 34 0d d3 dd 90 1f 15 8c 9b 06

```

The responder's certificate:

00000000000: 30 82 04 b2 30 82 04 5f a0 03 02 01 02 02 13 7c
0000000010: 00 03 d9 02 ec f9 34 3e c8 aa d6 59 00 01 00 03
0000000020: d9 02 30 0a 06 08 2a 85 03 07 01 01 03 02 30 82
0000000030: 01 0a 31 18 30 16 06 05 2a 85 03 64 01 12 0d 31
0000000040: 32 33 34 35 36 37 38 39 30 31 32 33 31 1a 30 18
0000000050: 06 08 2a 85 03 03 81 03 01 01 12 0c 30 30 31 32
0000000060: 33 34 35 36 37 38 39 30 31 2f 30 2d 06 03 55 04
0000000070: 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83 d1 89 d1
0000000080: 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0 b2 d0 b0
0000000090: d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09 06 03 55
00000000A0: 04 06 13 02 52 55 31 19 30 17 06 03 55 04 08 0c
00000000B0: 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba d0 b2 d0
00000000C0: b0 31 15 30 13 06 03 55 04 07 0c 0c d0 9c d0 be
00000000D0: d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06 03 55 04
00000000E0: 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000000F0: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 31
0000000100: 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0 b5 d1 81
0000000110: d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3 d0 a6 20
0000000120: d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0 98 d0 9f
0000000130: d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30 1e 17 0d
0000000140: 32 31 30 39 33 30 31 33 32 34 30 36 5a 17 0d 32
0000000150: 31 31 32 33 30 31 33 33 34 30 36 5a 30 44 31 20
0000000160: 30 1e 06 03 55 04 03 13 17 49 4b 45 20 49 6e 74
0000000170: 65 72 6f 70 20 54 65 73 74 20 53 65 72 76 65 72
0000000180: 31 13 30 11 06 03 55 04 0a 13 0a 45 4c 56 49 53
0000000190: 2d 50 4c 55 53 31 0b 30 09 06 03 55 04 06 13 02
00000001A0: 52 55 30 66 30 1f 06 08 2a 85 03 07 01 01 01 01
00000001B0: 30 13 06 07 2a 85 03 02 02 24 00 06 08 2a 85 03
00000001C0: 07 01 01 02 02 03 43 00 04 40 5b b3 14 3e f4 70
00000001D0: c1 70 d7 f3 27 25 d8 53 7c e6 de 6d 8c 29 f6 b2
00000001E0: 32 64 56 dc b1 77 f2 3d fa f4 2a 5c f3 74 86 7f
00000001F0: 04 72 51 c1 cf b3 43 36 f5 95 a2 af 05 47 57 1a
0000000200: 55 c0 78 a4 9d 64 26 b8 61 14 a3 82 02 59 30 82
0000000210: 02 55 30 0e 06 03 55 1d 0f 01 01 ff 04 04 03 02
0000000220: 05 a0 30 13 06 03 55 1d 25 04 0c 30 0a 06 08 2b
0000000230: 06 01 05 05 07 03 11 30 1d 06 03 55 1d 0e 04 16
0000000240: 04 14 e0 d3 f0 09 ad ce 6c a5 47 ba 9b f7 a6 a5
0000000250: 1b 06 14 ba a5 43 30 1f 06 03 55 1d 23 04 18 30
0000000260: 16 80 14 9b 85 5e fb 81 dc 4d 59 07 51 63 cf be
0000000270: df da 2c 7f c9 44 3c 30 82 01 0f 06 03 55 1d 1f
0000000280: 04 82 01 06 30 82 01 02 30 81 ff a0 81 fc a0 81
0000000290: f9 86 81 b5 68 74 74 70 3a 2f 2f 74 65 73 74 67
00000002A0: 6f 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72
00000002B0: 6f 2e 72 75 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f
00000002C0: 21 30 34 32 32 21 30 34 33 35 21 30 34 34 31 21
00000002D0: 30 34 34 32 21 30 34 33 65 21 30 34 33 32 21 30
00000002E0: 34 34 62 21 30 34 33 39 25 32 30 21 30 34 32 33
00000002F0: 21 30 34 32 36 25 32 30 21 30 34 31 65 21 30 34

00000000300: 31 65 21 30 34 31 65 25 32 30 21 30 30 32 32 21
00000000310: 30 34 31 61 21 30 34 32 30 21 30 34 31 38 21 30
00000000320: 34 31 66 21 30 34 32 32 21 30 34 31 65 2d 21 30
00000000330: 34 31 66 21 30 34 32 30 21 30 34 31 65 21 30 30
00000000340: 32 32 28 31 29 2e 63 72 6c 86 3f 68 74 74 70 3a
00000000350: 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32 2e 63
00000000360: 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65 72 74
00000000370: 45 6e 72 6f 6c 6c 2f 74 65 73 74 67 6f 73 74 32
00000000380: 30 31 32 28 31 29 2e 63 72 6c 30 81 da 06 08 2b
00000000390: 06 01 05 05 07 01 01 04 81 cd 30 81 ca 30 44 06
000000003A0: 08 2b 06 01 05 05 07 30 02 86 38 68 74 74 70 3a
000000003B0: 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32 2e 63
000000003C0: 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65 72 74
000000003D0: 45 6e 72 6f 6c 6c 2f 72 6f 6f 74 32 30 31 38 2e
000000003E0: 63 72 74 30 3f 06 08 2b 06 01 05 05 07 30 01 86
000000003F0: 33 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74
00000000400: 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72
00000000410: 75 2f 6f 63 73 70 32 30 31 32 67 2f 6f 63 73 70
00000000420: 2e 73 72 66 30 41 06 08 2b 06 01 05 05 07 30 01
00000000430: 86 35 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73
00000000440: 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e
00000000450: 72 75 2f 6f 63 73 70 32 30 31 32 67 73 74 2f 6f
00000000460: 63 73 70 2e 73 72 66 30 0a 06 08 2a 85 03 07 01
00000000470: 01 03 02 03 41 00 a5 39 5f ca 48 e1 c2 93 c1 e0
00000000480: 8a 64 74 0f 6b 86 a2 15 9b 46 29 d0 42 71 4f ce
00000000490: e7 52 d7 d7 3d aa 47 ce cf 52 63 8f 26 b2 17 5f
000000004A0: ad 96 57 76 ea 5f d0 87 bb 12 29 e4 06 0e e1 5f
000000004B0: fd 59 81 fb 34 6d

```
0 1202: SEQUENCE {
4 1119:  SEQUENCE {
8  3:   [0] {
10 1:     INTEGER 2
      :
      }
13 19:   INTEGER
      : 7c 00 03 d9 02 ec f9 34 3e c8 aa d6 59 00 01 00
      : 03 d9 02
34 10:   SEQUENCE {
36 8:     OBJECT IDENTIFIER
      :   gost2012Signature256 (1 2 643 7 1 1 3 2)
      :
      }
46 266: SEQUENCE {
50 24:   SET {
52 22:     SEQUENCE {
54 5:       OBJECT IDENTIFIER '1 2 643 100 1'
56 13:       NumericString '1234567890123'
      :
      }
      :
      }
76 26:   SET {
78 24:     SEQUENCE {
80 8:       OBJECT IDENTIFIER '1 2 643 3 131 1 1'
82 12:       NumericString '001234567890'
      :
      }
      :
      }
104 47:   SET {
106 45:     SEQUENCE {
108 3:       OBJECT IDENTIFIER
      :         streetAddress (2 5 4 9)
113 38:       UTF8String 'ул. Сущёвский вал д. 18'
      :
      }
      :
      }
153 11:   SET {
155 9:     SEQUENCE {
157 3:       OBJECT IDENTIFIER
      :         countryName (2 5 4 6)
162 2:       PrintableString 'RU'
      :
      }
      :
      }
166 25:   SET {
168 23:     SEQUENCE {
170 3:       OBJECT IDENTIFIER
      :         stateOrProvinceName (2 5 4 8)
175 16:       UTF8String 'г. Москва'
      :
      }
      :
      }
193 21:   SET {
195 19:     SEQUENCE {
```

```
197   3:      OBJECT IDENTIFIER
          :         localityName (2 5 4 7)
202  12:      UTF8String 'Москва'
          :         }
          :         }
216  37:      SET {
218  35:        SEQUENCE {
220   3:          OBJECT IDENTIFIER
          :             organizationName (2 5 4 10)
225  28:          UTF8String '000 "КРИПТО-ПРО"'
          :             }
          :             }
255  59:      SET {
257  57:        SEQUENCE {
259   3:          OBJECT IDENTIFIER
          :             commonName (2 5 4 3)
264  50:          UTF8String
          :             'Тестовый УЦ 000 "КРИПТО-ПРО"'
          :             }
          :             }
          :             }
316  30:      SEQUENCE {
318  13:        UTCTime 30/09/2021 13:24:06 GMT
333  13:        UTCTime 30/12/2021 13:34:06 GMT
          :         }
348  68:      SEQUENCE {
350  32:        SET {
352  30:          SEQUENCE {
354   3:            OBJECT IDENTIFIER
          :               commonName (2 5 4 3)
359  23:            PrintableString 'IKE Interop Test Server'
          :               }
          :               }
384  19:      SET {
386  17:        SEQUENCE {
388   3:          OBJECT IDENTIFIER
          :             organizationName (2 5 4 10)
393  10:          PrintableString 'ELVIS-PLUS'
          :             }
          :             }
405  11:      SET {
407   9:        SEQUENCE {
409   3:          OBJECT IDENTIFIER
          :             countryName (2 5 4 6)
414   2:          PrintableString 'RU'
          :             }
          :             }
          :             }
418 102:      SEQUENCE {
```

```
420  31:   SEQUENCE {
422    8:     OBJECT IDENTIFIER
        :       gost2012PublicKey256 (1 2 643 7 1 1 1 1)
432  19:   SEQUENCE {
434    7:     OBJECT IDENTIFIER
        :       cryptoProSignXA (1 2 643 2 2 36 0)
443  8:     OBJECT IDENTIFIER
        :       gost2012Digest256 (1 2 643 7 1 1 2 2)
        :     }
        :   }
453  67:   BIT STRING, encapsulates {
456  64:     OCTET STRING
        :       5b b3 14 3e f4 70 c1 70 d7 f3 27 25 d8 53 7c e6
        :       de 6d 8c 29 f6 b2 32 64 56 dc b1 77 f2 3d fa f4
        :       2a 5c f3 74 86 7f 04 72 51 c1 cf b3 43 36 f5 95
        :       a2 af 05 47 57 1a 55 c0 78 a4 9d 64 26 b8 61 14
        :     }
        :   }
522  601: [3] {
526  597:   SEQUENCE {
530  14:     SEQUENCE {
532    3:       OBJECT IDENTIFIER
        :         keyUsage (2 5 29 15)
537    1:       BOOLEAN TRUE
540    4:     OCTET STRING, encapsulates {
542    2:       BIT STRING 5 unused bits
        :         '101'B
        :       }
        :     }
546    19:   SEQUENCE {
548    3:     OBJECT IDENTIFIER
        :       extKeyUsage (2 5 29 37)
553   12:   OCTET STRING, encapsulates {
555   10:     SEQUENCE {
557    8:       OBJECT IDENTIFIER
        :         ipsecIKE (1 3 6 1 5 5 7 3 17)
        :       }
        :     }
        :   }
567   29:   SEQUENCE {
569    3:     OBJECT IDENTIFIER
        :       subjectKeyIdentifier (2 5 29 14)
574   22:     OCTET STRING, encapsulates {
576   20:       OCTET STRING
        :         e0 d3 f0 09 ad ce 6c a5 47 ba 9b f7 a6 a5 1b 06
        :         14 ba a5 43
        :       }
        :     }
598   31:   SEQUENCE {
```



```
:           'srf'
:
:       }
1060   65:      SEQUENCE {
1062     8:        OBJECT IDENTIFIER
:          ocsp (1 3 6 1 5 5 7 48 1)
1072   53:        [6]
:          [
1073     8:            'http://testgost2012.cryptopro.ru/ocsp2012gst/ocs'
1074     8:            'p.srf'
:            ]
1075     8:        ]
1076     8:      }
1077     8:    }
1078     8:  }
1079     8:  }
1080     8:  }
1081     8:  }
1082     8:  }
1083     8:  }
1084     8:  }
1085     8:  }
1086     8:  }
1087     8:  }
1088     8:  }
1089     8:  }
1090     8:  }
1091     8:  }
1092     8:  }
1093     8:  }
1094     8:  }
1095     8:  }
1096     8:  }
1097     8:  }
1098     8:  }
1099     8:  }
1100     8:  }
1101     8:  }
1102     8:  }
1103     8:  }
1104     8:  }
1105     8:  }
1106     8:  }
1107     8:  }
1108     8:  }
1109     8:  }
1110     8:  }
1111     8:  }
1112     8:  }
1113     8:  }
1114     8:  }
1115     8:  }
1116     8:  }
1117   10:      SEQUENCE {
1118     8:        OBJECT IDENTIFIER
:          gost2012Signature256 (1 2 643 7 1 1 3 2)
:        }
1119   65:      BIT STRING
:         a5 39 5f ca 48 e1 c2 93 c1 e0 8a 64 74 0f 6b 86
:         a2 15 9b 46 29 d0 42 71 4f ce e7 52 d7 d7 3d aa
:         47 ce cf 52 63 8f 26 b2 17 5f ad 96 57 76 ea 5f
:         d0 87 bb 12 29 e4 06 0e e1 5f fd 59 81 fb 34 6d
:         }
```

CA certificate:

00000000000: 30 82 05 1c 30 82 04 c9 a0 03 02 01 02 02 10 3b
0000000010: 20 8a e5 fd 46 68 86 49 a0 50 fa af a8 83 93 30
0000000020: 0a 06 08 2a 85 03 07 01 01 03 02 30 82 01 0a 31
0000000030: 18 30 16 06 05 2a 85 03 64 01 12 0d 31 32 33 34
0000000040: 35 36 37 38 39 30 31 32 33 31 1a 30 18 06 08 2a
0000000050: 85 03 03 81 03 01 01 12 0c 30 30 31 32 33 34 35
0000000060: 36 37 38 39 30 31 2f 30 2d 06 03 55 04 09 0c 26
0000000070: d1 83 d0 bb 2e 20 d0 a1 d1 83 d1 89 d1 91 d0 b2
0000000080: d1 81 d0 ba d0 b8 d0 b9 20 d0 b2 d0 b0 d0 bb 20
0000000090: d0 b4 2e 20 31 38 31 0b 30 09 06 03 55 04 06 13
00000000A0: 02 52 55 31 19 30 17 06 03 55 04 08 0c 10 d0 b3
00000000B0: 2e 20 d0 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 15
00000000C0: 30 13 06 03 55 04 07 0c 0c d0 9c d0 be d1 81 d0
00000000D0: ba d0 b2 d0 b0 31 25 30 23 06 03 55 04 0a 0c 1c
00000000E0: d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0 98 d0 9f
00000000F0: d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 31 3b 30 39
0000000100: 06 03 55 04 03 0c 32 d0 a2 d0 b5 d1 81 d1 82 d0
0000000110: be d0 b2 d1 8b d0 b9 20 d0 a3 d0 a6 20 d0 9e d0
0000000120: 9e d0 9e 20 22 d0 9a d0 a0 d0 98 d0 9f d0 a2 d0
0000000130: 9e 2d d0 9f d0 a0 d0 9e 22 30 1e 17 0d 31 38 30
0000000140: 39 31 32 31 30 31 39 33 30 5a 17 0d 32 33 30 39
0000000150: 31 32 31 30 32 38 35 35 5a 30 82 01 0a 31 18 30
0000000160: 16 06 05 2a 85 03 64 01 12 0d 31 32 33 34 35 36
0000000170: 37 38 39 30 31 32 33 31 1a 30 18 06 08 2a 85 03
0000000180: 03 81 03 01 01 12 0c 30 30 31 32 33 34 35 36 37
0000000190: 38 39 30 31 2f 30 2d 06 03 55 04 09 0c 26 d1 83
00000001A0: d0 bb 2e 20 d0 a1 d1 83 d1 89 d1 91 d0 b2 d1 81
00000001B0: d0 ba d0 b8 d0 b9 20 d0 b2 d0 b0 d0 bb 20 d0 b4
00000001C0: 2e 20 31 38 31 0b 30 09 06 03 55 04 06 13 02 52
00000001D0: 55 31 19 30 17 06 03 55 04 08 0c 10 d0 b3 2e 20
00000001E0: d0 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 15 30 13
00000001F0: 06 03 55 04 07 0c 0c d0 9c d0 be d1 81 d0 ba d0
0000000200: b2 d0 b0 31 25 30 23 06 03 55 04 0a 0c 1c d0 9e
0000000210: d0 9e d0 9e 20 22 d0 9a d0 a0 d0 98 d0 9f d0 a2
0000000220: d0 9e 2d d0 9f d0 a0 d0 9e 22 31 3b 30 39 06 03
0000000230: 55 04 03 0c 32 d0 a2 d0 b5 d1 81 d1 82 d0 be d0
0000000240: b2 d1 8b d0 b9 20 d0 a3 d0 a6 20 d0 9e d0 9e d0
0000000250: 9e 20 22 d0 9a d0 a0 d0 98 d0 9f d0 a2 d0 9e 2d
0000000260: d0 9f d0 a0 d0 9e 22 30 66 30 1f 06 08 2a 85 03
0000000270: 07 01 01 01 01 30 13 06 07 2a 85 03 02 02 23 01
0000000280: 06 08 2a 85 03 07 01 01 02 02 03 43 00 04 40 98
0000000290: 1f fd a9 50 cd 21 86 30 f4 59 06 72 a9 d6 3d 6b
00000002A0: c0 33 82 06 46 37 e3 dc 21 4a b1 f8 9f b7 56 ec
00000002B0: a5 2d b5 81 87 b6 9d c2 2e df fd 09 33 53 9c 18
00000002C0: 32 ac d7 42 2e 09 a5 f4 36 a3 a5 c1 d2 22 f0 a3
00000002D0: 82 01 fe 30 82 01 fa 30 36 06 05 2a 85 03 64 6f
00000002E0: 04 2d 0c 2b 22 d0 9a d1 80 d0 b8 d0 bf d1 82 d0
00000002F0: be d0 9f d1 80 d0 be 20 43 53 50 22 20 28 d0 b2

00000000300: d0 b5 d1 80 d1 81 d0 b8 d1 8f 20 34 2e 30 29 30
00000000310: 82 01 21 06 05 2a 85 03 64 70 04 82 01 16 30 82
00000000320: 01 12 0c 2b 22 d0 9a d1 80 d0 b8 d0 bf d1 82 d0
00000000330: be d0 9f d1 80 d0 be 20 43 53 50 22 20 28 d0 b2
00000000340: d0 b5 d1 80 d1 81 d0 b8 d1 8f 20 34 2e 30 29 0c
00000000350: 41 d0 a3 d0 b4 d0 be d1 81 d1 82 d0 be d0 b2 d0
00000000360: b5 d1 80 d1 8f d1 8e d1 89 d0 b8 d0 b9 20 d1 86
00000000370: d0 b5 d0 bd d1 82 d1 80 20 22 d0 9a d1 80 d0 b8
00000000380: d0 bf d1 82 d0 be d0 9f d1 80 d0 be 20 d0 a3 d0
00000000390: a6 22 0c 4f d0 a1 d0 b5 d1 80 d1 82 d0 b8 d1 84
000000003A0: d0 b8 d0 ba d0 b0 d1 82 20 d1 81 d0 be d0 be d1
000000003B0: 82 d0 b2 d0 b5 d1 82 d1 81 d1 82 d0 b2 d0 b8 d1
000000003C0: 8f 20 e2 84 96 20 d0 a1 d0 a4 2f 30 30 30 2d 30
000000003D0: 30 30 30 20 d0 be d1 82 20 30 30 2e 30 30 2e 30
000000003E0: 30 30 30 0c 4f d0 a1 d0 b5 d1 80 d1 82 d0 b8 d1
000000003F0: 84 d0 b8 d0 ba d0 b0 d1 82 20 d1 81 d0 be d0 be
00000000400: d1 82 d0 b2 d0 b5 d1 82 d1 81 d1 82 d0 b2 d0 b8
00000000410: d1 8f 20 e2 84 96 20 d0 a1 d0 a4 2f 30 30 30 2d
00000000420: 30 30 30 30 20 d0 be d1 82 20 30 30 2e 30 30 2e
00000000430: 30 30 30 30 0b 06 03 55 1d 0f 04 04 03 02 01
00000000440: 86 30 0f 06 03 55 1d 13 01 01 ff 04 05 30 03 01
00000000450: 01 ff 30 1d 06 03 55 1d 0e 04 16 04 14 9b 85 5e
00000000460: fb 81 dc 4d 59 07 51 63 cf be df da 2c 7f c9 44
00000000470: 3c 30 12 06 09 2b 06 01 04 01 82 37 15 01 04 05
00000000480: 02 03 01 00 01 30 25 06 03 55 1d 20 04 1e 30 1c
00000000490: 30 08 06 06 2a 85 03 64 71 01 30 08 06 06 2a 85
000000004A0: 03 64 71 02 30 06 06 04 55 1d 20 00 30 23 06 09
000000004B0: 2b 06 01 04 01 82 37 15 02 04 16 04 14 c8 da 66
000000004C0: cb b6 97 d2 3e c9 67 1d c2 5b 64 3a ab dc bb cf
000000004D0: 69 30 0a 06 08 2a 85 03 07 01 01 03 02 03 41 00
000000004E0: 3e 95 cd d8 1f 95 bd 09 ab 73 82 f5 04 e0 f2 66
000000004F0: 12 32 82 9b 2b 03 cc 4b c0 b3 73 f8 e7 0d d6 bd
00000000500: 83 c8 27 2d 01 c1 ec ef 65 5d ac 77 fd dd da 9d
00000000510: 04 e2 bf e8 02 7f 87 36 1b cf ac 7a 28 9c 21 fe

```
0 1308: SEQUENCE {
4 1225:  SEQUENCE {
8  3:    [0] {
10 1:      INTEGER 2
       :
       }
13 16:    INTEGER
       : 3b 20 8a e5 fd 46 68 86 49 a0 50 fa af a8 83 93
31 10:    SEQUENCE {
33  8:      OBJECT IDENTIFIER
       :      gost2012Signature256 (1 2 643 7 1 1 3 2)
       :
       }
43 266:  SEQUENCE {
47 24:    SET {
49 22:      SEQUENCE {
51  5:        OBJECT IDENTIFIER '1 2 643 100 1'
58 13:        NumericString '1234567890123'
       :
       }
       :
       }
73 26:    SET {
75 24:      SEQUENCE {
77  8:        OBJECT IDENTIFIER '1 2 643 3 131 1 1'
87 12:        NumericString '001234567890'
       :
       }
       :
       }
101 47:    SET {
103 45:      SEQUENCE {
105  3:        OBJECT IDENTIFIER
       :        streetAddress (2 5 4 9)
110 38:        UTF8String 'ул. Сущёвский вал д. 18'
       :
       }
       :
       }
150 11:    SET {
152  9:      SEQUENCE {
154  3:        OBJECT IDENTIFIER
       :        countryName (2 5 4 6)
159  2:        PrintableString 'RU'
       :
       }
       :
       }
163 25:    SET {
165 23:      SEQUENCE {
167  3:        OBJECT IDENTIFIER
       :        stateOrProvinceName (2 5 4 8)
172 16:        UTF8String 'г. Москва'
       :
       }
       :
       }
190 21:    SET {
192 19:      SEQUENCE {
194  3:        OBJECT IDENTIFIER
```

```
:          localityName (2 5 4 7)
199 12:      UTF8String 'Москва'
:      }
:
213 37:      SET {
215 35:          SEQUENCE {
217 3:              OBJECT IDENTIFIER
:                  organizationName (2 5 4 10)
222 28:          UTF8String '000 "КРИПТО-ПРО"'
:                  }
:
252 59:      SET {
254 57:          SEQUENCE {
256 3:              OBJECT IDENTIFIER
:                  commonName (2 5 4 3)
261 50:          UTF8String
:                  'Тестовый УЦ 000 "КРИПТО-ПРО"'
:                  }
:
291 30:      SEQUENCE {
315 13:          UTCTime 12/09/2018 10:19:30 GMT
330 13:          UTCTime 12/09/2023 10:28:55 GMT
:
345 266:      SEQUENCE {
349 24:          SET {
351 22:              SEQUENCE {
353 5:                  OBJECT IDENTIFIER '1 2 643 100 1'
360 13:                  NumericString '1234567890123'
:
375 26:          SET {
377 24:              SEQUENCE {
379 8:                  OBJECT IDENTIFIER '1 2 643 3 131 1 1'
389 12:                  NumericString '001234567890'
:
403 47:          SET {
405 45:              SEQUENCE {
407 3:                  OBJECT IDENTIFIER
:                      streetAddress (2 5 4 9)
412 38:                  UTF8String 'ул. Сущёвский вал д. 18'
:
452 11:          SET {
454 9:              SEQUENCE {
456 3:                  OBJECT IDENTIFIER
:                      countryName (2 5 4 6)
461 2:                  PrintableString 'RU'
```

```
:        }
:
}
465 25: SET {
467 23:   SEQUENCE {
469  3:     OBJECT IDENTIFIER
:       stateOrProvinceName (2 5 4 8)
474 16:     UTF8String 'г. Москва'
:
:     }
:
}
492 21: SET {
494 19:   SEQUENCE {
496  3:     OBJECT IDENTIFIER
:       localityName (2 5 4 7)
501 12:     UTF8String 'Москва'
:
:     }
:
}
515 37: SET {
517 35:   SEQUENCE {
519  3:     OBJECT IDENTIFIER
:       organizationName (2 5 4 10)
524 28:     UTF8String '000 "КРИПТО-ПРО"'
:
:     }
:
}
554 59: SET {
556 57:   SEQUENCE {
558  3:     OBJECT IDENTIFIER
:       commonName (2 5 4 3)
563 50:     UTF8String
:       'Тестовый УЦ 000 "КРИПТО-ПРО"'
:
:     }
:
}
615 102: SEQUENCE {
617 31:   SEQUENCE {
619  8:     OBJECT IDENTIFIER
:       gost2012PublicKey256 (1 2 643 7 1 1 1 1)
629 19:   SEQUENCE {
631  7:     OBJECT IDENTIFIER
:       cryptoProSignA (1 2 643 2 2 35 1)
640  8:     OBJECT IDENTIFIER
:       gost2012Digest256 (1 2 643 7 1 1 2 2)
:
:     }
:
}
650 67: BIT STRING, encapsulates {
653 64:   OCTET STRING
:
: 98 1f fd a9 50 cd 21 86 30 f4 59 06 72 a9 d6 3d
: 6b c0 33 82 06 46 37 e3 dc 21 4a b1 f8 9f b7 56
: ec a5 2d b5 81 87 b6 9d c2 2e df fd 09 33 53 9c
: 18 32 ac d7 42 2e 09 a5 f4 36 a3 a5 c1 d2 22 f0
```

```
:      }
:
}
719 510: [3] {
723 506:   SEQUENCE {
727 54:     SEQUENCE {
729 5:       OBJECT IDENTIFIER '1 2 643 100 111'
736 45:       OCTET STRING, encapsulates {
738 43:         UTF8String
:
:           '"КриптоПро CSP" (версия 4.0)'
:
:         }
:
:       }
783 289:     SEQUENCE {
787 5:       OBJECT IDENTIFIER '1 2 643 100 112'
794 278:       OCTET STRING, encapsulates {
798 274:         SEQUENCE {
802 43:           UTF8String
:
:             '"КриптоПро CSP" (версия 4.0)'
847 65:           UTF8String
:
:             'Удостоверяющий центр "КриптоПро УЦ"'
914 79:           UTF8String
:
:             'Сертификат соответствия № СФ/000-0000 от 00.00.'
:
:             '0000'
995 79:           UTF8String
:
:             'Сертификат соответствия № СФ/000-0000 от 00.00.'
:
:             '0000'
:
:           }
:
:         }
:
:       }
1076 11:     SEQUENCE {
1078 3:       OBJECT IDENTIFIER
:
:         keyUsage (2 5 29 15)
1083 4:       OCTET STRING, encapsulates {
1085 2:         BIT STRING 1 unused bit
:
:           '1100001'B
:
:         }
:
:       }
1089 15:     SEQUENCE {
1091 3:       OBJECT IDENTIFIER
:
:         basicConstraints (2 5 29 19)
1096 1:       BOOLEAN TRUE
1099 5:       OCTET STRING, encapsulates {
1101 3:         SEQUENCE {
1103 1:           BOOLEAN TRUE
:
:           }
:
:         }
:
:       }
1106 29:     SEQUENCE {
1108 3:       OBJECT IDENTIFIER
:
:         subjectKeyIdentifier (2 5 29 14)
```


```
1113  22:      OCTET STRING, encapsulates {
1115  20:          OCTET STRING
: 9b 85 5e fb 81 dc 4d 59 07 51 63 cf be df da 2c
: 7f c9 44 3c
:     }
:     }
1137 18:      SEQUENCE {
1139  9:          OBJECT IDENTIFIER
:             cAKeyCertIndexPair (1 3 6 1 4 1 311 21 1)
1150  5:          OCTET STRING, encapsulates {
1152  3:              INTEGER 65537
:                 }
:                 }
1157 37:      SEQUENCE {
1159  3:          OBJECT IDENTIFIER
:             certificatePolicies (2 5 29 32)
1164 30:          OCTET STRING, encapsulates {
1166 28:              SEQUENCE {
1168  8:                  SEQUENCE {
1170  6:                      OBJECT IDENTIFIER '1 2 643 100 113 1'
:                         }
1178  8:                  SEQUENCE {
1180  6:                      OBJECT IDENTIFIER '1 2 643 100 113 2'
:                         }
1188  6:                  SEQUENCE {
1190  4:                      OBJECT IDENTIFIER
:                         anyPolicy (2 5 29 32 0)
:                         }
:                         }
:                         }
1196 35:      SEQUENCE {
1198  9:          OBJECT IDENTIFIER
:             certSrvPreviousCertHash (1 3 6 1 4 1 311 21 2)
1209 22:          OCTET STRING, encapsulates {
1211 20:              OCTET STRING
: c8 da 66 cb b6 97 d2 3e c9 67 1d c2 5b 64 3a ab
: dc bb cf 69
:     }
:     }
:     }
:     }
1233 10:      SEQUENCE {
1235  8:          OBJECT IDENTIFIER
:             gost2012Signature256 (1 2 643 7 1 1 3 2)
:             }
1245 65:      BIT STRING
: 3e 95 cd d8 1f 95 bd 09 ab 73 82 f5 04 e0 f2 66
```

```

: 12 32 82 9b 2b 03 cc 4b c0 b3 73 f8 e7 0d d6 bd
: 83 c8 27 2d 01 c1 ec ef 65 5d ac 77 fd dd da 9d
: 04 e2 bf e8 02 7f 87 36 1b cf ac 7a 28 9c 21 fe
:
```

This scenario includes four sub-scenarios.

Sub-scenario 1: Establishing of IKE and ESP SAs using the IKE_SA_INIT and the IKE_AUTH exchanges.

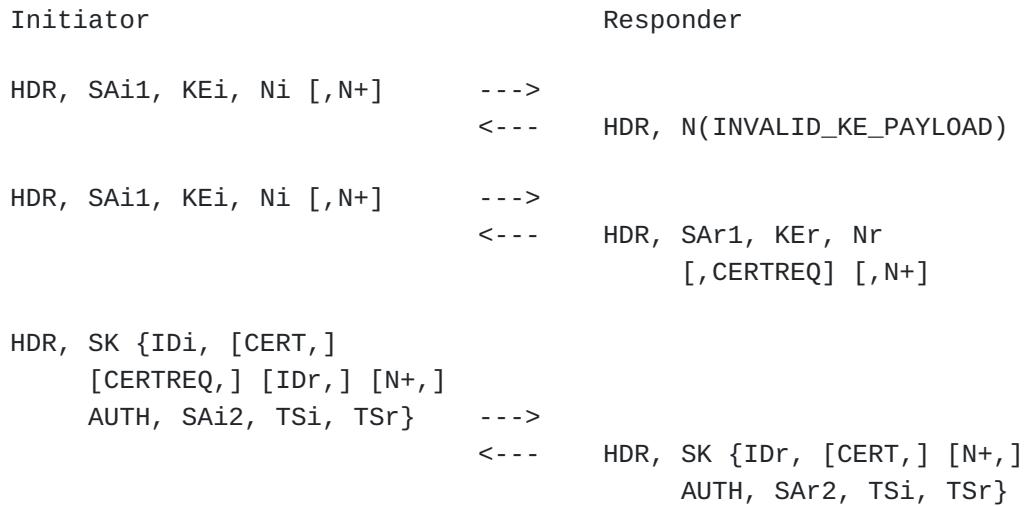

Initiator's actions:

(1) Generates random SPIi for IKE SA

```
00000000: 92 80 e0 82 2e 75 87 78
```

(2) Generates random IKE nonce Ni

```
00000000: 98 44 d5 40 ef 89 46 f4 55 20 0a 55 73 dc ad 73
00000010: dd 2a 6f a8 31 f8 49 05 f5 8e 17 a2 6c cc 01 1f
```

(3)

Generates ephemeral private key (512 bit)

```
00000000: 82 fb 1c 90 c3 a3 c2 16 7f 76 15 5d 69 06 f8 47  
00000010: 3e fe 83 3e 21 cd e7 a4 e5 cd d9 71 ef d3 c5 db  
00000020: 7e de 50 70 48 96 90 01 0c 81 02 b9 4b 56 f6 47  
00000030: cb 27 40 25 58 55 80 32 e9 59 17 10 3b 0f eb 3b
```

(4) Computes public key

```
00000000: 89 77 c6 d7 2b 08 5d d5 48 b1 ea 5d 99 c5 03 09  
00000010: c6 62 fe d7 7d 84 a4 d8 8b 9b a5 c8 3a 7a 05 86  
00000020: e2 0d 8d 9b 5d ce 01 18 e2 d2 da 73 83 ee 30 ad  
00000030: 49 88 44 6f bd 18 78 b4 bb da c9 df 1a ca d1 2a  
00000040: 05 98 75 da 9e 9a 21 e4 db 71 8f af d1 96 c7 8b  
00000050: de 9a b2 98 f7 55 bb 74 38 34 a4 da 47 ab 86 15  
00000060: d4 c8 33 70 b7 02 79 b8 7f c2 97 6d 03 8f 2d 08  
00000070: d7 ab ac 85 4c bf 5a f6 27 57 ad fe 61 50 5e 45
```

(5) Creates message

```
IKE SA Init  
9280E0822E758778.0000000000000000.00000000 IKEv2 R<-I[328]  
SA[52]{  
    P[48](#1:IKE::5#){  
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
        ENCR_MAGMA_MGM_KTREE,  
        PRF=PRF_HMAC_STREEBOG_512,  
        KE=GOST3410_2012_512,  
        GOST3410_2012_256}}},  
    KE[136](GOST3410_2012_512){8977C6...505E45},  
    NONCE[36]{9844D5...CC011F},  
    N[28](NAT_DETECTION_SOURCE_IP){000000...000000},  
    N[28](NAT_DETECTION_DESTINATION_IP){7D2124...4E6F10},  
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),  
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}}
```

(6) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [328]

```
00000000: 92 80 e0 82 2e 75 87 78 00 00 00 00 00 00 00 00  
00000010: 21 20 22 08 00 00 00 00 00 00 01 48 22 00 00 34  
00000020: 00 00 00 30 01 01 00 05 03 00 00 08 01 00 00 20  
00000030: 03 00 00 08 01 00 00 21 03 00 00 08 02 00 00 09  
00000040: 03 00 00 08 04 00 00 22 00 00 00 08 04 00 00 21  
00000050: 28 00 00 88 00 22 00 00 89 77 c6 d7 2b 08 5d d5  
00000060: 48 b1 ea 5d 99 c5 03 09 c6 62 fe d7 7d 84 a4 d8  
00000070: 8b 9b a5 c8 3a 7a 05 86 e2 0d 8d 9b 5d ce 01 18  
00000080: e2 d2 da 73 83 ee 30 ad 49 88 44 6f bd 18 78 b4  
00000090: bb da c9 df 1a ca d1 2a 05 98 75 da 9e 9a 21 e4  
000000A0: db 71 8f af d1 96 c7 8b de 9a b2 98 f7 55 bb 74  
000000B0: 38 34 a4 da 47 ab 86 15 d4 c8 33 70 b7 02 79 b8  
000000C0: 7f c2 97 6d 03 8f 2d 08 d7 ab ac 85 4c bf 5a f6  
000000D0: 27 57 ad fe 61 50 5e 45 29 00 00 24 98 44 d5 40  
000000E0: ef 89 46 f4 55 20 0a 55 73 dc ad 73 dd 2a 6f a8  
000000F0: 31 f8 49 05 f5 8e 17 a2 6c cc 01 1f 29 00 00 1c  
00000100: 00 00 40 04 00 00 00 00 00 00 00 00 00 00 00 00  
00000110: 00 00 00 00 00 00 00 29 00 00 1c 00 00 40 05  
00000120: 7d 21 24 87 89 d7 95 71 bd a2 2d 22 9d 51 d0 71  
00000130: e9 4e 6f 10 29 00 00 08 00 00 40 2e 00 00 00 0c  
00000140: 00 00 40 2f 00 06 00 07
```

Responder's actions:

(7) Parses received message

```
IKE SA Init  
9280E0822E758778.0000000000000000.00000000 IKEv2 I->R[328]  
SA[52]{  
    P[48](#1:IKE::5#){  
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
        ENCR_MAGMA_MGM_KTREE,  
        PRF=PRF_HMAC_STREEBOG_512,  
        KE=GOST3410_2012_512,  
        GOST3410_2012_256},  
    KE[136](GOST3410_2012_512){8977C6...505E45},  
    NONCE[36]{9844D5...CC011F},  
    N[28](NAT_DETECTION_SOURCE_IP){000000...000000},  
    N[28](NAT_DETECTION_DESTINATION_IP){7D2124...4E6F10},  
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),  
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}
```

(8) Creates message

```
IKE SA Init  
9280E0822E758778.0000000000000000.00000000 IKEv2 I=<R[38]  
N[10](INVALID_KE_PAYLOAD){GOST3410_2012_256}
```

(9) Sends message, peer receives message

```
10.111.10.171:54294<-10.111.15.45:500 [38]
```

```
00000000: 92 80 e0 82 2e 75 87 78 00 00 00 00 00 00 00 00  
00000010: 29 20 22 20 00 00 00 00 00 00 00 00 26 00 00 00 0a  
00000020: 00 00 00 11 00 21
```

Initiator's actions:

(10) Parses received message

```
IKE SA Init  
9280E0822E758778.0000000000000000.00000000 IKEv2 R=>I[38]  
N[10](INVALID_KE_PAYLOAD){GOST3410_2012_256}
```

(11) Generates ephemeral private key (256 bit)

```
00000000: b9 7c ac df 01 43 44 dd 54 92 33 63 4a 6e da 64  
00000010: 38 5b 6a 9c c0 3c 6c 41 c5 02 eb 63 d1 e6 24 21
```

(12) Computes public key

```
00000000: 7d b0 49 81 88 6d 1b 02 b2 a6 35 c5 8b ea 90 8c
00000010: 3e 16 de e5 43 13 22 0b ad f5 89 9f 7f 85 54 2d
00000020: 3e db 1e de 85 f7 d5 5d 6f 83 c5 d0 31 bd 31 49
00000030: dd 29 c5 16 16 7d ec 86 16 d8 85 e6 e4 50 ab 46
```

(13) Creates message

```
IKE SA Init
9280E0822E758778.0000000000000000.00000000 IKEv2 R<-I[264]
SA[52]{
    P[48](#1:IKE::5#){
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
        ENCR_MAGMA_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_512,
        GOST3410_2012_256} },
    KE[72](GOST3410_2012_256){7DB049...50AB46},
    NONCE[36]{9844D5...CC011F},
    N[28](NAT_DETECTION_SOURCE_IP){000000...000000},
    N[28](NAT_DETECTION_DESTINATION_IP){7D2124...4E6F10},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}
```

(14) Sends message, peer receives message

10.111.10.171:54294->10.111.15.45:500 [264]

```
00000000: 92 80 e0 82 2e 75 87 78 00 00 00 00 00 00 00 00  
00000010: 21 20 22 08 00 00 00 00 00 00 01 08 22 00 00 34  
00000020: 00 00 00 30 01 01 00 05 03 00 00 08 01 00 00 20  
00000030: 03 00 00 08 01 00 00 21 03 00 00 08 02 00 00 09  
00000040: 03 00 00 08 04 00 00 22 00 00 00 08 04 00 00 21  
00000050: 28 00 00 48 00 21 00 00 7d b0 49 81 88 6d 1b 02  
00000060: b2 a6 35 c5 8b ea 90 8c 3e 16 de e5 43 13 22 0b  
00000070: ad f5 89 9f 7f 85 54 2d 3e db 1e de 85 f7 d5 5d  
00000080: 6f 83 c5 d0 31 bd 31 49 dd 29 c5 16 16 7d ec 86  
00000090: 16 d8 85 e6 e4 50 ab 46 29 00 00 24 98 44 d5 40  
000000A0: ef 89 46 f4 55 20 0a 55 73 dc ad 73 dd 2a 6f a8  
000000B0: 31 f8 49 05 f5 8e 17 a2 6c cc 01 1f 29 00 00 1c  
000000C0: 00 00 40 04 00 00 00 00 00 00 00 00 00 00 00 00  
000000D0: 00 00 00 00 00 00 00 29 00 00 1c 00 00 40 05  
000000E0: 7d 21 24 87 89 d7 95 71 bd a2 2d 22 9d 51 d0 71  
000000F0: e9 4e 6f 10 29 00 00 08 00 00 40 2e 00 00 00 0c  
00000100: 00 00 40 2f 00 06 00 07
```

Responder's actions:

(15) Parses received message

```
IKE SA Init  
9280E0822E758778.0000000000000000.00000000 IKEv2 I->R[264]  
SA[52]{  
    P[48](#1:IKE::5#){  
        Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  
        ENCR_MAGMA_MGM_KTREE,  
        PRF=PRF_HMAC_STREEBOG_512,  
        KE=GOST3410_2012_512,  
        GOST3410_2012_256},  
    KE[72](GOST3410_2012_256){7DB049...50AB46},  
    NONCE[36]{9844D5...CC011F},  
    N[28](NAT_DETECTION_SOURCE_IP){000000...000000},  
    N[28](NAT_DETECTION_DESTINATION_IP){7D2124...4E6F10},  
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),  
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}
```

(16) Generates random SPIr for IKE SA

00000000: db 57 8d 97 de 11 9d 1e

(17) Generates random IKE nonce Nr

00000000: 6c de 24 c1 2c 0a 10 d5 c3 fe 55 e8 7e 90 30 66
00000010: ee 54 5b 24 1c 3c 01 dd b3 98 06 ae d3 b5 00 48

(18) Generates ephemeral private key

00000000: 46 fd 19 da 1c 77 e8 4c 12 69 cf c8 a2 2a 0b e9
00000010: 70 db c1 2c 9f 6d 88 0a 70 71 22 03 68 c6 fd 2d

(19) Computes public key

00000000: 49 c2 40 f6 ac 35 f1 70 a7 c2 37 5e 9a 78 3c 09
00000010: 59 8d 55 3b 30 5b 64 58 db 2f 3c 36 f4 b1 db ad
00000020: ff c8 f4 b2 bd 14 cf 96 5b b2 d6 80 51 69 67 06
00000030: bd 16 39 0e 6d 07 83 e4 9d ed fd 04 f1 9e 07 a2

(20) Computes hash of CA public key

00000000: 5e 9e 50 5f 58 b0 a5 7a 33 45 83 49 66 0f 1c 3c
00000010: 7a 67 71 98

(21) Creates message

```

IKE SA Init
9280E0822E758778.DB578D97DE119D1E.00000000 IKEv2 I<=R[273]
SA[36]{
    P[32](#1:IKE::3#){
        Encryption=ENCR_MAGMA_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_256},
    KE[72](GOST3410_2012_256){49C240...9E07A2},
    NONCE[36]{6CDE24...B50048},
    N[28](NAT_DETECTION_SOURCE_IP){A4DCA3...2F5B3F},
    N[28](NAT_DETECTION_DESTINATION_IP){BA7D7A...7AB7C9},
    CERTREQ[25](X.509 Cert){5E9E50...677198},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}

```

(22) Sends message, peer receives message

10.111.10.171:54294<-10.111.15.45:500 [273]

```

00000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
00000010: 21 20 22 20 00 00 00 00 00 00 01 11 22 00 00 24
00000020: 00 00 00 20 01 01 00 03 03 00 00 08 01 00 00 21
00000030: 03 00 00 08 02 00 00 09 00 00 00 08 04 00 00 21
00000040: 28 00 00 48 00 21 00 00 49 c2 40 f6 ac 35 f1 70
00000050: a7 c2 37 5e 9a 78 3c 09 59 8d 55 3b 30 5b 64 58
00000060: db 2f 3c 36 f4 b1 db ad ff c8 f4 b2 bd 14 cf 96
00000070: 5b b2 d6 80 51 69 67 06 bd 16 39 0e 6d 07 83 e4
00000080: 9d ed fd 04 f1 9e 07 a2 29 00 00 24 6c de 24 c1
00000090: 2c 0a 10 d5 c3 fe 55 e8 7e 90 30 66 ee 54 5b 24
000000A0: 1c 3c 01 dd b3 98 06 ae d3 b5 00 48 29 00 00 1c
000000B0: 00 00 40 04 a4 dc a3 62 54 e8 4b 53 2b ff e7 d2
000000C0: 26 83 f3 8f 28 2f 5b 3f 26 00 00 1c 00 00 40 05
000000D0: ba 7d 7a b8 48 82 72 f6 30 91 b6 ae 2b dd fb 48
000000E0: ba 7a b7 c9 29 00 00 19 04 5e 9e 50 5f 58 b0 a5
000000F0: 7a 33 45 83 49 66 0f 1c 3c 7a 67 71 98 29 00 00
00000100: 08 00 00 40 2e 00 00 00 0c 00 00 40 2f 00 06 00
00000110: 07

```

Initiator's actions:

(23) Parses received message

```

IKE SA Init
9280E0822E758778.DB578D97DE119D1E.00000000 IKEv2 R=>I[273]
SA[36]{
    P[32](#1:IKE::3#){
        Encryption=ENCR_MAGMA_MGM_KTREE,
        PRF=PRF_HMAC_STREEBOG_512,
        KE=GOST3410_2012_256} },
    KE[72](GOST3410_2012_256){49C240...9E07A2},
    NONCE[36]{6CDE24...B50048},
    N[28](NAT_DETECTION_SOURCE_IP){A4DCA3...2F5B3F},
    N[28](NAT_DETECTION_DESTINATION_IP){BA7D7A...7AB7C9},
    CERTREQ[25](X.509 Cert){5E9E50...677198},
    N[8](IKEV2_FRAGMENTATION_SUPPORTED),
    N[12](SIGNATURE_HASH_ALGORITHMS){STREEBOG_256, STREEBOG_512}

```

(24) Computes shared key

```

00000000: bd 04 9d 0f 9c 5f 58 af c7 e4 01 bc 18 59 01 7c
00000010: 88 28 f9 f2 9f 33 01 5d 49 9a 7d 14 74 d4 31 ac

```

(25) Computes SKEYSEED

```

00000000: 9b ed 6c 79 64 b3 de 3a e4 9e dd 62 04 5a f0 8b
00000010: 43 88 33 d4 e6 9e 73 16 a1 1a 9e b2 b4 19 13 c5
00000020: d0 6d fb 86 40 11 c3 02 bb e5 a3 b5 e4 4a c4 c0
00000030: 9d 18 c6 94 de c3 c5 14 82 e7 a2 51 fe c4 98 ca

```

(26) Computes SK_d

```

00000000: c2 21 15 fd d3 99 3b 2a 43 60 c4 59 34 b0 be 3f
00000010: 53 ef 6e b1 dd 88 ad 72 55 dd 83 22 5c 6f e1 d6
00000020: 1f 1e ab 06 f9 41 cb c8 ea f9 dc fc 19 a0 2d bf
00000030: 9a 0a 3f 3a 9a 45 1f 08 b6 a9 2c 62 52 b7 26 34

```

(27)

Computes SK_ei

```
00000000: 18 4e 4e 0f 36 28 bf 3c 9c 04 8e 93 bf a0 77 53  
00000010: 91 34 12 81 42 e6 4e 62 7f db a5 ed 98 60 50 ff  
00000020: b4 e1 3e 23
```

(28) Computes SK_er

```
00000000: e9 27 59 2f 09 49 68 1e 0e 62 db c6 19 06 73 13  
00000010: cf da 5c 02 27 3e 4a b4 78 98 b4 86 d0 e9 34 f4  
00000020: a5 bb 18 2f
```

(29) Computes SK_pi

```
00000000: 30 2c 10 8d 0f 61 47 00 f1 40 4f a9 4f af b5 30  
00000010: 11 ba 5f 24 39 32 85 12 4e 7e 71 75 50 15 a6 93  
00000020: c3 d0 5e 40 2e 21 8e b1 59 09 cd a4 eb b4 91 68  
00000030: 29 42 fe e2 d8 76 8f a6 96 55 1f ab 6c 9b 00 f8
```

(30) Computes SK_pr

```
00000000: 6f 81 72 cb 96 58 fb 0e 17 70 b6 b9 1f a9 69 a9  
00000010: fc c7 27 4f b4 e1 85 90 a0 c7 9f f9 72 11 61 2a  
00000020: 35 b7 b7 96 d3 6a bb a5 aa b1 b8 34 8d 99 c6 f3  
00000030: 2b fc 32 56 c1 94 71 04 55 bd 89 6a bf c3 8b fe
```

(31) Computes prf(SK_pi, IDi)

```
00000000: ce e8 8b d1 7e 3c 83 32 eb d1 29 08 de dc 71 f4  
00000010: 8f ba 09 b8 ca 5b 10 e2 f4 44 29 5c 97 7b 26 01  
00000020: a4 ba 83 c8 ea 40 92 0f 88 18 bd e7 e1 c9 45 cf  
00000030: ff 99 48 05 0d f4 93 a6 cd 54 46 d7 eb 7a 52 94
```

(32) Uses private key for signing (little endian)

```
000000000: 76 E9 DD B3 F3 A2 08 A2 4E A5 81 9C AE 41 DA B4  
000000010: 77 3C 1D D5 DC EB AF E6 58 B1 47 D2 D8 29 CE 71  
000000020: 18 A9 85 5D 28 5B 3C E3 23 BD 80 AC 2F 00 CC B6  
000000030: 61 4C 42 A1 65 61 02 CF 33 EB 1F 5F 02 CE 8A B9
```

(33) Uses random number for signing

```
000000000: 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01  
000000010: 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01  
000000020: 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01  
000000030: 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01
```

(34) Computes signature using algorithm id-tc26-signwithdigest-gost3410-12-512

```
000000000: 6a 3e 59 0d 72 1e 55 a3 c0 d1 2f 8a 9b 4e 44 10  
000000010: 58 59 bd 62 9e e7 12 31 e5 7d 01 53 f3 84 40 dd  
000000020: ac 73 ed 09 3a 10 d9 6e 7f eb 80 6c 11 9e 91 f3  
000000030: 7c 3c b0 55 f7 4b ec 0e 78 36 10 95 02 09 86 b3  
000000040: 27 04 2a 83 3c 89 36 1b 73 cf 7b c9 e0 df a2 07  
000000050: 12 1e 69 52 4d 89 1b de 6e 48 d1 34 fa 21 78 22  
000000060: 88 2e 30 86 c0 80 0a 2d 74 af 08 ff 35 75 a5 79  
000000070: e3 85 40 22 6b a8 42 f6 72 24 bf 29 87 58 a8 20
```

(35) Computes K1i ($i_1 = 0$)

```
000000000: 3c 57 d7 c8 9f 50 98 fc 86 81 d6 8a 4e 5d 83 c6  
000000010: 1e 42 e6 e7 60 67 05 8d f5 2e 10 13 12 15 32 58
```

(36) Computes K2i ($i_2 = 0$)

```
00000000: 0b 88 0a 1b c8 3e 61 79 82 08 db 13 31 08 63 3c  
00000010: 17 62 17 cb 7d 18 ce 70 37 84 85 f4 89 49 d0 06
```

(37) Computes K3i (i3 = 0)

```
00000000: 18 63 41 67 49 6e cf 48 56 71 4d aa 42 63 5c 11  
00000010: 2e 26 5b e2 7b c7 53 a4 09 82 e5 5a 7e f4 65 4d
```

(38) Selects SPI for incoming ESP SA

```
00000000: 6c 0c a5 70
```

(39) Computes hash of CA public key

```
00000000: 5e 9e 50 5f 58 b0 a5 7a 33 45 83 49 66 0f 1c 3c  
00000010: 7a 67 71 98
```

(40) Creates message splitting it into 4 fragments

```

IKE SA Auth
#9280E0822E758778.DB578D97DE119D1E.00000001 IKEv2 R<-I[1847]
E[1819]->4*EF[...]{  

    IDi[78](DN){CN=IKE Interop Test Client,O=ELVIS-PLUS,C=RU},  

    CERT[1280](X.509 Cert){308204...A6C40A},  

    CERTREQ[25](X.509 Cert){5E9E50...677198},  

    IDr[78](DN){CN=IKE Interop Test Server,O=ELVIS-PLUS,C=RU},  

    AUTH[149](Sig){id-tc26-signwithdigest-gost3410-12-512[12]:  

        6A3E59...58A820},  

    N[8](INITIAL_CONTACT),  

    N[12](SET_WINDOW_SIZE){4},  

    CP[16](REQUEST){IP4.Address[0], IP4.DNS[0]},  

    SA[56]{  

        P[52] (#1:ESP:6C0CA570:5#){  

            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,  

            ENCR_MAGMA_MGM_KTREE,  

            ENCR_KUZNYECHIK_MGM_MAC_KTREE,  

            ENCR_MAGMA_MGM_MAC_KTREE,  

            ESN=Off}},  

        TSi[40](2#){10.111.10.171:icmp:8.0, 0.0.0.0-255.255.255.255},  

        TSr[40](2#){10.0.0.2:icmp:8.0, 10.0.0.0-10.0.0.255},  

        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  

        N[8](NON_FIRST_FRAGMENTS_ALSO)}
}

```

(41) Composes MGM nonce (fragment 1)

```
00000000: 00 00 00 00 b4 e1 3e 23
```

(42) Composes AAD (fragment 1)

```
00000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  

00000010: 35 20 23 08 00 00 00 01 00 00 02 20 23 00 02 04  

00000020: 00 01 00 04
```

(43) Composes plaintext (fragment 1)

```
000000000: 25 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06 03
00000010: 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f 70
00000020: 20 54 65 73 74 20 43 6c 69 65 6e 74 31 13 30 11
00000030: 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c 55
00000040: 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 26 00
00000050: 05 00 04 30 82 04 f7 30 82 04 a4 a0 03 02 01 02
00000060: 02 13 7c 00 03 da a8 9e 1e ff 9e 79 05 fb bb 00
00000070: 01 00 03 da a8 30 0a 06 08 2a 85 03 07 01 01 03
00000080: 02 30 82 01 0a 31 18 30 16 06 05 2a 85 03 64 01
00000090: 12 0d 31 32 33 34 35 36 37 38 39 30 31 32 33 31
000000A0: 1a 30 18 06 08 2a 85 03 03 81 03 01 01 12 0c 30
000000B0: 30 31 32 33 34 35 36 37 38 39 30 31 2f 30 2d 06
000000C0: 03 55 04 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83
000000D0: d1 89 d1 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0
000000E0: b2 d0 b0 d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09
000000F0: 06 03 55 04 06 13 02 52 55 31 19 30 17 06 03 55
00000100: 04 08 0c 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba
00000110: d0 b2 d0 b0 31 15 30 13 06 03 55 04 07 0c 0c d0
00000120: 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06
00000130: 03 55 04 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a
00000140: d0 a0 d0 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0
00000150: 9e 22 31 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0
00000160: b5 d1 81 d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3
00000170: d0 a6 20 d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000180: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30
00000190: 1e 17 0d 32 31 31 30 30 31 30 36 31 30 31 30 5a
000001A0: 17 0d 32 32 30 31 30 31 30 36 32 30 31 30 5a 30
000001B0: 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45 20
000001C0: 49 6e 74 65 72 6f 70 20 54 65 73 74 20 43 6c 69
000001D0: 65 6e 74 31 13 30 11 06 03 55 04 0a 13 0a 45 4c
000001E0: 56 49 53 2d 50 4c 55 53 31 0b 30 00
```

- (44) Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext (fragment 1)

```
00000000: 03 45 60 11 15 25 f5 45 bb 0e f4 25 26 e2 14 8c
00000010: a7 01 82 f6 9c 6e 42 f1 a3 9b 9e ac a6 dd 0d 9c
00000020: ff 79 15 ed b9 0c 81 a0 b4 29 61 fb 55 1b c1 73
00000030: 4d de 1f b2 5f 1f cb 84 5d 12 24 85 52 c4 f2 1d
00000040: 01 a7 92 ad 55 4d 90 d0 58 d2 1a 5e f6 dc 4e 73
00000050: d4 9b 08 66 d7 64 de 10 e6 75 69 20 e3 7b 6c f0
00000060: 4b 8b ff 60 39 f1 19 31 72 dd c1 09 33 5b 1d 56
00000070: ee 0c 1c 42 d7 f3 04 d3 5b 9a 6e cf 7f b3 1f ac
00000080: 34 a6 ee e0 ac 87 b8 88 99 75 a6 ae dc b5 30 38
00000090: eb 3d 48 fd cc 69 64 f8 c6 61 ce e9 e1 24 ba aa
000000A0: 25 5e e6 ea 8b 0c ef 20 31 bf a9 ae 6d e2 82 d4
000000B0: ab 2c d7 af ca 62 fe bd 7c 8f a9 dc d3 63 05 d7
000000C0: ba 92 56 66 44 ad 5d 9d 1e 9a 27 2e 22 6e 5b 0c
000000D0: af 84 6b c6 a7 cf ca 72 f8 8e d3 a1 bc d4 7c 5b
000000E0: 7e 26 7f b3 05 d8 62 ef ad d6 07 70 d7 4b 33 e4
000000F0: 26 84 e6 eb 5b 65 5c a7 71 29 45 15 d9 b0 83 6a
00000100: 52 5f a9 d8 dd f1 d8 62 c7 d7 3d e9 69 0e c5 b1
00000110: e1 de 20 6c 3d 5f f7 9f f6 a5 7b 4d a5 4e e9
00000120: b4 c4 c2 7d cc 43 62 77 57 37 d3 40 48 b2 c0 5b
00000130: 48 ab d0 94 79 ef 3d 04 e3 d8 6d 42 56 ed cd 94
00000140: b4 23 2c fa f0 6b 39 ad 41 a3 b3 8f ec b8 6c ef
00000150: e1 98 3a b2 fb a8 fd 21 96 8a bf 3a 65 47 8a e9
00000160: 69 60 44 02 2c ec 7a 86 74 fe 1d 9b 08 5e b8 5e
00000170: f8 ca 37 20 5f a7 74 8c 12 88 f2 d8 9e d4 94 29
00000180: c2 db f9 fb 35 a0 cf 21 2b da 8b 9e cc 52 84 eb
00000190: c4 12 39 3e e6 18 fb f7 57 6c b5 1e 10 3d 11 9c
000001A0: 29 9c 41 73 69 d8 d0 9d 71 2b 77 66 87 65 51 19
000001B0: db 27 a0 dd aa 64 ba fd c0 5f e1 4e da 7c 20 fc
000001C0: 8c 13 ab 2d c2 9c 37 9d 7e 51 cb 29 03 10 52 dc
000001D0: f8 09 61 cc 12 9a a0 8e 1b e4 52 f8 72 bd 7a 86
000001E0: db 93 7c 55 b8 1e 7f 21 d4 e6 02 f2
```

(45) Computes ICV using K3i as K_msg (fragment 1)

```
00000000: b1 51 cd e6 dc 64 12 1c
```

(46) Composes IV (fragment 1)

```
00000000: 00 00 00 00 00 00 00 00
```

(47) Composes MGM nonce (fragment 2)

000000000: 00 00 00 01 b4 e1 3e 23

(48) Composes AAD (fragment 2)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 08 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 02 00 04

(49) Composes plaintext (fragment 2)

```
000000000: 09 06 03 55 04 06 13 02 52 55 30 81 aa 30 21 06
00000010: 08 2a 85 03 07 01 01 01 02 30 15 06 09 2a 85 03
00000020: 07 01 02 01 02 01 06 08 2a 85 03 07 01 01 02 03
00000030: 03 81 84 00 04 81 80 ee 2f 0a 0e 09 1e 7e 04 ef
00000040: ba 5b 62 a2 52 86 e1 9c 24 50 30 50 b0 b4 8a 37
00000050: 35 b5 fc af 28 94 ec b5 9b 92 41 5b 69 e2 c9 ba
00000060: 24 de 6a 72 c4 ef 44 bb 89 a1 05 14 1b 87 3d 6a
00000070: a3 72 3e 17 ca 7f 39 28 ce 16 8b dd 07 52 87 6a
00000080: 0d 77 42 6d 99 2b 46 2c fd 4b b2 7c d7 c7 17 08
00000090: 12 54 63 47 9d 14 3d 61 ed f2 95 ab 11 80 69 02
000000A0: a7 66 60 50 7e a4 53 6d ad 01 49 b2 16 8a 95 1d
000000B0: cf 1a 57 93 56 14 5e a3 82 02 59 30 82 02 55 30
000000C0: 0e 06 03 55 1d 0f 01 01 ff 04 04 03 02 05 a0 30
000000D0: 13 06 03 55 1d 25 04 0c 30 0a 06 08 2b 06 01 05
000000E0: 05 07 03 11 30 1d 06 03 55 1d 0e 04 16 04 14 40
000000F0: 81 b1 d1 18 75 f0 da 6b 3c 50 5f cd 73 1d d9 77
00000100: f2 d7 c1 30 1f 06 03 55 1d 23 04 18 30 16 80 14
00000110: 9b 85 5e fb 81 dc 4d 59 07 51 63 cf be df da 2c
00000120: 7f c9 44 3c 30 82 01 0f 06 03 55 1d 1f 04 82 01
00000130: 06 30 82 01 02 30 81 ff a0 81 fc a0 81 f9 86 81
00000140: b5 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74
00000150: 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72
00000160: 75 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 21 30 34
00000170: 32 32 21 30 34 33 35 21 30 34 34 31 21 30 34 34
00000180: 32 21 30 34 33 65 21 30 34 33 32 21 30 34 34 62
00000190: 21 30 34 33 39 25 32 30 21 30 34 32 33 21 30 34
000001A0: 32 36 25 32 30 21 30 34 31 65 21 30 34 31 65 21
000001B0: 30 34 31 65 25 32 30 21 30 30 32 32 21 30 34 31
000001C0: 61 21 30 34 32 30 21 30 34 31 38 21 30 34 31 66
000001D0: 21 30 34 32 32 21 30 34 31 65 2d 21 30 34 31 66
000001E0: 21 30 34 32 30 21 30 34 31 65 21 00
```

- (50) Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext (fragment 2)

```
00000000: 3c b1 b4 aa 04 56 27 1b 45 04 f7 70 1b 17 16 16  
00000010: 85 16 ee b3 88 7d 08 64 2d 24 b8 1d 7e ac c9 72  
00000020: 73 07 d3 d9 ef 5d 08 8b 47 97 5a 98 53 00 ec 13  
00000030: cc 5a 46 7b 16 a2 14 6a f1 ea 17 71 9b 75 1d 46  
00000040: 9d 6d 8c 3a a2 b2 75 c5 c9 4c 16 56 73 03 16 40  
00000050: 42 fe a2 5a cc c7 ed 37 91 b1 eb e5 56 2a 01 bc  
00000060: a2 83 ac 05 f1 a7 56 e5 f2 bb f4 18 7f 05 82 14  
00000070: 70 de af 44 d4 cc a9 0a 95 6d c1 96 11 3d cf e1  
00000080: aa 27 f1 87 60 d2 32 c1 1e 91 bf 60 00 5f d3 fb  
00000090: a4 55 2e f0 0b 08 14 ed a3 63 54 4c b8 7b 5c 71  
000000A0: 69 d1 3b 0c 6c 93 f3 99 2e fe 36 98 90 a1 05 ee  
000000B0: 35 d2 da f8 81 59 f5 17 23 33 40 99 99 42 37 b0  
000000C0: 0d 94 0a bd 00 cf 1c be 0e d0 13 93 e2 27 5a a5  
000000D0: c5 e8 a0 25 5a 2d ad 6c b4 bc 64 37 05 ac cd 22  
000000E0: 92 13 83 ab e8 87 93 29 82 dc 47 b4 1c 92 4d 36  
000000F0: ef ba 10 3d 42 2d d6 2c d5 6b 95 99 2d 17 61 c4  
00000100: c5 13 ed 55 a5 e5 b2 65 ac 25 24 21 c4 25 7f 6f  
00000110: 68 fb ce 8f 17 60 e9 ac 9c 52 9f d5 d4 a7 14 35  
00000120: 89 a4 1f de 21 a9 51 3c 1d 73 00 10 ba a6 7c 24  
00000130: fb b9 20 21 5e df 63 8a c8 1f b1 55 05 5a 70 a8  
00000140: b5 f4 23 9e 22 c0 2a 7c a5 11 01 c3 5e 3d 52 2a  
00000150: b8 1d c5 19 b5 55 cc 8e f0 8d 6e 93 36 10 cd e3  
00000160: c8 a5 a6 2e 90 53 fa 92 64 16 6c 4f da 9b e5 f8  
00000170: 91 c5 ea b4 60 64 db ed d5 bc fc 3a 73 62 ce b2  
00000180: ff 7a 15 95 0d 77 00 ee 5c a8 c5 89 2f 39 13 59  
00000190: dd 52 ea 11 ae 28 82 36 be aa 29 68 4c f6 63 d5  
000001A0: 93 a5 54 3d 8f 13 26 0a 87 34 b9 81 1c 2c cd d5  
000001B0: 79 3a 65 6d 1c 6e 32 be b0 77 b7 b3 e4 ae b8 72  
000001C0: f9 44 59 e9 14 46 67 56 93 ca 70 d1 ac 25 05 62  
000001D0: f7 55 c2 9e 2e 11 a7 29 01 24 77 4a 6f 1c ba f6  
000001E0: 4a 4f 83 75 29 1e c7 a9 68 29 02 d0
```

(51) Computes ICV using K3i as K_msg (fragment 2)

```
00000000: b4 68 c7 4d eb dd bd 92
```

(52) Composes IV (fragment 2)

```
00000000: 00 00 00 00 00 00 00 01
```

(53) Composes MGM nonce (fragment 3)

```
000000000: 00 00 00 02 b4 e1 3e 23
```

(54) Composes AAD (fragment 3)

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 35 20 23 08 00 00 00 01 00 00 02 20 00 00 02 04  
000000020: 00 03 00 04
```

(55) Composes plaintext (fragment 3)

```
000000000: 30 30 32 32 28 31 29 2e 63 72 6c 86 3f 68 74 74
00000010: 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32
00000020: 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65
00000030: 72 74 45 6e 72 6f 6c 6c 2f 74 65 73 74 67 6f 73
00000040: 74 32 30 31 32 28 31 29 2e 63 72 6c 30 81 da 06
00000050: 08 2b 06 01 05 05 07 01 01 04 81 cd 30 81 ca 30
00000060: 44 06 08 2b 06 01 05 05 07 30 02 86 38 68 74 74
00000070: 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32
00000080: 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65
00000090: 72 74 45 6e 72 6f 6c 6c 2f 72 6f 6f 74 32 30 31
000000A0: 38 2e 63 72 74 30 3f 06 08 2b 06 01 05 05 07 30
000000B0: 01 86 33 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f
000000C0: 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f
000000D0: 2e 72 75 2f 6f 63 73 70 32 30 31 32 67 2f 6f 63
000000E0: 73 70 2e 73 72 66 30 41 06 08 2b 06 01 05 05 07
000000F0: 30 01 86 35 68 74 74 70 3a 2f 2f 74 65 73 74 67
00000100: 6f 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72
00000110: 6f 2e 72 75 2f 6f 63 73 70 32 30 31 32 67 73 74
00000120: 2f 6f 63 73 70 2e 73 72 66 30 0a 06 08 2a 85 03
00000130: 07 01 01 03 02 03 41 00 21 ee 3b e1 fd 0f 36 90
00000140: 92 c4 a2 35 26 e8 dc 4e b8 ef 89 40 70 d2 91 39
00000150: bc 79 a6 e2 f7 c1 06 bd d5 d6 ff 72 a5 6c f2 c0
00000160: c3 75 e9 ca 67 81 c1 93 96 b4 bd 18 12 4c 37 f7
00000170: d9 73 d6 4c 8a a6 c4 0a 24 00 00 19 04 5e 9e 50
00000180: 5f 58 b0 a5 7a 33 45 83 49 66 0f 1c 3c 7a 67 71
00000190: 98 27 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06
000001A0: 03 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f
000001B0: 70 20 54 65 73 74 20 53 65 72 76 65 72 31 13 30
000001C0: 11 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c
000001D0: 55 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 29
000001E0: 00 00 95 0e 00 00 00 0c 30 0a 06 00
```

- (56)** Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext (fragment 3)

```
00000000: e7 72 d9 51 90 b1 a2 bc 81 8d d6 56 bf 7a 81 e0
00000010: 1a a1 70 8b 35 a0 7e 5f e8 df 58 3d 75 5d d2 4c
00000020: 4c ce 17 77 3f 28 9c ca 7a a4 23 23 f0 c7 ff ff
00000030: 98 ee e3 1a 27 39 4d 90 1a b7 5b 44 11 16 11 3a
00000040: ea bf 83 66 da 92 2a 3a 3d bd b5 40 c8 bc f6 ed
00000050: cb 1d 5a 8e 30 f0 06 72 dc 6c da c1 45 7b e8 25
00000060: ca 93 2a b2 fe 4a db 00 90 e3 31 78 26 8d ae c8
00000070: 39 66 80 7d e5 01 5f 21 d6 c3 40 46 19 e4 43 9d
00000080: 23 c6 c1 18 06 49 bd f5 dc 8c 1b 19 b0 60 0c a3
00000090: ad f5 5c 57 e8 8e 37 e6 ea b6 79 11 b8 f1 16 ba
000000A0: a6 d9 09 1f 0d e0 3c 07 b8 ce 9d 11 a3 c6 f7 e4
000000B0: 62 e8 94 7b ad b9 8a 6b 9c f1 f8 43 cf 7e fc 5e
000000C0: 44 ab bf b1 88 f5 67 1e 84 5f 82 63 f3 13 89 55
000000D0: f5 ef 86 c3 db 48 37 f8 26 3c c4 6d a5 fc b5 69
000000E0: 56 0d 2d f3 c0 98 dd e7 53 da 0a 28 87 2f 38 ab
000000F0: a9 ec 60 a6 c4 54 c6 68 e7 6b e3 4b 54 bf b5 82
00000100: 44 c9 b9 45 bc 9e f5 58 d8 76 63 92 cd 52 ec 82
00000110: 80 d6 43 86 10 16 eb 7b 32 e4 ee ba ec 09 b6 4f
00000120: 35 1a bf da d7 de 40 fa b5 d2 40 f2 73 09 2d 52
00000130: 83 bd 56 a6 6b d3 9f 8a c2 c5 66 c6 6b 22 fb 6a
00000140: 00 b2 8a ac 9d 8b fc 8d 41 af 80 92 16 51 e2 cb
00000150: 89 62 9b 77 2b 1e 38 01 df fc 1f 81 2d 95 8b 9e
00000160: 1d 1e ad 9c c0 0d fc 77 6e 35 13 16 26 28 1a 29
00000170: 19 7f f8 08 5a 0f 09 4f 6f ba 7f 4c 5b cd 0c c2
00000180: 71 ab ea 82 a2 d2 d1 1b 17 fd dc c3 54 03 85 14
00000190: f4 90 47 2e 67 d7 93 c3 67 7e 8a f7 43 1a b3 41
000001A0: 32 f7 b0 58 38 6e 24 c8 96 d9 94 d3 54 89 2d 61
000001B0: 10 a9 9c 22 51 52 02 c9 b7 8d cc 5b 28 6d cb 55
000001C0: 5d 2f 97 8a 8f 3f 27 56 73 eb ec 5d e4 64 91 49
000001D0: 3b 88 f2 0a fc ed a5 67 a9 e3 71 ef 31 ce a0 33
000001E0: fc d8 ea 4d 1e 3f dc 89 c8 89 e2 c3
```

(57) Computes ICV using K3i as K_msg (fragment 3)

```
00000000: 54 4f 9b aa dd af bd ca
```

(58) Composes IV (fragment 3)

```
00000000: 00 00 00 00 00 00 00 02
```

(59) Composes MGM nonce (fragment 4)

```
0000000000: 00 00 00 03 b4 e1 3e 23
```

(60) Composes AAD (fragment 4)

```
0000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 35 20 23 08 00 00 00 01 00 00 01 7a 00 00 01 5e  
000000020: 00 04 00 04
```

(61) Composes plaintext (fragment 4)

```
0000000000: 08 2a 85 03 07 01 01 03 03 6a 3e 59 0d 72 1e 55  
000000010: a3 c0 d1 2f 8a 9b 4e 44 10 58 59 bd 62 9e e7 12  
000000020: 31 e5 7d 01 53 f3 84 40 dd ac 73 ed 09 3a 10 d9  
000000030: 6e 7f eb 80 6c 11 9e 91 f3 7c 3c b0 55 f7 4b ec  
000000040: 0e 78 36 10 95 02 09 86 b3 27 04 2a 83 3c 89 36  
000000050: 1b 73 cf 7b c9 e0 df a2 07 12 1e 69 52 4d 89 1b  
000000060: de 6e 48 d1 34 fa 21 78 22 88 2e 30 86 c0 80 0a  
000000070: 2d 74 af 08 ff 35 75 a5 79 e3 85 40 22 6b a8 42  
000000080: f6 72 24 bf 29 87 58 a8 20 29 00 00 08 00 00 40  
000000090: 00 2f 00 00 0c 00 00 40 01 00 00 00 04 21 00 00  
0000000A0: 10 01 00 00 00 00 01 00 00 00 03 00 00 2c 00 00  
0000000B0: 38 00 00 00 34 01 03 04 05 6c 0c a5 70 03 00 00  
0000000C0: 08 01 00 00 20 03 00 00 08 01 00 00 21 03 00 00  
0000000D0: 08 01 00 00 22 03 00 00 08 01 00 00 23 00 00 00  
0000000E0: 08 05 00 00 00 2d 00 00 28 02 00 00 00 07 01 00  
0000000F0: 10 08 00 08 00 0a 6f 0a ab 0a 6f 0a ab 07 00 00  
000000100: 10 00 00 ff ff 00 00 00 00 ff ff ff ff 29 00 00  
000000110: 28 02 00 00 00 07 01 00 10 08 00 08 00 0a 00 00  
000000120: 02 0a 00 00 02 07 00 00 10 00 00 ff ff 0a 00 00  
000000130: 00 0a 00 00 ff 29 00 00 08 00 00 40 0a 00 00 00  
000000140: 08 00 00 40 0b 00
```

(62) Encrypts plaintext using K3i as K_msg, resulted in ciphertext (fragment 4)

```
00000000: e0 8a 0b 04 ee f8 47 c2 52 96 71 9f 9d 39 0c 91
00000010: ea 6a 16 7c 80 31 a0 fd 76 cc c4 f1 8f 1a d3 be
00000020: fa 78 6b df c1 c6 73 83 be 36 69 c4 8a 87 ed 11
00000030: 90 31 a8 fd f9 0a 5c e4 d4 23 c9 e6 b3 96 ac b6
00000040: 8e bd fc 27 58 79 9f cc 8b ac 6b 59 e4 70 4b 05
00000050: 23 16 ed 49 25 f3 de 02 2e ce ae 86 e8 b4 ca b4
00000060: 96 ad 5b f6 2b c2 47 33 6f da f3 97 3c 13 ed 1f
00000070: 7a da 93 b5 69 6a b5 10 93 38 75 ea b7 34 a3 87
00000080: b6 83 c7 da 8a a1 d9 2a 0b 22 e2 ab 63 2b 57 2b
00000090: 88 e3 ea be 7b fc dc 26 ac b8 bb 15 96 f9 c2 f4
000000A0: 60 17 e4 09 18 ae 78 b8 73 02 6b 0e 20 cc b1 cd
000000B0: b4 4d 94 7f f3 16 28 9a d2 bd 26 77 4b a5 85 56
000000C0: b1 81 8b 9c c3 0a 7f 67 fe 6a 61 15 f1 45 66 f3
000000D0: 36 fc a5 bb 1f d7 6d e7 1d 9f 3f b5 cc 60 19 48
000000E0: 17 f7 08 28 1c 58 9f 2b 7a 0b b9 50 bd 02 ea b8
000000F0: 1e 03 1f 52 6a 7a fc e5 b4 6b 00 cf 0d 83 1f d2
00000100: 3f f2 ad 43 d4 86 6e c1 88 d2 87 d6 1f ac a3 30
00000110: 7b c1 5b 6a 3d 4c 20 72 5d 2c ca bf 87 a2 ce 1d
00000120: b3 fa c7 7c 22 cd 66 fc be 49 22 32 17 ee 6e 5e
00000130: 62 c1 ca 12 2b 5d 3d 7b ae b5 3e 53 c5 98 05 1f
00000140: 42 53 49 d1 2c c2
```

(63) Computes ICV using K3i as K_msg (fragment 4)

```
00000000: d2 25 f1 d0 38 65 b7 b6
```

(64) Composes IV (fragment 4)

```
00000000: 00 00 00 00 00 00 00 03
```

(65) Sends message fragment (1) , peer receives message fragment (1)

10.111.10.171:54295->10.111.15.45:4500 [548]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 08 00 00 00 01 00 00 02 20
00000020: 23 00 02 04 00 01 00 04 00 00 00 00 00 00 00 00
00000030: 03 45 60 11 15 25 f5 45 bb 0e f4 25 26 e2 14 8c
00000040: a7 01 82 f6 9c 6e 42 f1 a3 9b 9e ac a6 dd 0d 9c
00000050: ff 79 15 ed b9 0c 81 a0 b4 29 61 fb 55 1b c1 73
00000060: 4d de 1f b2 5f 1f cb 84 5d 12 24 85 52 c4 f2 1d
00000070: 01 a7 92 ad 55 4d 90 d0 58 d2 1a 5e f6 dc 4e 73
00000080: d4 9b 08 66 d7 64 de 10 e6 75 69 20 e3 7b 6c f0
00000090: 4b 8b ff 60 39 f1 19 31 72 dd c1 09 33 5b 1d 56
000000A0: ee 0c 1c 42 d7 f3 04 d3 5b 9a 6e cf 7f b3 1f ac
000000B0: 34 a6 ee e0 ac 87 b8 88 99 75 a6 ae dc b5 30 38
000000C0: eb 3d 48 fd cc 69 64 f8 c6 61 ce e9 e1 24 ba aa
000000D0: 25 5e e6 ea 8b 0c ef 20 31 bf a9 ae 6d e2 82 d4
000000E0: ab 2c d7 af ca 62 fe bd 7c 8f a9 dc d3 63 05 d7
000000F0: ba 92 56 66 44 ad 5d 9d 1e 9a 27 2e 22 6e 5b 0c
00000100: af 84 6b c6 a7 cf ca 72 f8 8e d3 a1 bc d4 7c 5b
00000110: 7e 26 7f b3 05 d8 62 ef ad d6 07 70 d7 4b 33 e4
00000120: 26 84 e6 eb 5b 65 5c a7 71 29 45 15 d9 b0 83 6a
00000130: 52 5f a9 d8 dd f1 d8 62 c7 d7 3d e9 69 0e c5 b1
00000140: e1 de 20 6c 3d 5f f7 f7 9f f6 a5 7b 4d a5 4e e9
00000150: b4 c4 c2 7d cc 43 62 77 57 37 d3 40 48 b2 c0 5b
00000160: 48 ab d0 94 79 ef 3d 04 e3 d8 6d 42 56 ed cd 94
00000170: b4 23 2c fa f0 6b 39 ad 41 a3 b3 8f ec b8 6c ef
00000180: e1 98 3a b2 fb a8 fd 21 96 8a bf 3a 65 47 8a e9
00000190: 69 60 44 02 2c ec 7a 86 74 fe 1d 9b 08 5e b8 5e
000001A0: f8 ca 37 20 5f a7 74 8c 12 88 f2 d8 9e d4 94 29
000001B0: c2 db f9 fb 35 a0 cf 21 2b da 8b 9e cc 52 84 eb
000001C0: c4 12 39 3e e6 18 fb f7 57 6c b5 1e 10 3d 11 9c
000001D0: 29 9c 41 73 69 d8 d0 9d 71 2b 77 66 87 65 51 19
000001E0: db 27 a0 dd aa 64 ba fd c0 5f e1 4e da 7c 20 fc
000001F0: 8c 13 ab 2d c2 9c 37 9d 7e 51 cb 29 03 10 52 dc
00000200: f8 09 61 cc 12 9a a0 8e 1b e4 52 f8 72 bd 7a 86
00000210: db 93 7c 55 b8 1e 7f 21 d4 e6 02 f2 b1 51 cd e6
00000220: dc 64 12 1c
```

- (66) Sends message fragment (2) , peer receives message fragment (2)

10.111.10.171:54295->10.111.15.45:4500 [548]

00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 08 00 00 00 01 00 00 02 20
00000020: 00 00 02 04 00 02 00 04 00 00 00 00 00 00 00 01
00000030: 3c b1 b4 aa 04 56 27 1b 45 04 f7 70 1b 17 16 16
00000040: 85 16 ee b3 88 7d 08 64 2d 24 b8 1d 7e ac c9 72
00000050: 73 07 d3 d9 ef 5d 08 8b 47 97 5a 98 53 00 ec 13
00000060: cc 5a 46 7b 16 a2 14 6a f1 ea 17 71 9b 75 1d 46
00000070: 9d 6d 8c 3a a2 b2 75 c5 c9 4c 16 56 73 03 16 40
00000080: 42 fe a2 5a cc c7 ed 37 91 b1 eb e5 56 2a 01 bc
00000090: a2 83 ac 05 f1 a7 56 e5 f2 bb f4 18 7f 05 82 14
000000A0: 70 de af 44 d4 cc a9 0a 95 6d c1 96 11 3d cf e1
000000B0: aa 27 f1 87 60 d2 32 c1 1e 91 bf 60 00 5f d3 fb
000000C0: a4 55 2e f0 0b 08 14 ed a3 63 54 4c b8 7b 5c 71
000000D0: 69 d1 3b 0c 6c 93 f3 99 2e fe 36 98 90 a1 05 ee
000000E0: 35 d2 da f8 81 59 f5 17 23 33 40 99 99 42 37 b0
000000F0: 0d 94 0a bd 00 cf 1c be 0e d0 13 93 e2 27 5a a5
00000100: c5 e8 a0 25 5a 2d ad 6c b4 bc 64 37 05 ac cd 22
00000110: 92 13 83 ab e8 87 93 29 82 dc 47 b4 1c 92 4d 36
00000120: ef ba 10 3d 42 2d d6 2c d5 6b 95 99 2d 17 61 c4
00000130: c5 13 ed 55 a5 e5 b2 65 ac 25 24 21 c4 25 7f 6f
00000140: 68 fb ce 8f 17 60 e9 ac 9c 52 9f d5 d4 a7 14 35
00000150: 89 a4 1f de 21 a9 51 3c 1d 73 00 10 ba a6 7c 24
00000160: fb b9 20 21 5e df 63 8a c8 1f b1 55 05 5a 70 a8
00000170: b5 f4 23 9e 22 c0 2a 7c a5 11 01 c3 5e 3d 52 2a
00000180: b8 1d c5 19 b5 55 cc 8e f0 8d 6e 93 36 10 cd e3
00000190: c8 a5 a6 2e 90 53 fa 92 64 16 6c 4f da 9b e5 f8
000001A0: 91 c5 ea b4 60 64 db ed d5 bc fc 3a 73 62 ce b2
000001B0: ff 7a 15 95 0d 77 00 ee 5c a8 c5 89 2f 39 13 59
000001C0: dd 52 ea 11 ae 28 82 36 be aa 29 68 4c f6 63 d5
000001D0: 93 a5 54 3d 8f 13 26 0a 87 34 b9 81 1c 2c cd d5
000001E0: 79 3a 65 6d 1c 6e 32 be b0 77 b7 b3 e4 ae b8 72
000001F0: f9 44 59 e9 14 46 67 56 93 ca 70 d1 ac 25 05 62
00000200: f7 55 c2 9e 2e 11 a7 29 01 24 77 4a 6f 1c ba f6
00000210: 4a 4f 83 75 29 1e c7 a9 68 29 02 d0 b4 68 c7 4d
00000220: eb dd bd 92

(67) Sends message fragment (3) , peer receives message fragment (3)

10.111.10.171:54295->10.111.15.45:4500 [548]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 08 00 00 00 01 00 00 02 20
00000020: 00 00 02 04 00 03 00 04 00 00 00 00 00 00 00 02
00000030: e7 72 d9 51 90 b1 a2 bc 81 8d d6 56 bf 7a 81 e0
00000040: 1a a1 70 8b 35 a0 7e 5f e8 df 58 3d 75 5d d2 4c
00000050: 4c ce 17 77 3f 28 9c ca 7a a4 23 23 f0 c7 ff ff
00000060: 98 ee e3 1a 27 39 4d 90 1a b7 5b 44 11 16 11 3a
00000070: ea bf 83 66 da 92 2a 3a 3d bd b5 40 c8 bc f6 ed
00000080: cb 1d 5a 8e 30 f0 06 72 dc 6c da c1 45 7b e8 25
00000090: ca 93 2a b2 fe 4a db 00 90 e3 31 78 26 8d ae c8
000000A0: 39 66 80 7d e5 01 5f 21 d6 c3 40 46 19 e4 43 9d
000000B0: 23 c6 c1 18 06 49 bd f5 dc 8c 1b 19 b0 60 0c a3
000000C0: ad f5 5c 57 e8 8e 37 e6 ea b6 79 11 b8 f1 16 ba
000000D0: a6 d9 09 1f 0d e0 3c 07 b8 ce 9d 11 a3 c6 f7 e4
000000E0: 62 e8 94 7b ad b9 8a 6b 9c f1 f8 43 cf 7e fc 5e
000000F0: 44 ab bf b1 88 f5 67 1e 84 5f 82 63 f3 13 89 55
00000100: f5 ef 86 c3 db 48 37 f8 26 3c c4 6d a5 fc b5 69
00000110: 56 0d 2d f3 c0 98 dd e7 53 da 0a 28 87 2f 38 ab
00000120: a9 ec 60 a6 c4 54 c6 68 e7 6b e3 4b 54 bf b5 82
00000130: 44 c9 b9 45 bc 9e f5 58 d8 76 63 92 cd 52 ec 82
00000140: 80 d6 43 86 10 16 eb 7b 32 e4 ee ba ec 09 b6 4f
00000150: 35 1a bf da d7 de 40 fa b5 d2 40 f2 73 09 2d 52
00000160: 83 bd 56 a6 6b d3 9f 8a c2 c5 66 c6 6b 22 fb 6a
00000170: 00 b2 8a ac 9d 8b fc 8d 41 af 80 92 16 51 e2 cb
00000180: 89 62 9b 77 2b 1e 38 01 df fc 1f 81 2d 95 8b 9e
00000190: 1d 1e ad 9c c0 0d fc 77 6e 35 13 16 26 28 1a 29
000001A0: 19 7f f8 08 5a 0f 09 4f 6f ba 7f 4c 5b cd 0c c2
000001B0: 71 ab ea 82 a2 d2 d1 1b 17 fd dc c3 54 03 85 14
000001C0: f4 90 47 2e 67 d7 93 c3 67 7e 8a f7 43 1a b3 41
000001D0: 32 f7 b0 58 38 6e 24 c8 96 d9 94 d3 54 89 2d 61
000001E0: 10 a9 9c 22 51 52 02 c9 b7 8d cc 5b 28 6d cb 55
000001F0: 5d 2f 97 8a 8f 3f 27 56 73 eb ec 5d e4 64 91 49
00000200: 3b 88 f2 0a fc ed a5 67 a9 e3 71 ef 31 ce a0 33
00000210: fc d8 ea 4d 1e 3f dc 89 c8 89 e2 c3 54 4f 9b aa
00000220: dd af bd ca
```

- (68) Sends message fragment (4) , peer receives message fragment (4)

10.111.10.171:54295->10.111.15.45:4500 [382]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 08 00 00 00 01 00 00 01 7a
00000020: 00 00 01 5e 00 04 00 04 00 00 00 00 00 00 00 03
00000030: e0 8a 0b 04 ee f8 47 c2 52 96 71 9f 9d 39 0c 91
00000040: ea 6a 16 7c 80 31 a0 fd 76 cc c4 f1 8f 1a d3 be
00000050: fa 78 6b df c1 c6 73 83 be 36 69 c4 8a 87 ed 11
00000060: 90 31 a8 fd f9 0a 5c e4 d4 23 c9 e6 b3 96 ac b6
00000070: 8e bd fc 27 58 79 9f cc 8b ac 6b 59 e4 70 4b 05
00000080: 23 16 ed 49 25 f3 de 02 2e ce ae 86 e8 b4 ca b4
00000090: 96 ad 5b f6 2b c2 47 33 6f da f3 97 3c 13 ed 1f
000000A0: 7a da 93 b5 69 6a b5 10 93 38 75 ea b7 34 a3 87
000000B0: b6 83 c7 da 8a a1 d9 2a 0b 22 e2 ab 63 2b 57 2b
000000C0: 88 e3 ea be 7b fc dc 26 ac b8 bb 15 96 f9 c2 f4
000000D0: 60 17 e4 09 18 ae 78 b8 73 02 6b 0e 20 cc b1 cd
000000E0: b4 4d 94 7f f3 16 28 9a d2 bd 26 77 4b a5 85 56
000000F0: b1 81 8b 9c c3 0a 7f 67 fe 6a 61 15 f1 45 66 f3
00000100: 36 fc a5 bb 1f d7 6d e7 1d 9f 3f b5 cc 60 19 48
00000110: 17 f7 08 28 1c 58 9f 2b 7a 0b b9 50 bd 02 ea b8
00000120: 1e 03 1f 52 6a 7a fc e5 b4 6b 00 cf 0d 83 1f d2
00000130: 3f f2 ad 43 d4 86 6e c1 88 d2 87 d6 1f ac a3 30
00000140: 7b c1 5b 6a 3d 4c 20 72 5d 2c ca bf 87 a2 ce 1d
00000150: b3 fa c7 7c 22 cd 66 fc be 49 22 32 17 ee 6e 5e
00000160: 62 c1 ca 12 2b 5d 3d 7b ae b5 3e 53 c5 98 05 1f
00000170: 42 53 49 d1 2c c2 d2 25 f1 d0 38 65 b7 b6
```

Responder's actions:

(69) Computes shared key

```
00000000: bd 04 9d 0f 9c 5f 58 af c7 e4 01 bc 18 59 01 7c
00000010: 88 28 f9 f2 9f 33 01 5d 49 9a 7d 14 74 d4 31 ac
```

(70) Computes SKEYSEED

```
00000000: 9b ed 6c 79 64 b3 de 3a e4 9e dd 62 04 5a f0 8b
00000010: 43 88 33 d4 e6 9e 73 16 a1 1a 9e b2 b4 19 13 c5
00000020: d0 6d fb 86 40 11 c3 02 bb e5 a3 b5 e4 4a c4 c0
00000030: 9d 18 c6 94 de c3 c5 14 82 e7 a2 51 fe c4 98 ca
```

(71) Computes SK_d

```
000000000: c2 21 15 fd d3 99 3b 2a 43 60 c4 59 34 b0 be 3f  
000000010: 53 ef 6e b1 dd 88 ad 72 55 dd 83 22 5c 6f e1 d6  
000000020: 1f 1e ab 06 f9 41 cb c8 ea f9 dc fc 19 a0 2d bf  
000000030: 9a 0a 3f 3a 9a 45 1f 08 b6 a9 2c 62 52 b7 26 34
```

(72) Computes SK_ei

```
000000000: 18 4e 4e 0f 36 28 bf 3c 9c 04 8e 93 bf a0 77 53  
000000010: 91 34 12 81 42 e6 4e 62 7f db a5 ed 98 60 50 ff  
000000020: b4 e1 3e 23
```

(73) Computes SK_er

```
000000000: e9 27 59 2f 09 49 68 1e 0e 62 db c6 19 06 73 13  
000000010: cf da 5c 02 27 3e 4a b4 78 98 b4 86 d0 e9 34 f4  
000000020: a5 bb 18 2f
```

(74) Computes SK_pi

```
000000000: 30 2c 10 8d 0f 61 47 00 f1 40 4f a9 4f af b5 30  
000000010: 11 ba 5f 24 39 32 85 12 4e 7e 71 75 50 15 a6 93  
000000020: c3 d0 5e 40 2e 21 8e b1 59 09 cd a4 eb b4 91 68  
000000030: 29 42 fe e2 d8 76 8f a6 96 55 1f ab 6c 9b 00 f8
```

(75) Computes SK_pr

```
000000000: 6f 81 72 cb 96 58 fb 0e 17 70 b6 b9 1f a9 69 a9  
000000010: fc c7 27 4f b4 e1 85 90 a0 c7 9f f9 72 11 61 2a  
000000020: 35 b7 b7 96 d3 6a bb a5 aa b1 b8 34 8d 99 c6 f3  
000000030: 2b fc 32 56 c1 94 71 04 55 bd 89 6a bf c3 8b fe
```

(76) Extracts IV from message (fragment 1)

```
000000000: 00 00 00 00 00 00 00 00
```

(77) Computes K1i (i1 = 0)

```
000000000: 3c 57 d7 c8 9f 50 98 fc 86 81 d6 8a 4e 5d 83 c6  
000000010: 1e 42 e6 e7 60 67 05 8d f5 2e 10 13 12 15 32 58
```

(78) Computes K2i (i2 = 0)

```
000000000: 0b 88 0a 1b c8 3e 61 79 82 08 db 13 31 08 63 3c  
000000010: 17 62 17 cb 7d 18 ce 70 37 84 85 f4 89 49 d0 06
```

(79) Computes K3i (i3 = 0)

```
000000000: 18 63 41 67 49 6e cf 48 56 71 4d aa 42 63 5c 11  
000000010: 2e 26 5b e2 7b c7 53 a4 09 82 e5 5a 7e f4 65 4d
```

(80) Composes MGM nonce (fragment 1)

```
000000000: 00 00 00 00 b4 e1 3e 23
```

(81)

Extracts ICV from message (fragment 1)

00000000: b1 51 cd e6 dc 64 12 1c

(82)

Extracts AAD from message (fragment 1)

00000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
00000010: 35 20 23 08 00 00 00 01 00 00 02 20 23 00 02 04
00000020: 00 01 00 04

(83)

Extracts ciphertext from message (fragment 1)

```
000000000: 03 45 60 11 15 25 f5 45 bb 0e f4 25 26 e2 14 8c
00000010: a7 01 82 f6 9c 6e 42 f1 a3 9b 9e ac a6 dd 0d 9c
00000020: ff 79 15 ed b9 0c 81 a0 b4 29 61 fb 55 1b c1 73
00000030: 4d de 1f b2 5f 1f cb 84 5d 12 24 85 52 c4 f2 1d
00000040: 01 a7 92 ad 55 4d 90 d0 58 d2 1a 5e f6 dc 4e 73
00000050: d4 9b 08 66 d7 64 de 10 e6 75 69 20 e3 7b 6c f0
00000060: 4b 8b ff 60 39 f1 19 31 72 dd c1 09 33 5b 1d 56
00000070: ee 0c 1c 42 d7 f3 04 d3 5b 9a 6e cf 7f b3 1f ac
00000080: 34 a6 ee e0 ac 87 b8 88 99 75 a6 ae dc b5 30 38
00000090: eb 3d 48 fd cc 69 64 f8 c6 61 ce e9 e1 24 ba aa
000000A0: 25 5e e6 ea 8b 0c ef 20 31 bf a9 ae 6d e2 82 d4
000000B0: ab 2c d7 af ca 62 fe bd 7c 8f a9 dc d3 63 05 d7
000000C0: ba 92 56 66 44 ad 5d 9d 1e 9a 27 2e 22 6e 5b 0c
000000D0: af 84 6b c6 a7 cf ca 72 f8 8e d3 a1 bc d4 7c 5b
000000E0: 7e 26 7f b3 05 d8 62 ef ad d6 07 70 d7 4b 33 e4
000000F0: 26 84 e6 eb 5b 65 5c a7 71 29 45 15 d9 b0 83 6a
00000100: 52 5f a9 d8 dd f1 d8 62 c7 d7 3d e9 69 0e c5 b1
00000110: e1 de 20 6c 3d 5f f7 9f f6 a5 7b 4d a5 4e e9
00000120: b4 c4 c2 7d cc 43 62 77 57 37 d3 40 48 b2 c0 5b
00000130: 48 ab d0 94 79 ef 3d 04 e3 d8 6d 42 56 ed cd 94
00000140: b4 23 2c fa f0 6b 39 ad 41 a3 b3 8f ec b8 6c ef
00000150: e1 98 3a b2 fb a8 fd 21 96 8a bf 3a 65 47 8a e9
00000160: 69 60 44 02 2c ec 7a 86 74 fe 1d 9b 08 5e b8 5e
00000170: f8 ca 37 20 5f a7 74 8c 12 88 f2 d8 9e d4 94 29
00000180: c2 db f9 fb 35 a0 cf 21 2b da 8b 9e cc 52 84 eb
00000190: c4 12 39 3e e6 18 fb f7 57 6c b5 1e 10 3d 11 9c
000001A0: 29 9c 41 73 69 d8 d0 9d 71 2b 77 66 87 65 51 19
000001B0: db 27 a0 dd aa 64 ba fd c0 5f e1 4e da 7c 20 fc
000001C0: 8c 13 ab 2d c2 9c 37 9d 7e 51 cb 29 03 10 52 dc
000001D0: f8 09 61 cc 12 9a a0 8e 1b e4 52 f8 72 bd 7a 86
000001E0: db 93 7c 55 b8 1e 7f 21 d4 e6 02 f2
```

- (84) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext (fragment 1)

```
00000000: 25 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06 03
00000010: 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f 70
00000020: 20 54 65 73 74 20 43 6c 69 65 6e 74 31 13 30 11
00000030: 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c 55
00000040: 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 26 00
00000050: 05 00 04 30 82 04 f7 30 82 04 a4 a0 03 02 01 02
00000060: 02 13 7c 00 03 da a8 9e 1e ff 9e 79 05 fb bb 00
00000070: 01 00 03 da a8 30 0a 06 08 2a 85 03 07 01 01 03
00000080: 02 30 82 01 0a 31 18 30 16 06 05 2a 85 03 64 01
00000090: 12 0d 31 32 33 34 35 36 37 38 39 30 31 32 33 31
000000A0: 1a 30 18 06 08 2a 85 03 03 81 03 01 01 12 0c 30
000000B0: 30 31 32 33 34 35 36 37 38 39 30 31 2f 30 2d 06
000000C0: 03 55 04 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83
000000D0: d1 89 d1 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0
000000E0: b2 d0 b0 d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09
000000F0: 06 03 55 04 06 13 02 52 55 31 19 30 17 06 03 55
00000100: 04 08 0c 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba
00000110: d0 b2 d0 b0 31 15 30 13 06 03 55 04 07 0c 0c d0
00000120: 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06
00000130: 03 55 04 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a
00000140: d0 a0 d0 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0
00000150: 9e 22 31 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0
00000160: b5 d1 81 d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3
00000170: d0 a6 20 d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000180: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30
00000190: 1e 17 0d 32 31 31 30 30 31 30 36 31 30 31 30 5a
000001A0: 17 0d 32 32 30 31 30 31 30 36 32 30 31 30 5a 30
000001B0: 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45 20
000001C0: 49 6e 74 65 72 6f 70 20 54 65 73 74 20 43 6c 69
000001D0: 65 6e 74 31 13 30 11 06 03 55 04 0a 13 0a 45 4c
000001E0: 56 49 53 2d 50 4c 55 53 31 0b 30 00
```

(85) Extracts IV from message (fragment 2)

```
00000000: 00 00 00 00 00 00 00 01
```

(86) Uses previously computed key K3i

```
00000000: 18 63 41 67 49 6e cf 48 56 71 4d aa 42 63 5c 11
00000010: 2e 26 5b e2 7b c7 53 a4 09 82 e5 5a 7e f4 65 4d
```

(87) Composes MGM nonce (fragment 2)

000000000: 00 00 00 01 b4 e1 3e 23

(88) Extracts ICV from message (fragment 2)

000000000: b4 68 c7 4d eb dd bd 92

(89) Extracts AAD from message (fragment 2)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 08 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 02 00 04

(90) Extracts ciphertext from message (fragment 2)

```
00000000: 3c b1 b4 aa 04 56 27 1b 45 04 f7 70 1b 17 16 16
00000010: 85 16 ee b3 88 7d 08 64 2d 24 b8 1d 7e ac c9 72
00000020: 73 07 d3 d9 ef 5d 08 8b 47 97 5a 98 53 00 ec 13
00000030: cc 5a 46 7b 16 a2 14 6a f1 ea 17 71 9b 75 1d 46
00000040: 9d 6d 8c 3a a2 b2 75 c5 c9 4c 16 56 73 03 16 40
00000050: 42 fe a2 5a cc c7 ed 37 91 b1 eb e5 56 2a 01 bc
00000060: a2 83 ac 05 f1 a7 56 e5 f2 bb f4 18 7f 05 82 14
00000070: 70 de af 44 d4 cc a9 0a 95 6d c1 96 11 3d cf e1
00000080: aa 27 f1 87 60 d2 32 c1 1e 91 bf 60 00 5f d3 fb
00000090: a4 55 2e f0 0b 08 14 ed a3 63 54 4c b8 7b 5c 71
000000A0: 69 d1 3b 0c 6c 93 f3 99 2e fe 36 98 90 a1 05 ee
000000B0: 35 d2 da f8 81 59 f5 17 23 33 40 99 99 42 37 b0
000000C0: 0d 94 0a bd 00 cf 1c be 0e d0 13 93 e2 27 5a a5
000000D0: c5 e8 a0 25 5a 2d ad 6c b4 bc 64 37 05 ac cd 22
000000E0: 92 13 83 ab e8 87 93 29 82 dc 47 b4 1c 92 4d 36
000000F0: ef ba 10 3d 42 2d d6 2c d5 6b 95 99 2d 17 61 c4
00000100: c5 13 ed 55 a5 e5 b2 65 ac 25 24 21 c4 25 7f 6f
00000110: 68 fb ce 8f 17 60 e9 ac 9c 52 9f d5 d4 a7 14 35
00000120: 89 a4 1f de 21 a9 51 3c 1d 73 00 10 ba a6 7c 24
00000130: fb b9 20 21 5e df 63 8a c8 1f b1 55 05 5a 70 a8
00000140: b5 f4 23 9e 22 c0 2a 7c a5 11 01 c3 5e 3d 52 2a
00000150: b8 1d c5 19 b5 55 cc 8e f0 8d 6e 93 36 10 cd e3
00000160: c8 a5 a6 2e 90 53 fa 92 64 16 6c 4f da 9b e5 f8
00000170: 91 c5 ea b4 60 64 db ed d5 bc fc 3a 73 62 ce b2
00000180: ff 7a 15 95 0d 77 00 ee 5c a8 c5 89 2f 39 13 59
00000190: dd 52 ea 11 ae 28 82 36 be aa 29 68 4c f6 63 d5
000001A0: 93 a5 54 3d 8f 13 26 0a 87 34 b9 81 1c 2c cd d5
000001B0: 79 3a 65 6d 1c 6e 32 be b0 77 b7 b3 e4 ae b8 72
000001C0: f9 44 59 e9 14 46 67 56 93 ca 70 d1 ac 25 05 62
000001D0: f7 55 c2 9e 2e 11 a7 29 01 24 77 4a 6f 1c ba f6
000001E0: 4a 4f 83 75 29 1e c7 a9 68 29 02 d0
```

- (91) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext (fragment 2)

```
00000000: 09 06 03 55 04 06 13 02 52 55 30 81 aa 30 21 06
00000010: 08 2a 85 03 07 01 01 01 02 30 15 06 09 2a 85 03
00000020: 07 01 02 01 02 01 06 08 2a 85 03 07 01 01 02 03
00000030: 03 81 84 00 04 81 80 ee 2f 0a 0e 09 1e 7e 04 ef
00000040: ba 5b 62 a2 52 86 e1 9c 24 50 30 50 b0 b4 8a 37
00000050: 35 b5 fc af 28 94 ec b5 9b 92 41 5b 69 e2 c9 ba
00000060: 24 de 6a 72 c4 ef 44 bb 89 a1 05 14 1b 87 3d 6a
00000070: a3 72 3e 17 ca 7f 39 28 ce 16 8b dd 07 52 87 6a
00000080: 0d 77 42 6d 99 2b 46 2c fd 4b b2 7c d7 c7 17 08
00000090: 12 54 63 47 9d 14 3d 61 ed f2 95 ab 11 80 69 02
000000A0: a7 66 60 50 7e a4 53 6d ad 01 49 b2 16 8a 95 1d
000000B0: cf 1a 57 93 56 14 5e a3 82 02 59 30 82 02 55 30
000000C0: 0e 06 03 55 1d 0f 01 01 ff 04 04 03 02 05 a0 30
000000D0: 13 06 03 55 1d 25 04 0c 30 0a 06 08 2b 06 01 05
000000E0: 05 07 03 11 30 1d 06 03 55 1d 0e 04 16 04 14 40
000000F0: 81 b1 d1 18 75 f0 da 6b 3c 50 5f cd 73 1d d9 77
00000100: f2 d7 c1 30 1f 06 03 55 1d 23 04 18 30 16 80 14
00000110: 9b 85 5e fb 81 dc 4d 59 07 51 63 cf be df da 2c
00000120: 7f c9 44 3c 30 82 01 0f 06 03 55 1d 1f 04 82 01
00000130: 06 30 82 01 02 30 81 ff a0 81 fc a0 81 f9 86 81
00000140: b5 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74
00000150: 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72
00000160: 75 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 21 30 34
00000170: 32 32 21 30 34 33 35 21 30 34 34 31 21 30 34 34
00000180: 32 21 30 34 33 65 21 30 34 33 32 21 30 34 34 62
00000190: 21 30 34 33 39 25 32 30 21 30 34 32 33 21 30 34
000001A0: 32 36 25 32 30 21 30 34 31 65 21 30 34 31 65 21
000001B0: 30 34 31 65 25 32 30 21 30 30 32 32 21 30 34 31
000001C0: 61 21 30 34 32 30 21 30 34 31 38 21 30 34 31 66
000001D0: 21 30 34 32 32 21 30 34 31 65 2d 21 30 34 31 66
000001E0: 21 30 34 32 30 21 30 34 31 65 21 00
```

(92) Extracts IV from message (fragment 3)

```
00000000: 00 00 00 00 00 00 00 02
```

(93) Uses previously computed key K3i

```
00000000: 18 63 41 67 49 6e cf 48 56 71 4d aa 42 63 5c 11
00000010: 2e 26 5b e2 7b c7 53 a4 09 82 e5 5a 7e f4 65 4d
```

(94) Composes MGM nonce (fragment 3)

000000000: 00 00 00 02 b4 e1 3e 23

(95) Extracts ICV from message (fragment 3)

000000000: 54 4f 9b aa dd af bd ca

(96) Extracts AAD from message (fragment 3)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 08 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 03 00 04

(97) Extracts ciphertext from message (fragment 3)

```
000000000: e7 72 d9 51 90 b1 a2 bc 81 8d d6 56 bf 7a 81 e0
00000010: 1a a1 70 8b 35 a0 7e 5f e8 df 58 3d 75 5d d2 4c
00000020: 4c ce 17 77 3f 28 9c ca 7a a4 23 23 f0 c7 ff ff
00000030: 98 ee e3 1a 27 39 4d 90 1a b7 5b 44 11 16 11 3a
00000040: ea bf 83 66 da 92 2a 3a 3d bd b5 40 c8 bc f6 ed
00000050: cb 1d 5a 8e 30 f0 06 72 dc 6c da c1 45 7b e8 25
00000060: ca 93 2a b2 fe 4a db 00 90 e3 31 78 26 8d ae c8
00000070: 39 66 80 7d e5 01 5f 21 d6 c3 40 46 19 e4 43 9d
00000080: 23 c6 c1 18 06 49 bd f5 dc 8c 1b 19 b0 60 0c a3
00000090: ad f5 5c 57 e8 8e 37 e6 ea b6 79 11 b8 f1 16 ba
000000A0: a6 d9 09 1f 0d e0 3c 07 b8 ce 9d 11 a3 c6 f7 e4
000000B0: 62 e8 94 7b ad b9 8a 6b 9c f1 f8 43 cf 7e fc 5e
000000C0: 44 ab bf b1 88 f5 67 1e 84 5f 82 63 f3 13 89 55
000000D0: f5 ef 86 c3 db 48 37 f8 26 3c c4 6d a5 fc b5 69
000000E0: 56 0d 2d f3 c0 98 dd e7 53 da 0a 28 87 2f 38 ab
000000F0: a9 ec 60 a6 c4 54 c6 68 e7 6b e3 4b 54 bf b5 82
00000100: 44 c9 b9 45 bc 9e f5 58 d8 76 63 92 cd 52 ec 82
00000110: 80 d6 43 86 10 16 eb 7b 32 e4 ee ba ec 09 b6 4f
00000120: 35 1a bf da d7 de 40 fa b5 d2 40 f2 73 09 2d 52
00000130: 83 bd 56 a6 6b d3 9f 8a c2 c5 66 c6 6b 22 fb 6a
00000140: 00 b2 8a ac 9d 8b fc 8d 41 af 80 92 16 51 e2 cb
00000150: 89 62 9b 77 2b 1e 38 01 df fc 1f 81 2d 95 8b 9e
00000160: 1d 1e ad 9c c0 0d fc 77 6e 35 13 16 26 28 1a 29
00000170: 19 7f f8 08 5a 0f 09 4f 6f ba 7f 4c 5b cd 0c c2
00000180: 71 ab ea 82 a2 d2 d1 1b 17 fd dc c3 54 03 85 14
00000190: f4 90 47 2e 67 d7 93 c3 67 7e 8a f7 43 1a b3 41
000001A0: 32 f7 b0 58 38 6e 24 c8 96 d9 94 d3 54 89 2d 61
000001B0: 10 a9 9c 22 51 52 02 c9 b7 8d cc 5b 28 6d cb 55
000001C0: 5d 2f 97 8a 8f 3f 27 56 73 eb ec 5d e4 64 91 49
000001D0: 3b 88 f2 0a fc ed a5 67 a9 e3 71 ef 31 ce a0 33
000001E0: fc d8 ea 4d 1e 3f dc 89 c8 89 e2 c3
```

- (98) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext (fragment 3)

```
000000000: 30 30 32 32 28 31 29 2e 63 72 6c 86 3f 68 74 74
00000010: 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32
00000020: 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65
00000030: 72 74 45 6e 72 6f 6c 6c 2f 74 65 73 74 67 6f 73
00000040: 74 32 30 31 32 28 31 29 2e 63 72 6c 30 81 da 06
00000050: 08 2b 06 01 05 05 07 01 01 04 81 cd 30 81 ca 30
00000060: 44 06 08 2b 06 01 05 05 07 30 02 86 38 68 74 74
00000070: 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32
00000080: 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65
00000090: 72 74 45 6e 72 6f 6c 6c 2f 72 6f 6f 74 32 30 31
000000A0: 38 2e 63 72 74 30 3f 06 08 2b 06 01 05 05 07 30
000000B0: 01 86 33 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f
000000C0: 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f
000000D0: 2e 72 75 2f 6f 63 73 70 32 30 31 32 67 2f 6f 63
000000E0: 73 70 2e 73 72 66 30 41 06 08 2b 06 01 05 05 07
000000F0: 30 01 86 35 68 74 74 70 3a 2f 2f 74 65 73 74 67
00000100: 6f 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72
00000110: 6f 2e 72 75 2f 6f 63 73 70 32 30 31 32 67 73 74
00000120: 2f 6f 63 73 70 2e 73 72 66 30 0a 06 08 2a 85 03
00000130: 07 01 01 03 02 03 41 00 21 ee 3b e1 fd 0f 36 90
00000140: 92 c4 a2 35 26 e8 dc 4e b8 ef 89 40 70 d2 91 39
00000150: bc 79 a6 e2 f7 c1 06 bd d5 d6 ff 72 a5 6c f2 c0
00000160: c3 75 e9 ca 67 81 c1 93 96 b4 bd 18 12 4c 37 f7
00000170: d9 73 d6 4c 8a a6 c4 0a 24 00 00 19 04 5e 9e 50
00000180: 5f 58 b0 a5 7a 33 45 83 49 66 0f 1c 3c 7a 67 71
00000190: 98 27 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06
000001A0: 03 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f
000001B0: 70 20 54 65 73 74 20 53 65 72 76 65 72 31 13 30
000001C0: 11 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c
000001D0: 55 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 29
000001E0: 00 00 95 0e 00 00 00 0c 30 0a 06 00
```

(99) Extracts IV from message (fragment 4)

```
000000000: 00 00 00 00 00 00 00 03
```

(100) Uses previously computed key K3i

```
000000000: 18 63 41 67 49 6e cf 48 56 71 4d aa 42 63 5c 11
00000010: 2e 26 5b e2 7b c7 53 a4 09 82 e5 5a 7e f4 65 4d
```

(101) Composes MGM nonce (fragment 4)

000000000: 00 00 00 03 b4 e1 3e 23

(102) Extracts ICV from message (fragment 4)

000000000: d2 25 f1 d0 38 65 b7 b6

(103) Extracts AAD from message (fragment 4)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 08 00 00 00 01 00 00 01 7a 00 00 01 5e
000000020: 00 04 00 04

(104) Extracts ciphertext from message (fragment 4)

```
00000000: e0 8a 0b 04 ee f8 47 c2 52 96 71 9f 9d 39 0c 91
00000010: ea 6a 16 7c 80 31 a0 fd 76 cc c4 f1 8f 1a d3 be
00000020: fa 78 6b df c1 c6 73 83 be 36 69 c4 8a 87 ed 11
00000030: 90 31 a8 fd f9 0a 5c e4 d4 23 c9 e6 b3 96 ac b6
00000040: 8e bd fc 27 58 79 9f cc 8b ac 6b 59 e4 70 4b 05
00000050: 23 16 ed 49 25 f3 de 02 2e ce ae 86 e8 b4 ca b4
00000060: 96 ad 5b f6 2b c2 47 33 6f da f3 97 3c 13 ed 1f
00000070: 7a da 93 b5 69 6a b5 10 93 38 75 ea b7 34 a3 87
00000080: b6 83 c7 da 8a a1 d9 2a 0b 22 e2 ab 63 2b 57 2b
00000090: 88 e3 ea be 7b fc dc 26 ac b8 bb 15 96 f9 c2 f4
000000A0: 60 17 e4 09 18 ae 78 b8 73 02 6b 0e 20 cc b1 cd
000000B0: b4 4d 94 7f f3 16 28 9a d2 bd 26 77 4b a5 85 56
000000C0: b1 81 8b 9c c3 0a 7f 67 fe 6a 61 15 f1 45 66 f3
000000D0: 36 fc a5 bb 1f d7 6d e7 1d 9f 3f b5 cc 60 19 48
000000E0: 17 f7 08 28 1c 58 9f 2b 7a 0b b9 50 bd 02 ea b8
000000F0: 1e 03 1f 52 6a 7a fc e5 b4 6b 00 cf 0d 83 1f d2
00000100: 3f f2 ad 43 d4 86 6e c1 88 d2 87 d6 1f ac a3 30
00000110: 7b c1 5b 6a 3d 4c 20 72 5d 2c ca bf 87 a2 ce 1d
00000120: b3 fa c7 7c 22 cd 66 fc be 49 22 32 17 ee 6e 5e
00000130: 62 c1 ca 12 2b 5d 3d 7b ae b5 3e 53 c5 98 05 1f
00000140: 42 53 49 d1 2c c2
```

(105) Decrypts ciphertext and verifies ICV using K3i as K_msg,
resulted in plaintext (fragment 4)

```
00000000: 08 2a 85 03 07 01 01 03 03 6a 3e 59 0d 72 1e 55
00000010: a3 c0 d1 2f 8a 9b 4e 44 10 58 59 bd 62 9e e7 12
00000020: 31 e5 7d 01 53 f3 84 40 dd ac 73 ed 09 3a 10 d9
00000030: 6e 7f eb 80 6c 11 9e 91 f3 7c 3c b0 55 f7 4b ec
00000040: 0e 78 36 10 95 02 09 86 b3 27 04 2a 83 3c 89 36
00000050: 1b 73 cf 7b c9 e0 df a2 07 12 1e 69 52 4d 89 1b
00000060: de 6e 48 d1 34 fa 21 78 22 88 2e 30 86 c0 80 0a
00000070: 2d 74 af 08 ff 35 75 a5 79 e3 85 40 22 6b a8 42
00000080: f6 72 24 bf 29 87 58 a8 20 29 00 00 08 00 00 40
00000090: 00 2f 00 00 0c 00 00 40 01 00 00 00 04 21 00 00
000000A0: 10 01 00 00 00 00 01 00 00 00 03 00 00 2c 00 00
000000B0: 38 00 00 00 34 01 03 04 05 6c 0c a5 70 03 00 00
000000C0: 08 01 00 00 20 03 00 00 08 01 00 00 21 03 00 00
000000D0: 08 01 00 00 22 03 00 00 08 01 00 00 23 00 00 00
000000E0: 08 05 00 00 00 2d 00 00 28 02 00 00 00 07 01 00
000000F0: 10 08 00 08 00 0a 6f 0a ab 0a 6f 0a ab 07 00 00
00000100: 10 00 00 ff ff 00 00 00 00 ff ff ff ff 29 00 00
00000110: 28 02 00 00 00 07 01 00 10 08 00 08 00 0a 00 00
00000120: 02 0a 00 00 02 07 00 00 10 00 00 ff ff 0a 00 00
00000130: 00 0a 00 00 ff 29 00 00 08 00 00 40 0a 00 00 00
00000140: 08 00 00 40 0b 00
```

(106) Reassembles message from received fragments and parses it

```

IKE SA Auth
#9280E0822E758778.DB578D97DE119D1E.00000001 IKEv2 I->R[1847]
4*EF[...]->E[1819]{
    IDi[78](DN){CN=IKE Interop Test Client,O=ELVIS-PLUS,C=RU},
    CERT[1280](X.509 Cert){308204...A6C40A},
    CERTREQ[25](X.509 Cert){5E9E50...677198},
    IDr[78](DN){CN=IKE Interop Test Server,O=ELVIS-PLUS,C=RU},
    AUTH[149](Sig){id-tc26-signwithdigest-gost3410-12-512[12]:
        6A3E59...58A820},
    N[8](INITIAL_CONTACT),
    N[12](SET_WINDOW_SIZE){4},
    CP[16](REQUEST){IP4.Address[0], IP4.DNS[0]},
    SA[56]{
        P[52](#1:ESP:6C0CA570:5#){
            Encryption=ENCR_KUZNYECHIK_MGM_KTREE,
            ENCR_MAGMA_MGM_KTREE,
            ENCR_KUZNYECHIK_MGM_MAC_KTREE,
            ENCR_MAGMA_MGM_MAC_KTREE,
            ESN=Off}},
        TSi[40](2#){10.111.10.171:icmp:8.0, 0.0.0.0-255.255.255.255},
        TSr[40](2#){10.0.0.2:icmp:8.0, 10.0.0.0-10.0.0.255},
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
}

```

(107) Computes prf(SK_pi, IDi)

```

00000000: ce e8 8b d1 7e 3c 83 32 eb d1 29 08 de dc 71 f4
00000010: 8f ba 09 b8 ca 5b 10 e2 f4 44 29 5c 97 7b 26 01
00000020: a4 ba 83 c8 ea 40 92 0f 88 18 bd e7 e1 c9 45 cf
00000030: ff 99 48 05 0d f4 93 a6 cd 54 46 d7 eb 7a 52 94

```

(108) Uses initiator's public key

```
000000010: EE 2F 0A 0E 09 1E 7E 04 EF BA 5B 62 A2 52 86 E1
000000020: 9C 24 50 30 50 B0 B4 8A 37 35 B5 FC AF 28 94 EC
000000030: B5 9B 92 41 5B 69 E2 C9 BA 24 DE 6A 72 C4 EF 44
000000040: BB 89 A1 05 14 1B 87 3D 6A A3 72 3E 17 CA 7F 39
000000050: 28 CE 16 8B DD 07 52 87 6A 0D 77 42 6D 99 2B 46
000000060: 2C FD 4B B2 7C D7 C7 17 08 12 54 63 47 9D 14 3D
000000070: 61 ED F2 95 AB 11 80 69 02 A7 66 60 50 7E A4 53
000000080: 6D AD 01 49 B2 16 8A 95 1D CF 1A 57 93 56 14 5E
```

(109) Verifies signature from AUTH payload using algorithm id-tc26-signwithdigest-gost3410-12-512

```
000000000: 6a 3e 59 0d 72 1e 55 a3 c0 d1 2f 8a 9b 4e 44 10
000000010: 58 59 bd 62 9e e7 12 31 e5 7d 01 53 f3 84 40 dd
000000020: ac 73 ed 09 3a 10 d9 6e 7f eb 80 6c 11 9e 91 f3
000000030: 7c 3c b0 55 f7 4b ec 0e 78 36 10 95 02 09 86 b3
000000040: 27 04 2a 83 3c 89 36 1b 73 cf 7b c9 e0 df a2 07
000000050: 12 1e 69 52 4d 89 1b de 6e 48 d1 34 fa 21 78 22
000000060: 88 2e 30 86 c0 80 0a 2d 74 af 08 ff 35 75 a5 79
000000070: e3 85 40 22 6b a8 42 f6 72 24 bf 29 87 58 a8 20
```

(110) Computes keys for ESP SAs

```
000000000: 98 ab 7e db 78 03 a1 e6 c7 21 43 ee b9 7f 5f 56
000000010: 45 bb 51 cd 0b b7 09 a1 af 34 02 87 69 4d 7b a0
000000020: 1d 14 a0 cc
000000000: 70 31 4d 57 94 8b 7e 5c 6f 29 d5 68 1b fd 43 2b
000000010: 19 4e 64 6d 8f 8a 8d 1e ba 72 24 59 c7 0c de 81
000000020: e2 04 84 af
```

(111) Computes prf(SK_pr, IDr)

```
000000000: 7d c8 6a 33 12 02 5c 21 1f ab dc 83 0b 01 a5 27  
000000010: 82 a2 f2 1f 64 c6 e9 5e 0e c0 4c e5 d9 11 8d 8e  
000000020: b9 5c ef fa b0 a3 37 75 94 20 7c e4 60 60 ed 9d  
000000030: fa 5e cb 7e e7 79 05 ab fb 51 1b 03 a8 2c c5 6a
```

(112) Uses private key for signing (little endian)

```
000000000: CB 73 0C 81 6F AC 6D 81 9F 82 AE 15 A9 08 12 17  
000000010: D3 1B 97 64 B7 1C 34 0D D3 DD 90 1F 15 8C 9B 06
```

(113) Uses random number for signing

```
000000000: 02 02 02 02 02 02 02 02 02 02 02 02 02 02 02 02  
000000010: 02 02 02 02 02 02 02 02 02 02 02 02 02 02 02 02
```

(114) Computes signature using algorithm id-tc26-signwithdigest-gost3410-12-256

```
000000000: c8 40 af f7 46 6f 7b eb d2 b9 1c 5a 80 d0 00 93  
000000010: c2 5e 44 16 40 47 f7 8e 61 9c da a5 16 94 83 c5  
000000020: 68 5f e8 4d 03 e7 c2 cd 08 07 b8 f3 46 66 6d 05  
000000030: 76 c0 d5 e7 60 1d 59 49 09 45 52 c4 95 a7 5a d3
```

(115) Computes K1r (i1 = 0)

```
000000000: 35 e4 d1 65 2e ec 24 89 e4 c9 58 b1 b9 05 1b 83  
000000010: 62 5e 65 d7 61 73 d9 1c cf 84 60 64 b9 f2 e7 51
```

(116) Computes K2r (i2 = 0)

```
00000000: 86 8c 89 42 41 d7 30 da 1a 4a 67 69 3a 32 4d 38  
00000010: f3 54 02 9f f7 7d b7 bc 5a ee 3b 60 2b 3f 05 56
```

(117) Computes K3r (i3 = 0)

```
00000000: 31 95 e8 c6 67 af 42 d8 ce f1 e8 99 c6 8b 2a c2  
00000010: 29 aa 3d c0 ff 18 5f 3d 79 4a 14 6b 9f ac d0 bb
```

(118) Selects SPI for incoming ESP SA

```
00000000: 34 ff 8a 25
```

(119) Creates message splitting it into 4 fragments

```
IKE SA Auth  
#9280E0822E758778.DB578D97DE119D1E.00000001 IKEv2 I<=R[1563]  
E[1535]->4*EF[...]{  
    IDr[78](DN){CN=IKE Interop Test Server,O=ELVIS-PLUS,C=RU},  
    CERT[1211](X.509 Cert){308204...FB346D},  
    AUTH[85](Sig){id-tc26-signwithdigest-gost3410-12-256[12]:  
        C840AF...A75AD3},  
    N[8](INITIAL_CONTACT),  
    N[12](SET_WINDOW_SIZE){64},  
    CP[16](REPLY){IP4.Address[4]=10.1.1.3},  
    SA[32]{  
        P[28] (#1:ESP:34FF8A25:2#){  
            Encryption=ENCR_MAGMA_MGM_KTREE,  
            ESN=0ff}},  
    TSi[24](1#){10.1.1.3},  
    TSr[24](1#){10.0.0.0-10.0.0.255},  
    N[8](ADDITIONAL_TS_POSSIBLE),  
    N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  
    N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(120)

Composes MGM nonce (fragment 1)

000000000: 00 00 00 00 a5 bb 18 2f

(121) Composes AAD (fragment 1)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 24 00 02 04
000000020: 00 01 00 04

(122) Composes plaintext (fragment 1)

```
000000000: 25 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06 03
00000010: 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f 70
00000020: 20 54 65 73 74 20 53 65 72 76 65 72 31 13 30 11
00000030: 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c 55
00000040: 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 27 00
00000050: 04 bb 04 30 82 04 b2 30 82 04 5f a0 03 02 01 02
00000060: 02 13 7c 00 03 d9 02 ec f9 34 3e c8 aa d6 59 00
00000070: 01 00 03 d9 02 30 0a 06 08 2a 85 03 07 01 01 03
00000080: 02 30 82 01 0a 31 18 30 16 06 05 2a 85 03 64 01
00000090: 12 0d 31 32 33 34 35 36 37 38 39 30 31 32 33 31
000000A0: 1a 30 18 06 08 2a 85 03 03 81 03 01 01 12 0c 30
000000B0: 30 31 32 33 34 35 36 37 38 39 30 31 2f 30 2d 06
000000C0: 03 55 04 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83
000000D0: d1 89 d1 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0
000000E0: b2 d0 b0 d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09
000000F0: 06 03 55 04 06 13 02 52 55 31 19 30 17 06 03 55
00000100: 04 08 0c 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba
00000110: d0 b2 d0 b0 31 15 30 13 06 03 55 04 07 0c 0c d0
00000120: 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06
00000130: 03 55 04 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a
00000140: d0 a0 d0 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0
00000150: 9e 22 31 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0
00000160: b5 d1 81 d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3
00000170: d0 a6 20 d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000180: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30
00000190: 1e 17 0d 32 31 30 39 33 30 31 33 32 34 30 36 5a
000001A0: 17 0d 32 31 31 32 33 30 31 33 33 34 30 36 5a 30
000001B0: 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45 20
000001C0: 49 6e 74 65 72 6f 70 20 54 65 73 74 20 53 65 72
000001D0: 76 65 72 31 13 30 11 06 03 55 04 0a 13 0a 45 4c
000001E0: 56 49 53 2d 50 4c 55 53 31 0b 30 00
```

- (123) Encrypts plaintext using K3r as K_msg, resulted in ciphertext
(fragment 1)

```
00000000: 73 f2 45 3e fb 6a 26 28 67 7d 14 e3 bf 0a 90 74
00000010: c9 95 6a 40 d5 4e a6 77 cf 58 2e b8 ae 52 f4 25
00000020: f7 82 bc d9 f0 74 4e 38 51 90 07 70 27 f8 01 27
00000030: 17 da f4 ba bc 1e 02 0b 73 ec cc 7b f8 b3 68 64
00000040: f3 48 65 33 3b ab ac 19 11 d3 f7 78 b4 f8 d1 3f
00000050: 6d 46 93 37 a6 58 48 3a 7d d0 8a 9c 84 ab de eb
00000060: 0d d4 8d ab 75 20 18 27 42 fe 24 ee ba c4 a4 6e
00000070: db 80 68 3c 84 7e d6 36 50 d4 1b 1c bc c5 9f 18
00000080: 41 af 48 52 c1 7e a2 f0 e4 bc 0a 3c 64 34 81 ca
00000090: df 96 ba 51 91 f1 06 13 b2 04 23 c8 70 3a ea 64
000000A0: e9 ea ce c2 db aa 12 90 28 0c 9d f9 89 02 a8 5e
000000B0: 66 f5 6e ce dd e7 2c 4a 45 54 de 5e b8 76 73 67
000000C0: 2d a3 a0 52 91 74 ff b7 eb e4 ea d1 2b 04 76 f7
000000D0: ff 4b 1c b8 45 7e 8a 60 e7 1e ec 13 3e c1 d8 d0
000000E0: 78 be f4 79 77 06 ce 76 04 64 ad e7 10 19 65 2b
000000F0: 45 66 23 3d 34 7a 40 6c 36 c0 20 73 47 d8 7a b6
00000100: 2b 0f 56 04 7a c0 41 ab 18 23 11 78 7f 4f d4 f5
00000110: 7d 2e 06 a5 15 ee de 84 9f c2 0a f6 c8 1e a4 30
00000120: 70 42 07 c8 5e 97 08 69 12 27 58 c3 c7 b7 db 7a
00000130: 8c 50 3a 3a 5c bf 3a a7 73 40 8f 9c 18 f6 13 77
00000140: 63 c1 60 06 36 a1 43 ab 88 08 c9 cc ad f2 88 ca
00000150: 84 bd 45 e0 8e d9 27 a3 07 f2 63 79 b0 a8 62 9f
00000160: 5f ba dc a7 f5 54 b8 4f 4f bb 1e a2 16 4b 4f 2d
00000170: d4 08 4e 45 c2 c0 60 3b 73 df 6b 35 3a fe 38 2e
00000180: 25 75 fc be 89 4c d2 7a 9c 1f b4 41 a6 31 d3 3d
00000190: 39 a6 d1 c4 47 94 44 30 3a 2b 23 22 ba c0 a9 df
000001A0: dc 1c 90 8d d1 e8 13 f9 08 68 5a 94 98 c7 3f 47
000001B0: 77 79 b5 bb fb 22 56 4b 38 55 48 e8 14 d4 01 eb
000001C0: 63 e9 17 da 24 69 9a 6d dc 1e 25 06 ef 77 10 46
000001D0: ad 99 ad 9c 54 4f d4 68 64 ea 05 1d ef 29 ea 0e
000001E0: 3c 1c 7e 27 cf 59 76 42 5b 02 04 b8
```

(124) Computes ICV using K3r as K_msg (fragment 1)

```
00000000: 96 08 17 ed ef 01 4d a0
```

(125) Composes IV (fragment 1)

```
00000000: 00 00 00 00 00 00 00 00
```

(126) Composes MGM nonce (fragment 2)

000000000: 00 00 00 01 a5 bb 18 2f

(127) Composes AAD (fragment 2)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 02 00 04

(128) Composes plaintext (fragment 2)

```
000000000: 09 06 03 55 04 06 13 02 52 55 30 66 30 1f 06 08
00000010: 2a 85 03 07 01 01 01 01 30 13 06 07 2a 85 03 02
00000020: 02 24 00 06 08 2a 85 03 07 01 01 02 02 03 43 00
00000030: 04 40 5b b3 14 3e f4 70 c1 70 d7 f3 27 25 d8 53
00000040: 7c e6 de 6d 8c 29 f6 b2 32 64 56 dc b1 77 f2 3d
00000050: fa f4 2a 5c f3 74 86 7f 04 72 51 c1 cf b3 43 36
00000060: f5 95 a2 af 05 47 57 1a 55 c0 78 a4 9d 64 26 b8
00000070: 61 14 a3 82 02 59 30 82 02 55 30 0e 06 03 55 1d
00000080: 0f 01 01 ff 04 04 03 02 05 a0 30 13 06 03 55 1d
00000090: 25 04 0c 30 0a 06 08 2b 06 01 05 05 07 03 11 30
000000A0: 1d 06 03 55 1d 0e 04 16 04 14 e0 d3 f0 09 ad ce
000000B0: 6c a5 47 ba 9b f7 a6 a5 1b 06 14 ba a5 43 30 1f
000000C0: 06 03 55 1d 23 04 18 30 16 80 14 9b 85 5e fb 81
000000D0: dc 4d 59 07 51 63 cf be df da 2c 7f c9 44 3c 30
000000E0: 82 01 0f 06 03 55 1d 1f 04 82 01 06 30 82 01 02
000000F0: 30 81 ff a0 81 fc a0 81 f9 86 81 b5 68 74 74 70
00000100: 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32 2e
00000110: 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65 72
00000120: 74 45 6e 72 6f 6c 6c 2f 21 30 34 32 32 21 30 34
00000130: 33 35 21 30 34 34 31 21 30 34 34 32 21 30 34 33
00000140: 65 21 30 34 33 32 21 30 34 34 62 21 30 34 33 39
00000150: 25 32 30 21 30 34 32 33 21 30 34 32 36 25 32 30
00000160: 21 30 34 31 65 21 30 34 31 65 21 30 34 31 65 25
00000170: 32 30 21 30 30 32 32 21 30 34 31 61 21 30 34 32
00000180: 30 21 30 34 31 38 21 30 34 31 66 21 30 34 32 32
00000190: 21 30 34 31 65 2d 21 30 34 31 66 21 30 34 32 30
000001A0: 21 30 34 31 65 21 30 30 32 32 28 31 29 2e 63 72
000001B0: 6c 86 3f 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f
000001C0: 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f
000001D0: 2e 72 75 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 74
000001E0: 65 73 74 67 6f 73 74 32 30 31 32 00
```

- (129) Encrypts plaintext using K3r as K_msg, resulted in ciphertext
(fragment 2)

```
00000000: b1 c8 8d ae d9 6f 91 7e 5a 6a 2d 8c e0 d6 28 3e
00000010: 10 59 46 12 a1 1e fa 53 c3 58 ec 4e a9 a5 92 0c
00000020: fa 5e cf a3 33 4a 8b b7 56 66 54 d9 9c 64 2e b6
00000030: 4d 03 3f 77 a8 17 88 f6 23 e0 2e 56 a6 a2 4c 4d
00000040: 6e e3 09 8a 2e 31 a1 85 1c cf ce 95 e7 73 93 8e
00000050: 9c 5a 7b 3b 49 75 96 69 d4 b0 46 f7 74 b0 0d 5d
00000060: 91 3b 6d 2b a4 46 cc 5c d9 a8 38 c0 6b ad 73 35
00000070: 09 aa c7 4c 91 8a 84 1c dd 3f e1 44 f7 c5 9c 61
00000080: 0e b7 03 6b 84 cc 8e 93 5b d5 f6 7e 71 3a f4 2c
00000090: 98 14 ad 47 e3 c3 70 dc e3 3e c0 a5 e0 e4 6d 01
000000A0: 44 78 7f e3 b7 6c cb 44 29 59 96 e9 84 6d 9d 18
000000B0: 89 66 16 07 46 a4 cd 72 a6 0e bd d2 a7 1c f7 21
000000C0: f0 d1 67 a9 0d 1c c4 c8 30 bd 26 1f 53 7d 61 8b
000000D0: ad 6f ef 3e 2c 6e 7e 69 b9 92 72 66 65 b6 06 22
000000E0: 49 a1 a8 f1 2f 02 dd 41 bf f5 d1 f6 7c 93 25 6e
000000F0: 52 8b a9 3f b5 40 97 02 bb 7c f5 33 a6 60 52 b8
00000100: 4f 3e 80 6c 38 cf e4 8b 15 fd d0 66 75 c1 bf bb
00000110: ac fc ac 01 c3 11 8e 0b 3e e9 2c 1b 5d b9 9f f6
00000120: 2f d7 e8 3c c7 a9 25 8b aa 6e c6 49 6d 6f df 42
00000130: 53 0e ba 70 54 d2 af c3 4d 02 e1 48 42 c5 45 53
00000140: 25 59 66 25 c7 3c c6 c2 e2 99 e2 bb 47 a4 a7 be
00000150: 6c 92 0d 3b 4c ab 6e d7 23 05 ea 73 07 62 e8 c0
00000160: e8 78 47 af 54 c8 67 8f dd 32 59 8d 87 ac 42 0e
00000170: 21 15 c4 f7 66 dc 02 cf 55 c2 e3 4d 8e 91 7a fd
00000180: d7 4d 20 b0 6f 67 78 58 08 9c ba 05 8b b0 9c 16
00000190: 20 51 75 12 96 e2 d5 28 ac 3e 50 26 04 6f 59 02
000001A0: 28 e0 ec 2c da 70 4a 9c 15 5a 2e 52 01 e6 4e 1e
000001B0: 10 6d 8d 5d 2a 81 69 0e 54 d0 5e 13 82 82 84 9a
000001C0: ac a6 0e 69 4e 17 5c c1 8a 71 f8 b4 80 3b 7a e5
000001D0: b8 1f 09 4a 02 14 24 07 af 6a 14 d9 52 8e da d3
000001E0: 58 23 68 71 27 b2 9a 03 09 f7 80 51
```

(130) Computes ICV using K3r as K_msg (fragment 2)

```
00000000: 89 bd 07 12 fc 3f 15 8d
```

(131) Composes IV (fragment 2)

```
00000000: 00 00 00 00 00 00 00 01
```

(132) Composes MGM nonce (fragment 3)

```
000000000: 00 00 00 02 a5 bb 18 2f
```

(133) Composes AAD (fragment 3)

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 00 00 02 04  
000000020: 00 03 00 04
```

(134) Composes plaintext (fragment 3)

```
00000000: 28 31 29 2e 63 72 6c 30 81 da 06 08 2b 06 01 05  
00000010: 05 07 01 01 04 81 cd 30 81 ca 30 44 06 08 2b 06  
00000020: 01 05 05 07 30 02 86 38 68 74 74 70 3a 2f 2f 74  
00000030: 65 73 74 67 6f 73 74 32 30 31 32 2e 63 72 79 70  
00000040: 74 6f 70 72 6f 2e 72 75 2f 43 65 72 74 45 6e 72  
00000050: 6f 6c 6c 2f 72 6f 6f 74 32 30 31 38 2e 63 72 74  
00000060: 30 3f 06 08 2b 06 01 05 05 07 30 01 86 33 68 74  
00000070: 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31  
00000080: 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 6f  
00000090: 63 73 70 32 30 31 32 67 2f 6f 63 73 70 2e 73 72  
000000A0: 66 30 41 06 08 2b 06 01 05 05 07 30 01 86 35 68  
000000B0: 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30  
000000C0: 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f  
000000D0: 6f 63 73 70 32 30 31 32 67 73 74 2f 6f 63 73 70  
000000E0: 2e 73 72 66 30 0a 06 08 2a 85 03 07 01 01 03 02  
000000F0: 03 41 00 a5 39 5f ca 48 e1 c2 93 c1 e0 8a 64 74  
00000100: 0f 6b 86 a2 15 9b 46 29 d0 42 71 4f ce e7 52 d7  
00000110: d7 3d aa 47 ce cf 52 63 8f 26 b2 17 5f ad 96 57  
00000120: 76 ea 5f d0 87 bb 12 29 e4 06 0e e1 5f fd 59 81  
00000130: fb 34 6d 29 00 00 55 0e 00 00 00 0c 30 0a 06 08  
00000140: 2a 85 03 07 01 01 03 02 c8 40 af f7 46 6f 7b eb  
00000150: d2 b9 1c 5a 80 d0 00 93 c2 5e 44 16 40 47 f7 8e  
00000160: 61 9c da a5 16 94 83 c5 68 5f e8 4d 03 e7 c2 cd  
00000170: 08 07 b8 f3 46 66 6d 05 76 c0 d5 e7 60 1d 59 49  
00000180: 09 45 52 c4 95 a7 5a d3 29 00 00 08 00 00 40 00  
00000190: 2f 00 00 0c 00 00 40 01 00 00 00 40 21 00 00 10  
000001A0: 02 00 00 00 00 01 00 04 0a 01 01 03 2c 00 00 20  
000001B0: 00 00 00 1c 01 03 04 02 34 ff 8a 25 03 00 00 08  
000001C0: 01 00 00 21 00 00 00 08 05 00 00 00 2d 00 00 18  
000001D0: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 01 01 03  
000001E0: 0a 01 01 03 29 00 00 18 01 00 00 00
```

- (135) Encrypts plaintext using K3r as K_msg, resulted in ciphertext (fragment 3)

```
00000000: 08 e0 86 04 1f 8a c9 b5 68 cd 96 10 ab 59 99 3a
00000010: 54 7b a9 fa d7 60 46 ec c3 bf bd 8f fa 03 ed 41
00000020: 49 13 ca 8c 9c b8 0c df 81 25 e2 30 ca cb 65 b9
00000030: 16 55 8e 67 f4 b3 7c b8 91 66 76 7c a4 15 98 a3
00000040: 3a c9 48 64 e4 ce 9f 64 67 5d bb 7c 03 23 9e c9
00000050: 81 3f da 48 ee a6 2a d8 fb ac 77 ce ed c2 a4 d9
00000060: 24 d3 71 99 fc 71 2b 6c 10 d3 c3 4b b5 37 e2 55
00000070: 5f d5 ee c0 d6 ff 66 15 8c e5 63 26 96 cd 3f 49
00000080: 2b da 51 94 55 6e 2e e5 2e d1 b4 91 81 50 85 8a
00000090: 84 bd fe 52 ec ce 1b 6b bd 7d 12 b4 de a5 88 c4
000000A0: b7 78 d3 3d 2d 46 ef dc 0f 91 43 be 08 7a ba fa
000000B0: b3 2a c2 17 30 99 79 ae 3a 00 f0 3f 47 4a 9b 11
000000C0: 4d 7b 1b 28 0a 44 5b 1a af 35 4d c3 2b 6b be 11
000000D0: 89 03 b9 de cf 37 57 53 1e a4 f3 3f ce 52 a6 d8
000000E0: 7e 9d d8 d4 2f 9f f5 8f 3c c6 cb 2f 56 e0 97 2d
000000F0: b2 0e 10 66 3b 3c ec 34 50 99 a3 7d 42 ec 96 eb
00000100: 87 48 72 2c 0a 6d af b9 4b 62 48 89 36 01 21 ab
00000110: 8e 79 10 54 9c 83 ab a9 8a 6c 37 c7 ac dc a1 7e
00000120: 41 0e 58 de da aa 95 71 fb 34 50 8a ef 37 0b c4
00000130: 56 ca 4b 2c 75 b7 c7 d9 74 22 c2 65 1a e4 4f 94
00000140: 20 f6 e9 44 f1 69 5e d2 18 d3 30 2e 85 74 25 be
00000150: 2a 88 e2 ce fe 75 ca fa 25 f9 2e 88 8c ed 6f dd
00000160: c3 c5 53 2e da 14 fd 96 28 4a b7 81 3a b3 d5 44
00000170: 26 e2 84 21 f2 5c 0a ed bf c4 34 1c a4 91 5e f3
00000180: 47 ef 0e 9e fb ee 34 95 5d 21 72 43 c9 63 af b4
00000190: f2 98 4a 36 57 77 fc e7 57 52 b2 4d bf 34 2a 98
000001A0: ea 70 cd d7 a9 da 4c 0d 19 05 d4 1e dd 36 c7 c4
000001B0: 31 54 18 2a ef 0e 30 44 97 31 15 57 cd d4 88 52
000001C0: 4e 42 c8 20 89 8d 35 7b 8e 03 96 b4 74 fb ec 3b
000001D0: 14 c2 64 49 92 f2 1f 3d ff 84 2d 92 4c b9 01 04
000001E0: 3d 0a 2a 28 33 de 43 44 6b cf 79 0e
```

(136) Computes ICV using K3r as K_msg (fragment 3)

```
00000000: 7d 7c 57 8f 91 d0 c9 eb
```

(137) Composes IV (fragment 3)

```
00000000: 00 00 00 00 00 00 00 02
```

(138) Composes MGM nonce (fragment 4)

```
000000000: 00 00 00 03 a5 bb 18 2f
```

(139) Composes AAD (fragment 4)

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 35 20 23 20 00 00 00 01 00 00 00 5e 00 00 00 42  
000000020: 00 04 00 04
```

(140) Composes plaintext (fragment 4)

```
000000000: 00 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00  
000000010: ff 29 00 00 08 00 00 40 02 29 00 00 08 00 00 40  
000000020: 0a 00 00 00 08 00 00 40 0b 00
```

(141) Encrypts plaintext using K3r as K_msg, resulted in ciphertext (fragment 4)

```
000000000: 81 fa 5d 7a 67 13 b7 93 f4 2c 01 b8 d1 02 8c ab  
000000010: 8e 80 47 25 6e c5 69 e3 0c 84 cd 35 9a 0f 7a cc  
000000020: 0a 92 7a 74 77 dc ba 60 ac 4a
```

(142) Computes ICV using K3r as K_msg (fragment 4)

```
000000000: 6c 27 70 e0 8a 82 bd 4b
```

(143) Composes IV (fragment 4)

000000000: 00 00 00 00 00 00 00 00 03

- (144) Sends message fragment (1) , peer receives message fragment (1)

10.111.10.171:54295<-10.111.15.45:4500 [548]

000000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 20 00 00 00 00 01 00 00 02 20
00000020: 24 00 02 04 00 01 00 04 00 00 00 00 00 00 00 00 00
00000030: 73 f2 45 3e fb 6a 26 28 67 7d 14 e3 bf 0a 90 74
00000040: c9 95 6a 40 d5 4e a6 77 cf 58 2e b8 ae 52 f4 25
00000050: f7 82 bc d9 f0 74 4e 38 51 90 07 70 27 f8 01 27
00000060: 17 da f4 ba bc 1e 02 0b 73 ec cc 7b f8 b3 68 64
00000070: f3 48 65 33 3b ab ac 19 11 d3 f7 78 b4 f8 d1 3f
00000080: 6d 46 93 37 a6 58 48 3a 7d d0 8a 9c 84 ab de eb
00000090: 0d d4 8d ab 75 20 18 27 42 fe 24 ee ba c4 a4 6e
000000A0: db 80 68 3c 84 7e d6 36 50 d4 1b 1c bc c5 9f 18
000000B0: 41 af 48 52 c1 7e a2 f0 e4 bc 0a 3c 64 34 81 ca
000000C0: df 96 ba 51 91 f1 06 13 b2 04 23 c8 70 3a ea 64
000000D0: e9 ea ce c2 db aa 12 90 28 0c 9d f9 89 02 a8 5e
000000E0: 66 f5 6e ce dd e7 2c 4a 45 54 de 5e b8 76 73 67
000000F0: 2d a3 a0 52 91 74 ff b7 eb e4 ea d1 2b 04 76 f7
00000100: ff 4b 1c b8 45 7e 8a 60 e7 1e ec 13 3e c1 d8 d0
00000110: 78 be f4 79 77 06 ce 76 04 64 ad e7 10 19 65 2b
00000120: 45 66 23 3d 34 7a 40 6c 36 c0 20 73 47 d8 7a b6
00000130: 2b 0f 56 04 7a c0 41 ab 18 23 11 78 7f 4f d4 f5
00000140: 7d 2e 06 a5 15 ee de 84 9f c2 0a f6 c8 1e a4 30
00000150: 70 42 07 c8 5e 97 08 69 12 27 58 c3 c7 b7 db 7a
00000160: 8c 50 3a 3a 5c bf 3a a7 73 40 8f 9c 18 f6 13 77
00000170: 63 c1 60 06 36 a1 43 ab 88 08 c9 cc ad f2 88 ca
00000180: 84 bd 45 e0 8e d9 27 a3 07 f2 63 79 b0 a8 62 9f
00000190: 5f ba dc a7 f5 54 b8 4f 4f bb 1e a2 16 4b 4f 2d
000001A0: d4 08 4e 45 c2 c0 60 3b 73 df 6b 35 3a fe 38 2e
000001B0: 25 75 fc be 89 4c d2 7a 9c 1f b4 41 a6 31 d3 3d
000001C0: 39 a6 d1 c4 47 94 44 30 3a 2b 23 22 ba c0 a9 df
000001D0: dc 1c 90 8d d1 e8 13 f9 08 68 5a 94 98 c7 3f 47
000001E0: 77 79 b5 bb fb 22 56 4b 38 55 48 e8 14 d4 01 eb
000001F0: 63 e9 17 da 24 69 9a 6d dc 1e 25 06 ef 77 10 46
00000200: ad 99 ad 9c 54 4f d4 68 64 ea 05 1d ef 29 ea 0e
00000210: 3c 1c 7e 27 cf 59 76 42 5b 02 04 b8 96 08 17 ed
00000220: ef 01 4d a0

(145)

Sends message fragment (2) , peer receives message fragment (2)

10.111.10.171:54295<-10.111.15.45:4500 [548]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 20 00 00 00 01 00 00 02 20
00000020: 00 00 02 04 00 02 00 04 00 00 00 00 00 00 00 01
00000030: b1 c8 8d ae d9 6f 91 7e 5a 6a 2d 8c e0 d6 28 3e
00000040: 10 59 46 12 a1 1e fa 53 c3 58 ec 4e a9 a5 92 0c
00000050: fa 5e cf a3 33 4a 8b b7 56 66 54 d9 9c 64 2e b6
00000060: 4d 03 3f 77 a8 17 88 f6 23 e0 2e 56 a6 a2 4c 4d
00000070: 6e e3 09 8a 2e 31 a1 85 1c cf ce 95 e7 73 93 8e
00000080: 9c 5a 7b 3b 49 75 96 69 d4 b0 46 f7 74 b0 0d 5d
00000090: 91 3b 6d 2b a4 46 cc 5c d9 a8 38 c0 6b ad 73 35
000000A0: 09 aa c7 4c 91 8a 84 1c dd 3f e1 44 f7 c5 9c 61
000000B0: 0e b7 03 6b 84 cc 8e 93 5b d5 f6 7e 71 3a f4 2c
000000C0: 98 14 ad 47 e3 c3 70 dc e3 3e c0 a5 e0 e4 6d 01
000000D0: 44 78 7f e3 b7 6c cb 44 29 59 96 e9 84 6d 9d 18
000000E0: 89 66 16 07 46 a4 cd 72 a6 0e bd d2 a7 1c f7 21
000000F0: f0 d1 67 a9 0d 1c c4 c8 30 bd 26 1f 53 7d 61 8b
00000100: ad 6f ef 3e 2c 6e 7e 69 b9 92 72 66 65 b6 06 22
00000110: 49 a1 a8 f1 2f 02 dd 41 bf f5 d1 f6 7c 93 25 6e
00000120: 52 8b a9 3f b5 40 97 02 bb 7c f5 33 a6 60 52 b8
00000130: 4f 3e 80 6c 38 cf e4 8b 15 fd d0 66 75 c1 bf bb
00000140: ac fc ac 01 c3 11 8e 0b 3e e9 2c 1b 5d b9 9f f6
00000150: 2f d7 e8 3c c7 a9 25 8b aa 6e c6 49 6d 6f df 42
00000160: 53 0e ba 70 54 d2 af c3 4d 02 e1 48 42 c5 45 53
00000170: 25 59 66 25 c7 3c c6 c2 e2 99 e2 bb 47 a4 a7 be
00000180: 6c 92 0d 3b 4c ab 6e d7 23 05 ea 73 07 62 e8 c0
00000190: e8 78 47 af 54 c8 67 8f dd 32 59 8d 87 ac 42 0e
000001A0: 21 15 c4 f7 66 dc 02 cf 55 c2 e3 4d 8e 91 7a fd
000001B0: d7 4d 20 b0 6f 67 78 58 08 9c ba 05 8b b0 9c 16
000001C0: 20 51 75 12 96 e2 d5 28 ac 3e 50 26 04 6f 59 02
000001D0: 28 e0 ec 2c da 70 4a 9c 15 5a 2e 52 01 e6 4e 1e
000001E0: 10 6d 8d 5d 2a 81 69 0e 54 d0 5e 13 82 82 84 9a
000001F0: ac a6 0e 69 4e 17 5c c1 8a 71 f8 b4 80 3b 7a e5
00000200: b8 1f 09 4a 02 14 24 07 af 6a 14 d9 52 8e da d3
00000210: 58 23 68 71 27 b2 9a 03 09 f7 80 51 89 bd 07 12
00000220: fc 3f 15 8d
```

(146) Sends message fragment (3) , peer receives message fragment (3)

10.111.10.171:54295<-10.111.15.45:4500 [548]

00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 20 00 00 00 01 00 00 02 20
00000020: 00 00 02 04 00 03 00 04 00 00 00 00 00 00 00 02
00000030: 08 e0 86 04 1f 8a c9 b5 68 cd 96 10 ab 59 99 3a
00000040: 54 7b a9 fa d7 60 46 ec c3 bf bd 8f fa 03 ed 41
00000050: 49 13 ca 8c 9c b8 0c df 81 25 e2 30 ca cb 65 b9
00000060: 16 55 8e 67 f4 b3 7c b8 91 66 76 7c a4 15 98 a3
00000070: 3a c9 48 64 e4 ce 9f 64 67 5d bb 7c 03 23 9e c9
00000080: 81 3f da 48 ee a6 2a d8 fb ac 77 ce ed c2 a4 d9
00000090: 24 d3 71 99 fc 71 2b 6c 10 d3 c3 4b b5 37 e2 55
000000A0: 5f d5 ee c0 d6 ff 66 15 8c e5 63 26 96 cd 3f 49
000000B0: 2b da 51 94 55 6e 2e e5 2e d1 b4 91 81 50 85 8a
000000C0: 84 bd fe 52 ec ce 1b 6b bd 7d 12 b4 de a5 88 c4
000000D0: b7 78 d3 3d 2d 46 ef dc 0f 91 43 be 08 7a ba fa
000000E0: b3 2a c2 17 30 99 79 ae 3a 00 f0 3f 47 4a 9b 11
000000F0: 4d 7b 1b 28 0a 44 5b 1a af 35 4d c3 2b 6b be 11
00000100: 89 03 b9 de cf 37 57 53 1e a4 f3 3f ce 52 a6 d8
00000110: 7e 9d d8 d4 2f 9f f5 8f 3c c6 cb 2f 56 e0 97 2d
00000120: b2 0e 10 66 3b 3c ec 34 50 99 a3 7d 42 ec 96 eb
00000130: 87 48 72 2c 0a 6d af b9 4b 62 48 89 36 01 21 ab
00000140: 8e 79 10 54 9c 83 ab a9 8a 6c 37 c7 ac dc a1 7e
00000150: 41 0e 58 de da aa 95 71 fb 34 50 8a ef 37 0b c4
00000160: 56 ca 4b 2c 75 b7 c7 d9 74 22 c2 65 1a e4 4f 94
00000170: 20 f6 e9 44 f1 69 5e d2 18 d3 30 2e 85 74 25 be
00000180: 2a 88 e2 ce fe 75 ca fa 25 f9 2e 88 8c ed 6f dd
00000190: c3 c5 53 2e da 14 fd 96 28 4a b7 81 3a b3 d5 44
000001A0: 26 e2 84 21 f2 5c 0a ed bf c4 34 1c a4 91 5e f3
000001B0: 47 ef 0e 9e fb ee 34 95 5d 21 72 43 c9 63 af b4
000001C0: f2 98 4a 36 57 77 fc e7 57 52 b2 4d bf 34 2a 98
000001D0: ea 70 cd d7 a9 da 4c 0d 19 05 d4 1e dd 36 c7 c4
000001E0: 31 54 18 2a ef 0e 30 44 97 31 15 57 cd d4 88 52
000001F0: 4e 42 c8 20 89 8d 35 7b 8e 03 96 b4 74 fb ec 3b
00000200: 14 c2 64 49 92 f2 1f 3d ff 84 2d 92 4c b9 01 04
00000210: 3d 0a 2a 28 33 de 43 44 6b cf 79 0e 7d 7c 57 8f
00000220: 91 d0 c9 eb

(147) Sends message fragment (4) , peer receives message fragment (4)

10.111.10.171:54295<-10.111.15.45:4500 [98]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 35 20 23 20 00 00 00 01 00 00 00 5e
00000020: 00 00 00 42 00 04 00 04 00 00 00 00 00 00 00 03
00000030: 81 fa 5d 7a 67 13 b7 93 f4 2c 01 b8 d1 02 8c ab
00000040: 8e 80 47 25 6e c5 69 e3 0c 84 cd 35 9a 0f 7a cc
00000050: 0a 92 7a 74 77 dc ba 60 ac 4a 6c 27 70 e0 8a 82
00000060: bd 4b
```

Initiator's actions:

(148) Extracts IV from message (fragment 1)

```
00000000: 00 00 00 00 00 00 00 00 00 00
```

(149) Computes K1r (i1 = 0)

```
00000000: 35 e4 d1 65 2e ec 24 89 e4 c9 58 b1 b9 05 1b 83
00000010: 62 5e 65 d7 61 73 d9 1c cf 84 60 64 b9 f2 e7 51
```

(150) Computes K2r (i2 = 0)

```
00000000: 86 8c 89 42 41 d7 30 da 1a 4a 67 69 3a 32 4d 38
00000010: f3 54 02 9f f7 7d b7 bc 5a ee 3b 60 2b 3f 05 56
```

(151) Computes K3r (i3 = 0)

```
00000000: 31 95 e8 c6 67 af 42 d8 ce f1 e8 99 c6 8b 2a c2
00000010: 29 aa 3d c0 ff 18 5f 3d 79 4a 14 6b 9f ac d0 bb
```

(152)

Composes MGM nonce (fragment 1)

000000000: 00 00 00 00 a5 bb 18 2f

(153) Extracts ICV from message (fragment 1)

000000000: 96 08 17 ed ef 01 4d a0

(154) Extracts AAD from message (fragment 1)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 24 00 02 04
000000020: 00 01 00 04

(155) Extracts ciphertext from message (fragment 1)

```
00000000: 73 f2 45 3e fb 6a 26 28 67 7d 14 e3 bf 0a 90 74
00000010: c9 95 6a 40 d5 4e a6 77 cf 58 2e b8 ae 52 f4 25
00000020: f7 82 bc d9 f0 74 4e 38 51 90 07 70 27 f8 01 27
00000030: 17 da f4 ba bc 1e 02 0b 73 ec cc 7b f8 b3 68 64
00000040: f3 48 65 33 3b ab ac 19 11 d3 f7 78 b4 f8 d1 3f
00000050: 6d 46 93 37 a6 58 48 3a 7d d0 8a 9c 84 ab de eb
00000060: 0d d4 8d ab 75 20 18 27 42 fe 24 ee ba c4 a4 6e
00000070: db 80 68 3c 84 7e d6 36 50 d4 1b 1c bc c5 9f 18
00000080: 41 af 48 52 c1 7e a2 f0 e4 bc 0a 3c 64 34 81 ca
00000090: df 96 ba 51 91 f1 06 13 b2 04 23 c8 70 3a ea 64
000000A0: e9 ea ce c2 db aa 12 90 28 0c 9d f9 89 02 a8 5e
000000B0: 66 f5 6e ce dd e7 2c 4a 45 54 de 5e b8 76 73 67
000000C0: 2d a3 a0 52 91 74 ff b7 eb e4 ea d1 2b 04 76 f7
000000D0: ff 4b 1c b8 45 7e 8a 60 e7 1e ec 13 3e c1 d8 d0
000000E0: 78 be f4 79 77 06 ce 76 04 64 ad e7 10 19 65 2b
000000F0: 45 66 23 3d 34 7a 40 6c 36 c0 20 73 47 d8 7a b6
00000100: 2b 0f 56 04 7a c0 41 ab 18 23 11 78 7f 4f d4 f5
00000110: 7d 2e 06 a5 15 ee de 84 9f c2 0a f6 c8 1e a4 30
00000120: 70 42 07 c8 5e 97 08 69 12 27 58 c3 c7 b7 db 7a
00000130: 8c 50 3a 3a 5c bf 3a a7 73 40 8f 9c 18 f6 13 77
00000140: 63 c1 60 06 36 a1 43 ab 88 08 c9 cc ad f2 88 ca
00000150: 84 bd 45 e0 8e d9 27 a3 07 f2 63 79 b0 a8 62 9f
00000160: 5f ba dc a7 f5 54 b8 4f 4f bb 1e a2 16 4b 4f 2d
00000170: d4 08 4e 45 c2 c0 60 3b 73 df 6b 35 3a fe 38 2e
00000180: 25 75 fc be 89 4c d2 7a 9c 1f b4 41 a6 31 d3 3d
00000190: 39 a6 d1 c4 47 94 44 30 3a 2b 23 22 ba c0 a9 df
000001A0: dc 1c 90 8d d1 e8 13 f9 08 68 5a 94 98 c7 3f 47
000001B0: 77 79 b5 bb fb 22 56 4b 38 55 48 e8 14 d4 01 eb
000001C0: 63 e9 17 da 24 69 9a 6d dc 1e 25 06 ef 77 10 46
000001D0: ad 99 ad 9c 54 4f d4 68 64 ea 05 1d ef 29 ea 0e
000001E0: 3c 1c 7e 27 cf 59 76 42 5b 02 04 b8
```

- (156) Decrypts ciphertext and verifies ICV using K3r as K_msg, resulted in plaintext (fragment 1)

```
00000000: 25 00 00 4e 09 00 00 00 30 44 31 20 30 1e 06 03
00000010: 55 04 03 13 17 49 4b 45 20 49 6e 74 65 72 6f 70
00000020: 20 54 65 73 74 20 53 65 72 76 65 72 31 13 30 11
00000030: 06 03 55 04 0a 13 0a 45 4c 56 49 53 2d 50 4c 55
00000040: 53 31 0b 30 09 06 03 55 04 06 13 02 52 55 27 00
00000050: 04 bb 04 30 82 04 b2 30 82 04 5f a0 03 02 01 02
00000060: 02 13 7c 00 03 d9 02 ec f9 34 3e c8 aa d6 59 00
00000070: 01 00 03 d9 02 30 0a 06 08 2a 85 03 07 01 01 03
00000080: 02 30 82 01 0a 31 18 30 16 06 05 2a 85 03 64 01
00000090: 12 0d 31 32 33 34 35 36 37 38 39 30 31 32 33 31
000000A0: 1a 30 18 06 08 2a 85 03 03 81 03 01 01 12 0c 30
000000B0: 30 31 32 33 34 35 36 37 38 39 30 31 2f 30 2d 06
000000C0: 03 55 04 09 0c 26 d1 83 d0 bb 2e 20 d0 a1 d1 83
000000D0: d1 89 d1 91 d0 b2 d1 81 d0 ba d0 b8 d0 b9 20 d0
000000E0: b2 d0 b0 d0 bb 20 d0 b4 2e 20 31 38 31 0b 30 09
000000F0: 06 03 55 04 06 13 02 52 55 31 19 30 17 06 03 55
00000100: 04 08 0c 10 d0 b3 2e 20 d0 9c d0 be d1 81 d0 ba
00000110: d0 b2 d0 b0 31 15 30 13 06 03 55 04 07 0c 0c d0
00000120: 9c d0 be d1 81 d0 ba d0 b2 d0 b0 31 25 30 23 06
00000130: 03 55 04 0a 0c 1c d0 9e d0 9e d0 9e 20 22 d0 9a
00000140: d0 a0 d0 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0
00000150: 9e 22 31 3b 30 39 06 03 55 04 03 0c 32 d0 a2 d0
00000160: b5 d1 81 d1 82 d0 be d0 b2 d1 8b d0 b9 20 d0 a3
00000170: d0 a6 20 d0 9e d0 9e d0 9e 20 22 d0 9a d0 a0 d0
00000180: 98 d0 9f d0 a2 d0 9e 2d d0 9f d0 a0 d0 9e 22 30
00000190: 1e 17 0d 32 31 30 39 33 30 31 33 32 34 30 36 5a
000001A0: 17 0d 32 31 31 32 33 30 31 33 33 34 30 36 5a 30
000001B0: 44 31 20 30 1e 06 03 55 04 03 13 17 49 4b 45 20
000001C0: 49 6e 74 65 72 6f 70 20 54 65 73 74 20 53 65 72
000001D0: 76 65 72 31 13 30 11 06 03 55 04 0a 13 0a 45 4c
000001E0: 56 49 53 2d 50 4c 55 53 31 0b 30 00
```

(157) Extracts IV from message (fragment 2)

```
00000000: 00 00 00 00 00 00 00 01
```

(158) Uses previously computed key K3r

```
00000000: 31 95 e8 c6 67 af 42 d8 ce f1 e8 99 c6 8b 2a c2
00000010: 29 aa 3d c0 ff 18 5f 3d 79 4a 14 6b 9f ac d0 bb
```

(159) Composes MGM nonce (fragment 2)

000000000: 00 00 00 01 a5 bb 18 2f

(160) Extracts ICV from message (fragment 2)

000000000: 89 bd 07 12 fc 3f 15 8d

(161) Extracts AAD from message (fragment 2)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 02 00 04

(162) Extracts ciphertext from message (fragment 2)

```
00000000: b1 c8 8d ae d9 6f 91 7e 5a 6a 2d 8c e0 d6 28 3e
00000010: 10 59 46 12 a1 1e fa 53 c3 58 ec 4e a9 a5 92 0c
00000020: fa 5e cf a3 33 4a 8b b7 56 66 54 d9 9c 64 2e b6
00000030: 4d 03 3f 77 a8 17 88 f6 23 e0 2e 56 a6 a2 4c 4d
00000040: 6e e3 09 8a 2e 31 a1 85 1c cf ce 95 e7 73 93 8e
00000050: 9c 5a 7b 3b 49 75 96 69 d4 b0 46 f7 74 b0 0d 5d
00000060: 91 3b 6d 2b a4 46 cc 5c d9 a8 38 c0 6b ad 73 35
00000070: 09 aa c7 4c 91 8a 84 1c dd 3f e1 44 f7 c5 9c 61
00000080: 0e b7 03 6b 84 cc 8e 93 5b d5 f6 7e 71 3a f4 2c
00000090: 98 14 ad 47 e3 c3 70 dc e3 3e c0 a5 e0 e4 6d 01
000000A0: 44 78 7f e3 b7 6c cb 44 29 59 96 e9 84 6d 9d 18
000000B0: 89 66 16 07 46 a4 cd 72 a6 0e bd d2 a7 1c f7 21
000000C0: f0 d1 67 a9 0d 1c c4 c8 30 bd 26 1f 53 7d 61 8b
000000D0: ad 6f ef 3e 2c 6e 7e 69 b9 92 72 66 65 b6 06 22
000000E0: 49 a1 a8 f1 2f 02 dd 41 bf f5 d1 f6 7c 93 25 6e
000000F0: 52 8b a9 3f b5 40 97 02 bb 7c f5 33 a6 60 52 b8
00000100: 4f 3e 80 6c 38 cf e4 8b 15 fd d0 66 75 c1 bf bb
00000110: ac fc ac 01 c3 11 8e 0b 3e e9 2c 1b 5d b9 9f f6
00000120: 2f d7 e8 3c c7 a9 25 8b aa 6e c6 49 6d 6f df 42
00000130: 53 0e ba 70 54 d2 af c3 4d 02 e1 48 42 c5 45 53
00000140: 25 59 66 25 c7 3c c6 c2 e2 99 e2 bb 47 a4 a7 be
00000150: 6c 92 0d 3b 4c ab 6e d7 23 05 ea 73 07 62 e8 c0
00000160: e8 78 47 af 54 c8 67 8f dd 32 59 8d 87 ac 42 0e
00000170: 21 15 c4 f7 66 dc 02 cf 55 c2 e3 4d 8e 91 7a fd
00000180: d7 4d 20 b0 6f 67 78 58 08 9c ba 05 8b b0 9c 16
00000190: 20 51 75 12 96 e2 d5 28 ac 3e 50 26 04 6f 59 02
000001A0: 28 e0 ec 2c da 70 4a 9c 15 5a 2e 52 01 e6 4e 1e
000001B0: 10 6d 8d 5d 2a 81 69 0e 54 d0 5e 13 82 82 84 9a
000001C0: ac a6 0e 69 4e 17 5c c1 8a 71 f8 b4 80 3b 7a e5
000001D0: b8 1f 09 4a 02 14 24 07 af 6a 14 d9 52 8e da d3
000001E0: 58 23 68 71 27 b2 9a 03 09 f7 80 51
```

- (163) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext (fragment 2)

```
00000000: 09 06 03 55 04 06 13 02 52 55 30 66 30 1f 06 08
00000010: 2a 85 03 07 01 01 01 01 30 13 06 07 2a 85 03 02
00000020: 02 24 00 06 08 2a 85 03 07 01 01 02 02 03 43 00
00000030: 04 40 5b b3 14 3e f4 70 c1 70 d7 f3 27 25 d8 53
00000040: 7c e6 de 6d 8c 29 f6 b2 32 64 56 dc b1 77 f2 3d
00000050: fa f4 2a 5c f3 74 86 7f 04 72 51 c1 cf b3 43 36
00000060: f5 95 a2 af 05 47 57 1a 55 c0 78 a4 9d 64 26 b8
00000070: 61 14 a3 82 02 59 30 82 02 55 30 0e 06 03 55 1d
00000080: 0f 01 01 ff 04 04 03 02 05 a0 30 13 06 03 55 1d
00000090: 25 04 0c 30 0a 06 08 2b 06 01 05 05 07 03 11 30
000000A0: 1d 06 03 55 1d 0e 04 16 04 14 e0 d3 f0 09 ad ce
000000B0: 6c a5 47 ba 9b f7 a6 a5 1b 06 14 ba a5 43 30 1f
000000C0: 06 03 55 1d 23 04 18 30 16 80 14 9b 85 5e fb 81
000000D0: dc 4d 59 07 51 63 cf be df da 2c 7f c9 44 3c 30
000000E0: 82 01 0f 06 03 55 1d 1f 04 82 01 06 30 82 01 02
000000F0: 30 81 ff a0 81 fc a0 81 f9 86 81 b5 68 74 74 70
00000100: 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31 32 2e
00000110: 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 43 65 72
00000120: 74 45 6e 72 6f 6c 6c 2f 21 30 34 32 32 21 30 34
00000130: 33 35 21 30 34 34 31 21 30 34 34 32 21 30 34 33
00000140: 65 21 30 34 33 32 21 30 34 34 62 21 30 34 33 39
00000150: 25 32 30 21 30 34 32 33 21 30 34 32 36 25 32 30
00000160: 21 30 34 31 65 21 30 34 31 65 21 30 34 31 65 25
00000170: 32 30 21 30 30 32 32 21 30 34 31 61 21 30 34 32
00000180: 30 21 30 34 31 38 21 30 34 31 66 21 30 34 32 32
00000190: 21 30 34 31 65 2d 21 30 34 31 66 21 30 34 32 30
000001A0: 21 30 34 31 65 21 30 30 32 32 28 31 29 2e 63 72
000001B0: 6c 86 3f 68 74 74 70 3a 2f 2f 74 65 73 74 67 6f
000001C0: 73 74 32 30 31 32 2e 63 72 79 70 74 6f 70 72 6f
000001D0: 2e 72 75 2f 43 65 72 74 45 6e 72 6f 6c 6c 2f 74
000001E0: 65 73 74 67 6f 73 74 32 30 31 32 00
```

(164) Extracts IV from message (fragment 3)

```
00000000: 00 00 00 00 00 00 00 02
```

(165) Uses previously computed key K3r

```
00000000: 31 95 e8 c6 67 af 42 d8 ce f1 e8 99 c6 8b 2a c2
00000010: 29 aa 3d c0 ff 18 5f 3d 79 4a 14 6b 9f ac d0 bb
```

(166) Composes MGM nonce (fragment 3)

000000000: 00 00 00 02 a5 bb 18 2f

(167) Extracts ICV from message (fragment 3)

000000000: 7d 7c 57 8f 91 d0 c9 eb

(168) Extracts AAD from message (fragment 3)

000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e
000000010: 35 20 23 20 00 00 00 01 00 00 02 20 00 00 02 04
000000020: 00 03 00 04

(169) Extracts ciphertext from message (fragment 3)

```
000000000: 08 e0 86 04 1f 8a c9 b5 68 cd 96 10 ab 59 99 3a
00000010: 54 7b a9 fa d7 60 46 ec c3 bf bd 8f fa 03 ed 41
00000020: 49 13 ca 8c 9c b8 0c df 81 25 e2 30 ca cb 65 b9
00000030: 16 55 8e 67 f4 b3 7c b8 91 66 76 7c a4 15 98 a3
00000040: 3a c9 48 64 e4 ce 9f 64 67 5d bb 7c 03 23 9e c9
00000050: 81 3f da 48 ee a6 2a d8 fb ac 77 ce ed c2 a4 d9
00000060: 24 d3 71 99 fc 71 2b 6c 10 d3 c3 4b b5 37 e2 55
00000070: 5f d5 ee c0 d6 ff 66 15 8c e5 63 26 96 cd 3f 49
00000080: 2b da 51 94 55 6e 2e e5 2e d1 b4 91 81 50 85 8a
00000090: 84 bd fe 52 ec ce 1b 6b bd 7d 12 b4 de a5 88 c4
000000A0: b7 78 d3 3d 2d 46 ef dc 0f 91 43 be 08 7a ba fa
000000B0: b3 2a c2 17 30 99 79 ae 3a 00 f0 3f 47 4a 9b 11
000000C0: 4d 7b 1b 28 0a 44 5b 1a af 35 4d c3 2b 6b be 11
000000D0: 89 03 b9 de cf 37 57 53 1e a4 f3 3f ce 52 a6 d8
000000E0: 7e 9d d8 d4 2f 9f f5 8f 3c c6 cb 2f 56 e0 97 2d
000000F0: b2 0e 10 66 3b 3c ec 34 50 99 a3 7d 42 ec 96 eb
00000100: 87 48 72 2c 0a 6d af b9 4b 62 48 89 36 01 21 ab
00000110: 8e 79 10 54 9c 83 ab a9 8a 6c 37 c7 ac dc a1 7e
00000120: 41 0e 58 de da aa 95 71 fb 34 50 8a ef 37 0b c4
00000130: 56 ca 4b 2c 75 b7 c7 d9 74 22 c2 65 1a e4 4f 94
00000140: 20 f6 e9 44 f1 69 5e d2 18 d3 30 2e 85 74 25 be
00000150: 2a 88 e2 ce fe 75 ca fa 25 f9 2e 88 8c ed 6f dd
00000160: c3 c5 53 2e da 14 fd 96 28 4a b7 81 3a b3 d5 44
00000170: 26 e2 84 21 f2 5c 0a ed bf c4 34 1c a4 91 5e f3
00000180: 47 ef 0e 9e fb ee 34 95 5d 21 72 43 c9 63 af b4
00000190: f2 98 4a 36 57 77 fc e7 57 52 b2 4d bf 34 2a 98
000001A0: ea 70 cd d7 a9 da 4c 0d 19 05 d4 1e dd 36 c7 c4
000001B0: 31 54 18 2a ef 0e 30 44 97 31 15 57 cd d4 88 52
000001C0: 4e 42 c8 20 89 8d 35 7b 8e 03 96 b4 74 fb ec 3b
000001D0: 14 c2 64 49 92 f2 1f 3d ff 84 2d 92 4c b9 01 04
000001E0: 3d 0a 2a 28 33 de 43 44 6b cf 79 0e
```

- (170) Decrypts ciphertext and verifies ICV using K3r as K_msg, resulted in plaintext (fragment 3)

```
00000000: 28 31 29 2e 63 72 6c 30 81 da 06 08 2b 06 01 05  
00000010: 05 07 01 01 04 81 cd 30 81 ca 30 44 06 08 2b 06  
00000020: 01 05 05 07 30 02 86 38 68 74 74 70 3a 2f 2f 74  
00000030: 65 73 74 67 6f 73 74 32 30 31 32 2e 63 72 79 70  
00000040: 74 6f 70 72 6f 2e 72 75 2f 43 65 72 74 45 6e 72  
00000050: 6f 6c 6c 2f 72 6f 6f 74 32 30 31 38 2e 63 72 74  
00000060: 30 3f 06 08 2b 06 01 05 05 07 30 01 86 33 68 74  
00000070: 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30 31  
00000080: 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f 6f  
00000090: 63 73 70 32 30 31 32 67 2f 6f 63 73 70 2e 73 72  
000000A0: 66 30 41 06 08 2b 06 01 05 05 07 30 01 86 35 68  
000000B0: 74 74 70 3a 2f 2f 74 65 73 74 67 6f 73 74 32 30  
000000C0: 31 32 2e 63 72 79 70 74 6f 70 72 6f 2e 72 75 2f  
000000D0: 6f 63 73 70 32 30 31 32 67 73 74 2f 6f 63 73 70  
000000E0: 2e 73 72 66 30 0a 06 08 2a 85 03 07 01 01 03 02  
000000F0: 03 41 00 a5 39 5f ca 48 e1 c2 93 c1 e0 8a 64 74  
00000100: 0f 6b 86 a2 15 9b 46 29 d0 42 71 4f ce e7 52 d7  
00000110: d7 3d aa 47 ce cf 52 63 8f 26 b2 17 5f ad 96 57  
00000120: 76 ea 5f d0 87 bb 12 29 e4 06 0e e1 5f fd 59 81  
00000130: fb 34 6d 29 00 00 55 0e 00 00 00 0c 30 0a 06 08  
00000140: 2a 85 03 07 01 01 03 02 c8 40 af f7 46 6f 7b eb  
00000150: d2 b9 1c 5a 80 d0 00 93 c2 5e 44 16 40 47 f7 8e  
00000160: 61 9c da a5 16 94 83 c5 68 5f e8 4d 03 e7 c2 cd  
00000170: 08 07 b8 f3 46 66 6d 05 76 c0 d5 e7 60 1d 59 49  
00000180: 09 45 52 c4 95 a7 5a d3 29 00 00 08 00 00 40 00  
00000190: 2f 00 00 0c 00 00 40 01 00 00 00 40 21 00 00 10  
000001A0: 02 00 00 00 00 01 00 04 0a 01 01 03 2c 00 00 20  
000001B0: 00 00 00 1c 01 03 04 02 34 ff 8a 25 03 00 00 08  
000001C0: 01 00 00 21 00 00 00 08 05 00 00 00 2d 00 00 18  
000001D0: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 01 01 03  
000001E0: 0a 01 01 03 29 00 00 18 01 00 00 00
```

(171) Extracts IV from message (fragment 4)

```
00000000: 00 00 00 00 00 00 00 03
```

(172) Uses previously computed key K3r

```
00000000: 31 95 e8 c6 67 af 42 d8 ce f1 e8 99 c6 8b 2a c2  
00000010: 29 aa 3d c0 ff 18 5f 3d 79 4a 14 6b 9f ac d0 bb
```

(173) Composes MGM nonce (fragment 4)

```
000000000: 00 00 00 03 a5 bb 18 2f
```

(174) Extracts ICV from message (fragment 4)

```
000000000: 6c 27 70 e0 8a 82 bd 4b
```

(175) Extracts AAD from message (fragment 4)

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 35 20 23 20 00 00 00 01 00 00 00 5e 00 00 00 42  
000000020: 00 04 00 04
```

(176) Extracts ciphertext from message (fragment 4)

```
000000000: 81 fa 5d 7a 67 13 b7 93 f4 2c 01 b8 d1 02 8c ab  
000000010: 8e 80 47 25 6e c5 69 e3 0c 84 cd 35 9a 0f 7a cc  
000000020: 0a 92 7a 74 77 dc ba 60 ac 4a
```

(177) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext (fragment 4)

```
000000000: 00 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00  
000000010: ff 29 00 00 08 00 00 40 02 29 00 00 08 00 00 40  
000000020: 0a 00 00 00 08 00 00 40 0b 00
```

(178) Reassembles message from received fragments and parses it

```

IKE SA Auth
#9280E0822E758778.DB578D97DE119D1E.00000001 IKEv2 R=>I[1563]
4*EF[...]->E[1535]{
    IDr[78](DN){CN=IKE Interop Test Server,O=ELVIS-PLUS,C=RU},
    CERT[1211](X.509 Cert){308204...FB346D},
    AUTH[85](Sig){id-tc26-signwithdigest-gost3410-12-256[12]:
        C840AF...A75AD3},
    N[8](INITIAL_CONTACT),
    N[12](SET_WINDOW_SIZE){64},
    CP[16](REPLY){IP4.Address[4]=10.1.1.3},
    SA[32]{
        P[28](#1:ESP:34FF8A25:2#){
            Encryption=ENCR_MAGMA_MGM_KTREE,
            ESN=Off}},
        TSi[24](1#){10.1.1.3},
        TSr[24](1#){10.0.0.0-10.0.0.255},
        N[8](ADDITIONAL_TS_POSSIBLE),
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
}

```

(179) Computes prf(SK_pr, IDr)

```

00000000: 7d c8 6a 33 12 02 5c 21 1f ab dc 83 0b 01 a5 27
00000010: 82 a2 f2 1f 64 c6 e9 5e 0e c0 4c e5 d9 11 8d 8e
00000020: b9 5c ef fa b0 a3 37 75 94 20 7c e4 60 60 ed 9d
00000030: fa 5e cb 7e e7 79 05 ab fb 51 1b 03 a8 2c c5 6a

```

(180) Uses responder's public key

```

00000000: 5B B3 14 3E F4 70 C1 70 D7 F3 27 25 D8 53 7C E6
00000010: DE 6D 8C 29 F6 B2 32 64 56 DC B1 77 F2 3D FA F4
00000020: 2A 5C F3 74 86 7F 04 72 51 C1 CF B3 43 36 F5 95
00000030: A2 AF 05 47 57 1A 55 C0 78 A4 9D 64 26 B8 61 14

```

(181) Verifies signature from AUTH payload using algorithm id-tc26-signwithdigest-gost3410-12-256

```
00000000: c8 40 af f7 46 6f 7b eb d2 b9 1c 5a 80 d0 00 93  
00000010: c2 5e 44 16 40 47 f7 8e 61 9c da a5 16 94 83 c5  
00000020: 68 5f e8 4d 03 e7 c2 cd 08 07 b8 f3 46 66 6d 05  
00000030: 76 c0 d5 e7 60 1d 59 49 09 45 52 c4 95 a7 5a d3
```

(182) Computes keys for ESP SAs

```
00000000: 98 ab 7e db 78 03 a1 e6 c7 21 43 ee b9 7f 5f 56  
00000010: 45 bb 51 cd 0b b7 09 a1 af 34 02 87 69 4d 7b a0  
00000020: 1d 14 a0 cc  
00000000: 70 31 4d 57 94 8b 7e 5c 6f 29 d5 68 1b fd 43 2b  
00000010: 19 4e 64 6d 8f 8a 8d 1e ba 72 24 59 c7 0c de 81  
00000020: e2 04 84 af
```

Sub-scenario 2: IKE SA rekeying using the CREATE_CHILD_SA exchange.

Initiator	Responder
HDR, SK {SAi, Ni, KEi [,N+]}	--->
	<--- HDR, SK {SAr, Nr, KEr [,N+]}

Initiator's actions:

(1) Generates random SPIi for new IKE SA

```
00000000: fd d9 35 89 50 d5 db 22
```

(2) Generates random IKE nonce Ni

```
00000000: 2e 98 99 76 4a 67 1e d9 17 27 32 f2 6d 3a 93 3c  
00000010: 7f 21 2b 0e 59 90 cf 2a 7f 85 53 c5 ed 8a ec 37
```

(3) Generates ephemeral private key

```
000000000: 29 2c 72 52 e0 6c fd 39 1d 55 04 e9 cf af 82 29  
000000010: 89 09 ff 1c ab b2 dd a5 88 f0 34 fd 2c 57 d2 28
```

(4) Computes public key

```
000000000: 13 78 88 b1 0f 09 65 43 94 53 b7 26 5d 2a 8b 29  
000000010: 5f a9 d6 73 a2 d0 64 6c 98 0f 02 44 d5 5a 1d 13  
000000020: 7b b4 4d 18 81 c3 ee 48 35 18 a7 71 ce 4f fa 45  
000000030: b0 e9 74 63 37 58 32 7c ff a5 e4 98 b5 02 d4 ef
```

(5) Creates message

```
Create Child SA  
#9280E0822E758778.DB578D97DE119D1E.00000002 IKEv2 R<-I[213]  
E[185]{  
    SA[44]{  
        P[40](#1:IKE:FDD9358950D5DB22:3#){  
            Encryption=ENCR_MAGMA_MGM_KTREE,  
            PRF=PRF_HMAC_STREEB0G_512,  
            KE=GOST3410_2012_256},  
        NONCE[36]{2E9899...8AEC37},  
        KE[72](GOST3410_2012_256){137888...02D4EF},  
        N[12](SET_WINDOW_SIZE){4}}}
```

(6) Computes K3i (i3 = 1)

```
000000000: da 26 f7 b5 4c 4c 97 23 3f e2 cb 53 23 82 1b 2a  
000000010: 40 3c 95 e1 78 2a 8f 3d 1b 0f a4 d3 ab c3 98 3d
```

(7) Composes MGM nonce

```
000000000: 00 00 00 00 b4 e1 3e 23
```

(8) Composes AAD

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
00000010: 2e 20 24 08 00 00 00 02 00 00 00 d5 21 00 00 b9
```

(9) Composes plaintext

```
000000000: 28 00 00 2c 00 00 00 28 01 01 08 03 fd d9 35 89  
00000010: 50 d5 db 22 03 00 00 08 01 00 00 21 03 00 00 08  
00000020: 02 00 00 09 00 00 00 08 04 00 00 21 22 00 00 24  
00000030: 2e 98 99 76 4a 67 1e d9 17 27 32 f2 6d 3a 93 3c  
00000040: 7f 21 2b 0e 59 90 cf 2a 7f 85 53 c5 ed 8a ec 37  
00000050: 29 00 00 48 00 21 00 00 13 78 88 b1 0f 09 65 43  
00000060: 94 53 b7 26 5d 2a 8b 29 5f a9 d6 73 a2 d0 64 6c  
00000070: 98 0f 02 44 d5 5a 1d 13 7b b4 4d 18 81 c3 ee 48  
00000080: 35 18 a7 71 ce 4f fa 45 b0 e9 74 63 37 58 32 7c  
00000090: ff a5 e4 98 b5 02 d4 ef 00 00 00 0c 00 00 40 01  
000000A0: 00 00 00 04 00
```

(10) Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext

```
000000000: f4 d1 2b 1e 51 65 d1 0b 7f 38 c6 16 3f 6e 5e f7  
00000010: e0 48 24 15 6a 45 50 51 1a 6e fb 1c 1d b8 52 75  
00000020: 80 56 e4 da fb e5 fe 42 08 71 79 99 ef 17 7a 03  
00000030: fc c3 c6 b0 15 a5 72 a4 1b de e2 b5 e6 46 56 73  
00000040: 3f 78 57 9e 6b b4 05 4c 86 91 c3 61 00 2d 9b 89  
00000050: c0 0c 8b 11 0b 41 e7 92 16 7f f8 f6 5d ef f4 29  
00000060: 27 ef ba 8c 5f 30 fd a9 12 4c 5f 8d e9 39 97 48  
00000070: 9a e1 6a 91 01 c7 8c 94 aa 3b 89 bb 54 40 3b f1  
00000080: 8d 2b 0e 75 d8 f6 98 d2 74 e4 b7 2f f5 ac a0 41  
00000090: df 73 7f 1c 37 18 b9 79 8e 9d 6f ea e5 8a b6 9f  
000000A0: 35 d9 d4 b3 cd
```

(11)

Computes ICV using K3i as K_msg

000000000: 49 96 ac 4c 3f c4 fc 1d

(12) Composes IV

000000000: 00 00 00 00 01 00 00 00

(13) Sends message, peer receives message

10.111.10.171:54295->10.111.15.45:4500 [217]

000000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 2e 20 24 08 00 00 00 02 00 00 00 d5
00000020: 21 00 00 b9 00 00 00 00 01 00 00 00 f4 d1 2b 1e
00000030: 51 65 d1 0b 7f 38 c6 16 3f 6e 5e f7 e0 48 24 15
00000040: 6a 45 50 51 1a 6e fb 1c 1d b8 52 75 80 56 e4 da
00000050: fb e5 fe 42 08 71 79 99 ef 17 7a 03 fc c3 c6 b0
00000060: 15 a5 72 a4 1b de e2 b5 e6 46 56 73 3f 78 57 9e
00000070: 6b b4 05 4c 86 91 c3 61 00 2d 9b 89 c0 0c 8b 11
00000080: 0b 41 e7 92 16 7f f8 f6 5d ef f4 29 27 ef ba 8c
00000090: 5f 30 fd a9 12 4c 5f 8d e9 39 97 48 9a e1 6a 91
000000A0: 01 c7 8c 94 aa 3b 89 bb 54 40 3b f1 8d 2b 0e 75
000000B0: d8 f6 98 d2 74 e4 b7 2f f5 ac a0 41 df 73 7f 1c
000000C0: 37 18 b9 79 8e 9d 6f ea e5 8a b6 9f 35 d9 d4 b3
000000D0: cd 49 96 ac 4c 3f c4 fc 1d

Responder's actions:

(14) Extracts IV from message

000000000: 00 00 00 00 01 00 00 00

(15) Computes K3i (I = 1)

```
000000000: da 26 f7 b5 4c 4c 97 23 3f e2 cb 53 23 82 1b 2a  
000000010: 40 3c 95 e1 78 2a 8f 3d 1b 0f a4 d3 ab c3 98 3d
```

(16) Composes MGM nonce

```
000000000: 00 00 00 00 b4 e1 3e 23
```

(17) Extracts ICV from message

```
000000000: 49 96 ac 4c 3f c4 fc 1d
```

(18) Extracts AAD from message

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 2e 20 24 08 00 00 00 02 00 00 00 d5 21 00 00 b9
```

(19) Extracts ciphertext from message

```
000000000: f4 d1 2b 1e 51 65 d1 0b 7f 38 c6 16 3f 6e 5e f7  
000000010: e0 48 24 15 6a 45 50 51 1a 6e fb 1c 1d b8 52 75  
000000020: 80 56 e4 da fb e5 fe 42 08 71 79 99 ef 17 7a 03  
000000030: fc c3 c6 b0 15 a5 72 a4 1b de e2 b5 e6 46 56 73  
000000040: 3f 78 57 9e 6b b4 05 4c 86 91 c3 61 00 2d 9b 89  
000000050: c0 0c 8b 11 0b 41 e7 92 16 7f f8 f6 5d ef f4 29  
000000060: 27 ef ba 8c 5f 30 fd a9 12 4c 5f 8d e9 39 97 48  
000000070: 9a e1 6a 91 01 c7 8c 94 aa 3b 89 bb 54 40 3b f1  
000000080: 8d 2b 0e 75 d8 f6 98 d2 74 e4 b7 2f f5 ac a0 41  
000000090: df 73 7f 1c 37 18 b9 79 8e 9d 6f ea e5 8a b6 9f  
0000000A0: 35 d9 d4 b3 cd
```

- (20) Decrypts ciphertext and verifies ICV using K_{3i} as K_{msg}, resulted in plaintext

```
00000000: 28 00 00 2c 00 00 00 28 01 01 08 03 fd d9 35 89
00000010: 50 d5 db 22 03 00 00 08 01 00 00 21 03 00 00 08
00000020: 02 00 00 09 00 00 00 08 04 00 00 21 22 00 00 24
00000030: 2e 98 99 76 4a 67 1e d9 17 27 32 f2 6d 3a 93 3c
00000040: 7f 21 2b 0e 59 90 cf 2a 7f 85 53 c5 ed 8a ec 37
00000050: 29 00 00 48 00 21 00 00 13 78 88 b1 0f 09 65 43
00000060: 94 53 b7 26 5d 2a 8b 29 5f a9 d6 73 a2 d0 64 6c
00000070: 98 0f 02 44 d5 5a 1d 13 7b b4 4d 18 81 c3 ee 48
00000080: 35 18 a7 71 ce 4f fa 45 b0 e9 74 63 37 58 32 7c
00000090: ff a5 e4 98 b5 02 d4 ef 00 00 00 0c 00 00 40 01
000000A0: 00 00 00 04 00
```

- (21) Parses received message

```
Create Child SA
#9280E0822E758778.DB578D97DE119D1E.00000002 IKEv2 I->R[213]
E[185]{
SA[44]{
P[40](#1:IKE:FDD9358950D5DB22:3#){
Encryption=ENCR_MAGMA_MGM_KTREE,
PRF=PRF_HMAC_STREEB0G_512,
KE=GOST3410_2012_256}}),
NONCE[36]{2E9899...8AEC37},
KE[72](GOST3410_2012_256){137888...02D4EF},
N[12](SET_WINDOW_SIZE){4}}
```

- (22) Generates random SPIr for new IKE SA

```
00000000: 81 27 5d a2 98 90 1a 06
```

- (23) Generates random IKE nonce Nr

```
00000000: cf 8e 80 0f 84 c9 d8 50 06 a4 02 b5 19 2a 0f a0  
00000010: d7 f4 db 70 ca f1 2b 9b 02 ce 92 8d 97 20 43 96
```

(24) Generates ephemeral private key

```
00000000: af 9a 62 7d d3 b8 23 d2 49 7f f9 0a 9d f2 55 8c  
00000010: ae 9c 48 ad f5 a4 ee a5 f6 24 5f 48 3c f8 42 0d
```

(25) Computes public key

```
00000000: ba 9c bb 8d c4 51 68 1c 63 50 9c 5b 78 c2 93 be  
00000010: 52 9b 7a a0 6b 14 1e 0f 52 d4 a3 0e 71 d7 5b 4c  
00000020: aa 58 af 26 21 d9 b2 92 87 1c d9 7a 89 6f c2 7d  
00000030: 7d 95 96 39 a2 36 37 8f f4 b9 1d 2f a8 b7 f5 c9
```

(26) Computes shared key

```
00000000: ae 27 a3 df af 7d bb ad f4 5c 19 64 c9 27 eb 41  
00000010: 14 fc 1a f8 25 cc 93 50 a2 64 5f 04 67 0a 74 cb
```

(27) Computes SKEYSEED for new SA

```
00000000: 31 2b 7f 6a 24 23 8f ed b6 ac 40 a7 58 2e 28 54  
00000010: 47 53 76 20 05 c7 00 c8 87 c1 51 68 93 40 7e 2d  
00000020: ed 14 c4 78 9a f4 12 e7 f0 19 4d 4d 12 45 0d 42  
00000030: e4 b2 29 e5 57 b4 90 cc cf d5 94 84 b4 59 5e b9
```

(28) Computes SK_d for new SA

```
00000000: 38 ec b5 1c 33 77 f8 62 29 9f 00 d9 98 5f a4 4c  
00000010: ea c7 97 31 01 b9 39 ce 16 2c 1c 30 dd 53 d8 97  
00000020: 48 49 cd ca 82 7b 57 55 e4 5a 33 1c 80 e6 b9 1f  
00000030: 2c 80 b2 e5 48 8a 23 9d 8e 42 32 ed 4f 63 3a f1
```

(29) Computes SK_ei for new SA

```
00000000: 17 1c 7c 08 bd 1a 3d 50 58 e1 13 58 9d c4 21 c6  
00000010: a3 44 e5 c1 f5 14 e8 22 ed 94 03 2e 76 47 b1 8d  
00000020: 2b 3d 3b 2f
```

(30) Computes SK_er for new SA

```
00000000: 4a a9 b7 36 1d 2c e1 e0 dc 55 b6 45 0a 38 f1 9a  
00000010: 83 cb 8f 79 57 5e df d8 5f 5e 22 a8 36 bd 3a 4a  
00000020: d2 f6 27 21
```

(31) Creates message

```
Create Child SA  
#9280E0822E758778.DB578D97DE119D1E.00000002 IKEv2 I<=R[213]  
E[185]{  
    SA[44]{  
        P[40](#1:IKE:81275DA298901A06:3#){  
            Encryption=ENCR_MAGMA_MGM_KTREE,  
            PRF=PRF_HMAC_STREEBOG_512,  
            KE=GOST3410_2012_256}}},  
    NONCE[36]{CF8E80...204396},  
    KE[72](GOST3410_2012_256){BA9CBB...B7F5C9},  
    N[12](SET_WINDOW_SIZE){64}}
```

(32) Computes K3r (i3 = 1)

```
000000000: 9b 6c de 40 b4 63 c4 85 db 09 b7 24 f4 60 fa d0  
000000010: 1f d3 f3 fa e9 f8 e9 03 0c 34 cb 51 52 51 5b 56
```

(33) Composes MGM nonce

```
000000000: 00 00 00 00 a5 bb 18 2f
```

(34) Composes AAD

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
000000010: 2e 20 24 20 00 00 00 02 00 00 00 d5 21 00 00 b9
```

(35) Composes plaintext

```
000000000: 28 00 00 2c 00 00 00 28 01 01 08 03 81 27 5d a2  
000000010: 98 90 1a 06 03 00 00 08 01 00 00 21 03 00 00 08  
000000020: 02 00 00 09 00 00 00 08 04 00 00 21 22 00 00 24  
000000030: cf 8e 80 0f 84 c9 d8 50 06 a4 02 b5 19 2a 0f a0  
000000040: d7 f4 db 70 ca f1 2b 9b 02 ce 92 8d 97 20 43 96  
000000050: 29 00 00 48 00 21 00 00 ba 9c bb 8d c4 51 68 1c  
000000060: 63 50 9c 5b 78 c2 93 be 52 9b 7a a0 6b 14 1e 0f  
000000070: 52 d4 a3 0e 71 d7 5b 4c aa 58 af 26 21 d9 b2 92  
000000080: 87 1c d9 7a 89 6f c2 7d 7d 95 96 39 a2 36 37 8f  
000000090: f4 b9 1d 2f a8 b7 f5 c9 00 00 00 0c 00 00 40 01  
0000000A0: 00 00 00 40 00
```

(36) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

```
00000000: 6e a0 bc 5e 58 16 91 db 1f e0 22 20 b6 75 fd e6
00000010: e0 01 a7 86 0c 9c a6 77 ef cd f6 be e4 c8 31 18
00000020: c7 7f 68 58 d8 85 75 6c 1d 4a 0e 66 09 86 7c 84
00000030: 30 a7 2e f0 26 2b 19 da c5 25 34 5b 19 f0 97 86
00000040: 54 ca 08 92 65 9c e3 92 4d ee 92 0a a0 86 d7 3f
00000050: 4d d9 f2 7e 32 48 b3 9f ea 54 d2 96 99 42 30 6b
00000060: b0 b4 fe 5d 4a fc 8c ff 54 f6 2f b7 ca 7b 83 01
00000070: 36 85 57 78 b3 74 84 72 9d 94 2f 6f ae 4e 26 bb
00000080: 6e 06 84 2b ac f8 99 29 31 ad 7b dc db c0 0f 19
00000090: 5f 06 42 2d 90 d2 6a 05 8a 41 ee 24 e2 49 a5 b6
000000A0: 61 e8 cb 46 3c
```

(37) Computes ICV using K3r as K_msg

```
00000000: dc c4 ca 6d 07 cf 31 a8
```

(38) Composes IV

```
00000000: 00 00 00 00 01 00 00 00
```

(39) Sends message, peer receives message

10.111.10.171:54295<-10.111.15.45:4500 [217]

```
00000000: 00 00 00 00 92 80 e0 82 2e 75 87 78 db 57 8d 97
00000010: de 11 9d 1e 2e 20 24 20 00 00 00 02 00 00 00 d5
00000020: 21 00 00 b9 00 00 00 00 01 00 00 00 6e a0 bc 5e
00000030: 58 16 91 db 1f e0 22 20 b6 75 fd e6 e0 01 a7 86
00000040: 0c 9c a6 77 ef cd f6 be e4 c8 31 18 c7 7f 68 58
00000050: d8 85 75 6c 1d 4a 0e 66 09 86 7c 84 30 a7 2e f0
00000060: 26 2b 19 da c5 25 34 5b 19 f0 97 86 54 ca 08 92
00000070: 65 9c e3 92 4d ee 92 0a a0 86 d7 3f 4d d9 f2 7e
00000080: 32 48 b3 9f ea 54 d2 96 99 42 30 6b b0 b4 fe 5d
00000090: 4a fc 8c ff 54 f6 2f b7 ca 7b 83 01 36 85 57 78
000000A0: b3 74 84 72 9d 94 2f 6f ae 4e 26 bb 6e 06 84 2b
000000B0: ac f8 99 29 31 ad 7b dc db c0 0f 19 5f 06 42 2d
000000C0: 90 d2 6a 05 8a 41 ee 24 e2 49 a5 b6 61 e8 cb 46
000000D0: 3c dc c4 ca 6d 07 cf 31 a8
```

Initiator's actions:

(40) Extracts IV from message

```
00000000: 00 00 00 00 01 00 00 00
```

(41) Computes K3r (i3 = 1)

```
00000000: 9b 6c de 40 b4 63 c4 85 db 09 b7 24 f4 60 fa d0
00000010: 1f d3 f3 fa e9 f8 e9 03 0c 34 cb 51 52 51 5b 56
```

(42) Composes MGM nonce

```
00000000: 00 00 00 00 a5 bb 18 2f
```

(43) Extracts ICV from message

```
000000000: dc c4 ca 6d 07 cf 31 a8
```

(44) Extracts AAD from message

```
000000000: 92 80 e0 82 2e 75 87 78 db 57 8d 97 de 11 9d 1e  
00000010: 2e 20 24 20 00 00 00 02 00 00 00 d5 21 00 00 b9
```

(45) Extracts ciphertext from message

```
000000000: 6e a0 bc 5e 58 16 91 db 1f e0 22 20 b6 75 fd e6  
00000010: e0 01 a7 86 0c 9c a6 77 ef cd f6 be e4 c8 31 18  
00000020: c7 7f 68 58 d8 85 75 6c 1d 4a 0e 66 09 86 7c 84  
00000030: 30 a7 2e f0 26 2b 19 da c5 25 34 5b 19 f0 97 86  
00000040: 54 ca 08 92 65 9c e3 92 4d ee 92 0a a0 86 d7 3f  
00000050: 4d d9 f2 7e 32 48 b3 9f ea 54 d2 96 99 42 30 6b  
00000060: b0 b4 fe 5d 4a fc 8c ff 54 f6 2f b7 ca 7b 83 01  
00000070: 36 85 57 78 b3 74 84 72 9d 94 2f 6f ae 4e 26 bb  
00000080: 6e 06 84 2b ac f8 99 29 31 ad 7b dc db c0 0f 19  
00000090: 5f 06 42 2d 90 d2 6a 05 8a 41 ee 24 e2 49 a5 b6  
000000A0: 61 e8 cb 46 3c
```

(46) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext

```
000000000: 28 00 00 2c 00 00 00 28 01 01 08 03 81 27 5d a2  
00000010: 98 90 1a 06 03 00 00 08 01 00 00 21 03 00 00 08  
00000020: 02 00 00 09 00 00 00 08 04 00 00 21 22 00 00 24  
00000030: cf 8e 80 0f 84 c9 d8 50 06 a4 02 b5 19 2a 0f a0  
00000040: d7 f4 db 70 ca f1 2b 9b 02 ce 92 8d 97 20 43 96  
00000050: 29 00 00 48 00 21 00 00 ba 9c bb 8d c4 51 68 1c  
00000060: 63 50 9c 5b 78 c2 93 be 52 9b 7a a0 6b 14 1e 0f  
00000070: 52 d4 a3 0e 71 d7 5b 4c aa 58 af 26 21 d9 b2 92  
00000080: 87 1c d9 7a 89 6f c2 7d 7d 95 96 39 a2 36 37 8f  
00000090: f4 b9 1d 2f a8 b7 f5 c9 00 00 00 0c 00 00 40 01  
000000A0: 00 00 00 40 00
```

(47) Parses received message

```
Create Child SA
#9280E0822E758778.DB578D97DE119D1E.00000002 IKEv2 R=>I[213]
E[185]{
    SA[44]{
        P[40](#1:IKE:81275DA298901A06:3#){
            Encryption=ENCR_MAGMA_MGM_KTREE,
            PRF=PRF_HMAC_STREEBOG_512,
            KE=GOST3410_2012_256},
        NONCE[36]{CF8E80...204396},
        KE[72](GOST3410_2012_256){BA9CBB...B7F5C9},
        N[12](SET_WINDOW_SIZE){64}}
```

(48) Computes shared key

```
00000000: ae 27 a3 df af 7d bb ad f4 5c 19 64 c9 27 eb 41
00000010: 14 fc 1a f8 25 cc 93 50 a2 64 5f 04 67 0a 74 cb
```

(49) Computes SKEYSEED for new SA

```
00000000: 31 2b 7f 6a 24 23 8f ed b6 ac 40 a7 58 2e 28 54
00000010: 47 53 76 20 05 c7 00 c8 87 c1 51 68 93 40 7e 2d
00000020: ed 14 c4 78 9a f4 12 e7 f0 19 4d 4d 12 45 0d 42
00000030: e4 b2 29 e5 57 b4 90 cc cf d5 94 84 b4 59 5e b9
```

(50) Computes SK_d for new SA

```
00000000: 38 ec b5 1c 33 77 f8 62 29 9f 00 d9 98 5f a4 4c
00000010: ea c7 97 31 01 b9 39 ce 16 2c 1c 30 dd 53 d8 97
00000020: 48 49 cd ca 82 7b 57 55 e4 5a 33 1c 80 e6 b9 1f
00000030: 2c 80 b2 e5 48 8a 23 9d 8e 42 32 ed 4f 63 3a f1
```

(51)

Computes SK_ei for new SA

```
00000000: 17 1c 7c 08 bd 1a 3d 50 58 e1 13 58 9d c4 21 c6  
00000010: a3 44 e5 c1 f5 14 e8 22 ed 94 03 2e 76 47 b1 8d  
00000020: 2b 3d 3b 2f
```

(52) Computes SK_er for new SA

```
00000000: 4a a9 b7 36 1d 2c e1 e0 dc 55 b6 45 0a 38 f1 9a  
00000010: 83 cb 8f 79 57 5e df d8 5f 5e 22 a8 36 bd 3a 4a  
00000020: d2 f6 27 21
```

Sub-scenario 3: ESP SAs rekeying without PFS using the CREATE_CHILD_SA exchange.

Initiator

Responder

```
HDR, SK {N(REKEY_SA), SAI, Ni,  
TSi, TSr [,N+] }           --->  
                           <---   HDR, SK {SAr, Nr,  
TSi, TSr [,N+] }
```

Initiator's actions:

(1) Generates random IKE nonce Ni

```
00000000: b5 48 18 7d 30 d8 ea 49 20 d0 9d 42 de 9e 91 ce  
00000010: b3 1c 41 85 37 66 d8 9e c6 a6 f8 08 93 f4 48 23
```

(2) Computes K1i (i1 = 0)

```
00000000: 28 b9 3c 93 ea db 74 38 64 87 8a 28 8d e0 38 5c  
00000010: 14 cb ea 9f 67 58 a6 ee e2 2d c9 37 bb c8 41 69
```

(3) Computes K2i (i2 = 0)

```
00000000: 75 11 35 65 e6 29 70 2a d9 7d 38 a8 3a e3 aa 8a  
00000010: 9e fb 80 af f5 52 71 be c9 c6 c3 4b 4b 40 96 44
```

(4) Computes K3i (i3 = 0)

```
00000000: 45 6f 03 f7 ad 75 eb e9 52 b8 8f 0d e8 36 47 69  
00000010: 4d 2e f2 ba 15 e6 8c 89 1c 99 62 64 fb 0e 70 0a
```

(5) Selects SPI for new incoming ESP SA

```
00000000: 9a 8c 6a 9b
```

(6) Creates message

```
Create Child SA  
#FDD9358950D5DB22.81275DA298901A06.00000000 IKEv2 R<-I[193]  
E[165]{  
    N[12](ESP:6C0CA570:REKEY_SA),  
    SA[32]{  
        P[28](#1:ESP:9A8C6A9B:2#){  
            Encryption=ENCR_MAGMA_MGM_KTREE,  
            ESN=Off},  
        NONCE[36]{B54818...F44823},  
        TSi[24](1#{10.1.1.3},  
        TSr[24](1#{10.0.0.0-10.0.0.255},  
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(7) Composes MGM nonce

```
0000000000: 00 00 00 00 2b 3d 3b 2f
```

(8) Composes AAD

```
0000000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
000000010: 2e 20 24 08 00 00 00 00 00 00 c1 29 00 00 a5
```

(9) Composes plaintext

```
0000000000: 21 00 00 0c 03 04 40 09 6c 0c a5 70 28 00 00 20  
000000010: 00 00 00 1c 01 03 04 02 9a 8c 6a 9b 03 00 00 08  
000000020: 01 00 00 21 00 00 00 08 05 00 00 00 00 2c 00 00 24  
000000030: b5 48 18 7d 30 d8 ea 49 20 d0 9d 42 de 9e 91 ce  
000000040: b3 1c 41 85 37 66 d8 9e c6 a6 f8 08 93 f4 48 23  
000000050: 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff ff  
000000060: 0a 01 01 03 0a 01 01 03 29 00 00 18 01 00 00 00  
000000070: 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00 ff  
000000080: 29 00 00 08 00 00 40 0a 00 00 00 08 00 00 40 0b  
000000090: 00
```

(10) Encrypts plaintext using K3i as K_msg, resulted in ciphertext

```
0000000000: 47 71 bb 57 2a 1a 58 a6 44 cb 60 d4 8e 5c cc 0a  
000000010: b9 34 0f 34 80 cf a2 38 54 f6 70 3b 98 4e 8f 9f  
000000020: 3b 5c 5a 04 06 dc e9 d4 d3 54 c6 4d 73 09 10 c5  
000000030: 4e 26 c4 27 fd cb 54 e1 cf e0 fd b4 9f f8 00 41  
000000040: 41 c8 58 b2 c9 3a d8 e0 19 40 a3 89 ee 26 d4 84  
000000050: 69 e9 52 68 d5 e1 ee f0 89 6e d3 95 34 62 ad 2e  
000000060: e6 77 17 b8 6c 25 52 7f d8 70 9c 36 0b c8 1d 1a  
000000070: 43 50 82 2a be b6 31 ff 2f 43 11 f7 d0 60 bf 62  
000000080: b9 08 c3 09 a3 78 fb 5e 76 57 91 5d 48 1c aa d2  
000000090: a3
```

(11) Computes ICV using K3i as K_msg

000000000: b3 05 bd 43 2f 87 0c 3f

(12) Composes IV

000000000: 00 00 00 00 00 00 00 00

(13) Sends message, peer receives message

10.111.10.171:54295->10.111.15.45:4500 [197]

000000000: 00 00 00 00 fd d9 35 89 50 d5 db 22 81 27 5d a2
00000010: 98 90 1a 06 2e 20 24 08 00 00 00 00 00 00 00 c1
00000020: 29 00 00 a5 00 00 00 00 00 00 00 00 00 47 71 bb 57
00000030: 2a 1a 58 a6 44 cb 60 d4 8e 5c cc 0a b9 34 0f 34
00000040: 80 cf a2 38 54 f6 70 3b 98 4e 8f 9f 3b 5c 5a 04
00000050: 06 dc e9 d4 d3 54 c6 4d 73 09 10 c5 4e 26 c4 27
00000060: fd cb 54 e1 cf e0 fd b4 9f f8 00 41 41 c8 58 b2
00000070: c9 3a d8 e0 19 40 a3 89 ee 26 d4 84 69 e9 52 68
00000080: d5 e1 ee f0 89 6e d3 95 34 62 ad 2e e6 77 17 b8
00000090: 6c 25 52 7f d8 70 9c 36 0b c8 1d 1a 43 50 82 2a
000000A0: be b6 31 ff 2f 43 11 f7 d0 60 bf 62 b9 08 c3 09
000000B0: a3 78 fb 5e 76 57 91 5d 48 1c aa d2 a3 b3 05 bd
000000C0: 43 2f 87 0c 3f

Responder's actions:

(14) Extracts IV from message

000000000: 00 00 00 00 00 00 00 00

(15) Computes K1i (i1 = 0)

```
000000000: 28 b9 3c 93 ea db 74 38 64 87 8a 28 8d e0 38 5c  
000000010: 14 cb ea 9f 67 58 a6 ee e2 2d c9 37 bb c8 41 69
```

(16) Computes K2i (i2 = 0)

```
000000000: 75 11 35 65 e6 29 70 2a d9 7d 38 a8 3a e3 aa 8a  
000000010: 9e fb 80 af f5 52 71 be c9 c6 c3 4b 4b 40 96 44
```

(17) Computes K3i (i3 = 0)

```
000000000: 45 6f 03 f7 ad 75 eb e9 52 b8 8f 0d e8 36 47 69  
000000010: 4d 2e f2 ba 15 e6 8c 89 1c 99 62 64 fb 0e 70 0a
```

(18) Composes MGM nonce

```
000000000: 00 00 00 00 2b 3d 3b 2f
```

(19) Extracts ICV from message

```
000000000: b3 05 bd 43 2f 87 0c 3f
```

(20) Extracts AAD from message

```
000000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
000000010: 2e 20 24 08 00 00 00 00 00 00 00 c1 29 00 00 a5
```

(21) Extracts ciphertext from message

```
00000000: 47 71 bb 57 2a 1a 58 a6 44 cb 60 d4 8e 5c cc 0a
00000010: b9 34 0f 34 80 cf a2 38 54 f6 70 3b 98 4e 8f 9f
00000020: 3b 5c 5a 04 06 dc e9 d4 d3 54 c6 4d 73 09 10 c5
00000030: 4e 26 c4 27 fd cb 54 e1 cf e0 fd b4 9f f8 00 41
00000040: 41 c8 58 b2 c9 3a d8 e0 19 40 a3 89 ee 26 d4 84
00000050: 69 e9 52 68 d5 e1 ee f0 89 6e d3 95 34 62 ad 2e
00000060: e6 77 17 b8 6c 25 52 7f d8 70 9c 36 0b c8 1d 1a
00000070: 43 50 82 2a be b6 31 ff 2f 43 11 f7 d0 60 bf 62
00000080: b9 08 c3 09 a3 78 fb 5e 76 57 91 5d 48 1c aa d2
00000090: a3
```

- (22) Decrypts ciphertext and verifies ICV using K3i as K_msg, resulted in plaintext

```
00000000: 21 00 00 0c 03 04 40 09 6c 0c a5 70 28 00 00 20
00000010: 00 00 00 1c 01 03 04 02 9a 8c 6a 9b 03 00 00 08
00000020: 01 00 00 21 00 00 00 08 05 00 00 00 00 2c 00 00 24
00000030: b5 48 18 7d 30 d8 ea 49 20 d0 9d 42 de 9e 91 ce
00000040: b3 1c 41 85 37 66 d8 9e c6 a6 f8 08 93 f4 48 23
00000050: 2d 00 00 18 01 00 00 00 07 00 00 10 00 00 ff ff
00000060: 0a 01 01 03 0a 01 01 03 29 00 00 18 01 00 00 00
00000070: 07 00 00 10 00 00 ff ff 0a 00 00 00 0a 00 00 ff
00000080: 29 00 00 08 00 00 40 0a 00 00 00 08 00 00 40 0b
00000090: 00
```

- (23) Parses received message

```
Create Child SA
#FDD9358950D5DB22.81275DA298901A06.00000000 IKEv2 I->R[193]
E[165]{
    N[12](ESP:6C0CA570:REKEY_SA),
    SA[32]{
        P[28](#1:ESP:9A8C6A9B:2#){
            Encryption=ENCR_MAGMA_MGM_KTREE,
            ESN=Off}},
        NONCE[36]{B54818...F44823},
        TSi[24](1#){10.1.1.3},
        TSr[24](1#){10.0.0.0-10.0.0.255},
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(24) Generates random IKE nonce Nr

```
000000000: 41 5e a7 ed 7e 65 d3 ff d3 df ed 5f b5 c8 5c 60  
000000010: 2b 9c 15 14 eb 52 97 b7 fc aa 33 c4 64 f3 58 06
```

(25) Selects SPI for new incoming ESP SA

```
000000000: 15 4f 35 39
```

(26) Computes keys for new ESP SAs

```
000000000: 6a b6 a0 e7 05 d3 51 16 6f 4f b9 d6 59 0c c8 69  
000000010: 43 70 cf 6f 0d 32 c3 7d 92 75 00 4b 0a 76 35 67  
000000020: 64 0e 3a fe  
000000000: 65 56 1c 79 27 cb c6 d6 8c b8 69 0f 40 00 d2 0a  
000000010: c1 49 1c d1 86 88 db 88 ae f3 be 82 0c 71 b7 c9  
000000020: 6c cf a3 64
```

(27) Creates message

```
Create Child SA  
#FDD9358950D5DB22.81275DA298901A06.00000000 IKEv2 I<=R[189]  
E[161]{  
    SA[32]{  
        P[28](#1:ESP:154F3539:2#){  
            Encryption=ENCR_MAGMA_MGM_KTREE,  
            ESN=Off}}},  
    NONCE[36]{415EA7...F35806},  
    TSi[24](1#){10.1.1.3},  
    TSr[24](1#){10.0.0.0-10.0.0.255},  
    N[8](ADDITIONAL_TS_POSSIBLE),  
    N[8](ESP_TFC_PADDING_NOT_SUPPORTED),  
    N[8](NON_FIRST_FRAGMENTS_ALSO)}
```

(28)

Computes K1r (i1 = 0)

```
000000000: 51 49 d5 41 33 91 45 dd ff 04 f5 05 e5 21 39 f2  
000000010: 3a 71 1c 18 ef 39 94 1e dd 0c 70 e5 14 12 43 0a
```

(29) Computes K2r (i2 = 0)

```
000000000: 0e 8f 21 54 2e fc 81 79 57 c4 c9 0b e0 25 9a 59  
000000010: 29 26 0e 86 20 bf d4 e6 00 32 23 43 ae f0 11 52
```

(30) Computes K3r (i3 = 0)

```
000000000: 92 b8 b2 d6 7a 2d e1 db 5f e1 39 d2 57 c8 24 5f  
000000010: f6 22 54 de fc 35 35 c9 24 cf a5 4a e1 5d 75 71
```

(31) Composes MGM nonce

```
000000000: 00 00 00 00 d2 f6 27 21
```

(32) Composes AAD

```
000000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
000000010: 2e 20 24 20 00 00 00 00 00 00 00 bd 21 00 00 a1
```

(33) Composes plaintext

```
00000000: 28 00 00 20 00 00 00 1c 01 03 04 02 15 4f 35 39  
00000010: 03 00 00 08 01 00 00 21 00 00 00 08 05 00 00 00  
00000020: 2c 00 00 24 41 5e a7 ed 7e 65 d3 ff d3 df ed 5f  
00000030: b5 c8 5c 60 2b 9c 15 14 eb 52 97 b7 fc aa 33 c4  
00000040: 64 f3 58 06 2d 00 00 18 01 00 00 00 07 00 00 10  
00000050: 00 00 ff ff 0a 01 01 03 0a 01 01 03 29 00 00 18  
00000060: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 00 00 00  
00000070: 0a 00 00 ff 29 00 00 08 00 00 40 02 29 00 00 08  
00000080: 00 00 40 0a 00 00 00 08 00 00 40 0b 00
```

(34) Encrypts plaintext using K_{3r} as K_{msg}, resulted in ciphertext

```
00000000: 2e c7 13 73 4c cc f8 f3 51 71 ac d9 7a 6e 20 2c  
00000010: 68 70 bb 8f 82 42 2a 14 e3 8d b8 25 10 9a 1f b6  
00000020: 51 ef c5 35 50 bf df 8e 96 bc 94 5a e5 4d 9d 99  
00000030: 9a 14 36 d1 4b 61 e1 de 3b 0d 12 94 e5 72 60 00  
00000040: 0f 9d dd 2b e1 97 25 4c 5c ee 48 2e 9b f7 d8 9e  
00000050: 01 6b 1d 92 b7 c1 7f 16 81 0f e2 e3 14 1c 27 c7  
00000060: 35 e9 e3 fd b8 fc 5d fb a2 ee 2f f9 b0 17 39 ca  
00000070: f1 2e b1 13 99 e0 da 10 1a 29 74 26 a3 63 ce 09  
00000080: 6a f9 1b 67 4a f2 fb 0f 17 5e 48 1a 93
```

(35) Computes ICV using K_{3r} as K_{msg}

```
00000000: 57 b4 30 41 07 50 b1 cc
```

(36) Composes IV

```
00000000: 00 00 00 00 00 00 00 00
```

(37) Sends message, peer receives message

10.111.10.171:54295<-10.111.15.45:4500 [193]

```
00000000: 00 00 00 00 fd d9 35 89 50 d5 db 22 81 27 5d a2
00000010: 98 90 1a 06 2e 20 24 20 00 00 00 00 00 00 00 bd
00000020: 21 00 00 a1 00 00 00 00 00 00 00 00 2e c7 13 73
00000030: 4c cc f8 f3 51 71 ac d9 7a 6e 20 2c 68 70 bb 8f
00000040: 82 42 2a 14 e3 8d b8 25 10 9a 1f b6 51 ef c5 35
00000050: 50 bf df 8e 96 bc 94 5a e5 4d 9d 99 9a 14 36 d1
00000060: 4b 61 e1 de 3b 0d 12 94 e5 72 60 00 0f 9d dd 2b
00000070: e1 97 25 4c 5c ee 48 2e 9b f7 d8 9e 01 6b 1d 92
00000080: b7 c1 7f 16 81 0f e2 e3 14 1c 27 c7 35 e9 e3 fd
00000090: b8 fc 5d fb a2 ee 2f f9 b0 17 39 ca f1 2e b1 13
000000A0: 99 e0 da 10 1a 29 74 26 a3 63 ce 09 6a f9 1b 67
000000B0: 4a f2 fb 0f 17 5e 48 1a 93 57 b4 30 41 07 50 b1
000000C0: cc
```

Initiator's actions:

(38) Extracts IV from message

```
00000000: 00 00 00 00 00 00 00 00 00
```

(39) Computes K1r (i1 = 0)

```
00000000: 51 49 d5 41 33 91 45 dd ff 04 f5 05 e5 21 39 f2
00000010: 3a 71 1c 18 ef 39 94 1e dd 0c 70 e5 14 12 43 0a
```

(40) Computes K2r (i2 = 0)

```
00000000: 0e 8f 21 54 2e fc 81 79 57 c4 c9 0b e0 25 9a 59
00000010: 29 26 0e 86 20 bf d4 e6 00 32 23 43 ae f0 11 52
```

(41) Computes K3r (i3 = 0)

```
00000000: 92 b8 b2 d6 7a 2d e1 db 5f e1 39 d2 57 c8 24 5f  
00000010: f6 22 54 de fc 35 35 c9 24 cf a5 4a e1 5d 75 71
```

(42) Composes MGM nonce

```
00000000: 00 00 00 00 d2 f6 27 21
```

(43) Extracts ICV from message

```
00000000: 57 b4 30 41 07 50 b1 cc
```

(44) Extracts AAD from message

```
00000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
00000010: 2e 20 24 20 00 00 00 00 00 00 bd 21 00 00 a1
```

(45) Extracts ciphertext from message

```
00000000: 2e c7 13 73 4c cc f8 f3 51 71 ac d9 7a 6e 20 2c  
00000010: 68 70 bb 8f 82 42 2a 14 e3 8d b8 25 10 9a 1f b6  
00000020: 51 ef c5 35 50 bf df 8e 96 bc 94 5a e5 4d 9d 99  
00000030: 9a 14 36 d1 4b 61 e1 de 3b 0d 12 94 e5 72 60 00  
00000040: 0f 9d dd 2b e1 97 25 4c 5c ee 48 2e 9b f7 d8 9e  
00000050: 01 6b 1d 92 b7 c1 7f 16 81 0f e2 e3 14 1c 27 c7  
00000060: 35 e9 e3 fd b8 fc 5d fb a2 ee 2f f9 b0 17 39 ca  
00000070: f1 2e b1 13 99 e0 da 10 1a 29 74 26 a3 63 ce 09  
00000080: 6a f9 1b 67 4a f2 fb 0f 17 5e 48 1a 93
```

(46) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext

```

00000000: 28 00 00 20 00 00 00 1c 01 03 04 02 15 4f 35 39
00000010: 03 00 00 08 01 00 00 21 00 00 00 08 05 00 00 00
00000020: 2c 00 00 24 41 5e a7 ed 7e 65 d3 ff d3 df ed 5f
00000030: b5 c8 5c 60 2b 9c 15 14 eb 52 97 b7 fc aa 33 c4
00000040: 64 f3 58 06 2d 00 00 18 01 00 00 00 07 00 00 10
00000050: 00 00 ff ff 0a 01 01 03 0a 01 01 03 29 00 00 18
00000060: 01 00 00 00 07 00 00 10 00 00 ff ff 0a 00 00 00
00000070: 0a 00 00 ff 29 00 00 08 00 00 40 02 29 00 00 08
00000080: 00 00 40 0a 00 00 00 08 00 00 40 0b 00

```

(47) Parses received message

```

Create Child SA
#FDD9358950D5DB22.81275DA298901A06.00000000 IKEv2 R=>I[189]
E[161]{
    SA[32]{
        P[28](#1:ESP:154F3539:2#){
            Encryption=ENCR_MAGMA_MGM_KTREE,
            ESN=Off},
        NONCE[36]{415EA7...F35806},
        TSi[24](1#){10.1.1.3},
        TSr[24](1#){10.0.0.0-10.0.0.255},
        N[8](ADDITIONAL_TS_POSSIBLE),
        N[8](ESP_TFC_PADDING_NOT_SUPPORTED),
        N[8](NON_FIRST_FRAGMENTS_ALSO)}

```

(48) Computes keys for new ESP SAs

```

00000000: 6a b6 a0 e7 05 d3 51 16 6f 4f b9 d6 59 0c c8 69
00000010: 43 70 cf 6f 0d 32 c3 7d 92 75 00 4b 0a 76 35 67
00000020: 64 0e 3a fe
00000000: 65 56 1c 79 27 cb c6 d6 8c b8 69 0f 40 00 d2 0a
00000010: c1 49 1c d1 86 88 db 88 ae f3 be 82 0c 71 b7 c9
00000020: 6c cf a3 64

```

Sub-scenario 4: IKE SA deletion using the INFORMATIONAL exchange.



Initiator's actions:

- (1)** Creates message

```

Informational
#FDD9358950D5DB22.81275DA298901A06.00000003 IKEv2 R<-I[57]
E[29]{ 
D[8](IKE)}

```

- (2)** Uses previously computed key K3i

```

00000000: 45 6f 03 f7 ad 75 eb e9 52 b8 8f 0d e8 36 47 69
00000010: 4d 2e f2 ba 15 e6 8c 89 1c 99 62 64 fb 0e 70 0a

```

- (3)** Composes MGM nonce

```

00000000: 00 00 00 03 2b 3d 3b 2f

```

- (4)** Composes AAD

```

00000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06
00000010: 2e 20 25 08 00 00 00 03 00 00 00 39 2a 00 00 1d

```

- (5)** Composes plaintext

000000000: 00 00 00 08 01 00 00 00 00

- (6) Encrypts plaintext using K_{3i} as K_{msg}, resulted in ciphertext

000000000: 4f ff 67 66 41 9c d3 ec 8e

- (7) Computes ICV using K_{3i} as K_{msg}

000000000: d2 bf 0e b7 8f c5 53 03

- (8) Composes IV

000000000: 00 00 00 00 00 00 00 00 03

- (9) Sends message, peer receives message

10.111.10.171:54295->10.111.15.45:4500 [61]

000000000: 00 00 00 00 fd d9 35 89 50 d5 db 22 81 27 5d a2
00000010: 98 90 1a 06 2e 20 25 08 00 00 00 03 00 00 00 39
00000020: 2a 00 00 1d 00 00 00 00 00 00 00 03 4f ff 67 66
00000030: 41 9c d3 ec 8e d2 bf 0e b7 8f c5 53 03

Responder's actions:

- (10) Extracts IV from message

000000000: 00 00 00 00 00 00 00 00 03

(11) Uses previously computed key K3i

```
000000000: 45 6f 03 f7 ad 75 eb e9 52 b8 8f 0d e8 36 47 69  
000000010: 4d 2e f2 ba 15 e6 8c 89 1c 99 62 64 fb 0e 70 0a
```

(12) Composes MGM nonce

```
000000000: 00 00 00 03 2b 3d 3b 2f
```

(13) Extracts ICV from message

```
000000000: d2 bf 0e b7 8f c5 53 03
```

(14) Extracts AAD from message

```
000000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
000000010: 2e 20 25 08 00 00 00 03 00 00 00 39 2a 00 00 1d
```

(15) Extracts ciphertext from message

```
000000000: 4f ff 67 66 41 9c d3 ec 8e
```

(16) Decrypts ciphertext and verifies ICV using K3i as K_msg,
resulted in plaintext

```
000000000: 00 00 00 08 01 00 00 00 00
```

(17) Parses received message

```
Informational  
#FDD9358950D5DB22.81275DA298901A06.00000003 IKEv2 I->R[57]  
E[29]{  
    D[8](IKE)}
```

(18) Creates message

```
Informational  
#FDD9358950D5DB22.81275DA298901A06.00000003 IKEv2 I=<R[49]  
E[21]{}
```

(19) Uses previously computed key K3r

```
00000000: 92 b8 b2 d6 7a 2d e1 db 5f e1 39 d2 57 c8 24 5f  
00000010: f6 22 54 de fc 35 35 c9 24 cf a5 4a e1 5d 75 71
```

(20) Composes MGM nonce

```
00000000: 00 00 00 03 d2 f6 27 21
```

(21) Composes AAD

```
00000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
00000010: 2e 20 25 20 00 00 00 03 00 00 00 31 00 00 00 15
```

(22) Composes plaintext

000000000: 00

(23) Encrypts plaintext using K3r as K_msg, resulted in ciphertext

000000000: a8

(24) Computes ICV using K3r as K_msg

000000000: ef 77 21 c9 8b c1 eb 98

(25) Composes IV

000000000: 00 00 00 00 00 00 00 00 03

(26) Sends message, peer receives message

10.111.10.171:54295<-10.111.15.45:4500 [53]

000000000: 00 00 00 00 fd d9 35 89 50 d5 db 22 81 27 5d a2
00000010: 98 90 1a 06 2e 20 25 20 00 00 00 03 00 00 00 31
00000020: 00 00 00 15 00 00 00 00 00 00 00 03 a8 ef 77 21
00000030: c9 8b c1 eb 98

Initiator's actions:

(27) Extracts IV from message

000000000: 00 00 00 00 00 00 00 00 03

(28) Uses previously computed key K3r

```
000000000: 92 b8 b2 d6 7a 2d e1 db 5f e1 39 d2 57 c8 24 5f  
000000010: f6 22 54 de fc 35 35 c9 24 cf a5 4a e1 5d 75 71
```

(29) Composes MGM nonce

```
000000000: 00 00 00 03 d2 f6 27 21
```

(30) Extracts ICV from message

```
000000000: ef 77 21 c9 8b c1 eb 98
```

(31) Extracts AAD from message

```
000000000: fd d9 35 89 50 d5 db 22 81 27 5d a2 98 90 1a 06  
000000010: 2e 20 25 20 00 00 00 03 00 00 00 31 00 00 00 15
```

(32) Extracts ciphertext from message

```
000000000: a8
```

(33) Decrypts ciphertext and verifies ICV using K3r as K_msg,
resulted in plaintext

```
000000000: 00
```

(34) Parses received message

Informational
#FDD9358950D5DB22.81275DA298901A06.00000003 IKEv2 R=>I[49]
E[21]{}

Author's Address

Valery Smyslov
ELVIS-PLUS
PO Box 81
Moscow (Zelenograd)
124460
Russian Federation

Phone: [+7 495 276 0211](#)
Email: svan@elvis.ru