


OAuth 2.0 PoP: AS-Client Key Distribution

J. Bradley, P. Hunt, M. Jones, H.
Tschofenig, M. Mihaly


draft-ietf-oauth-resource-indicators-01




'req_cnf' contains the public key the client would like to associate with the access token

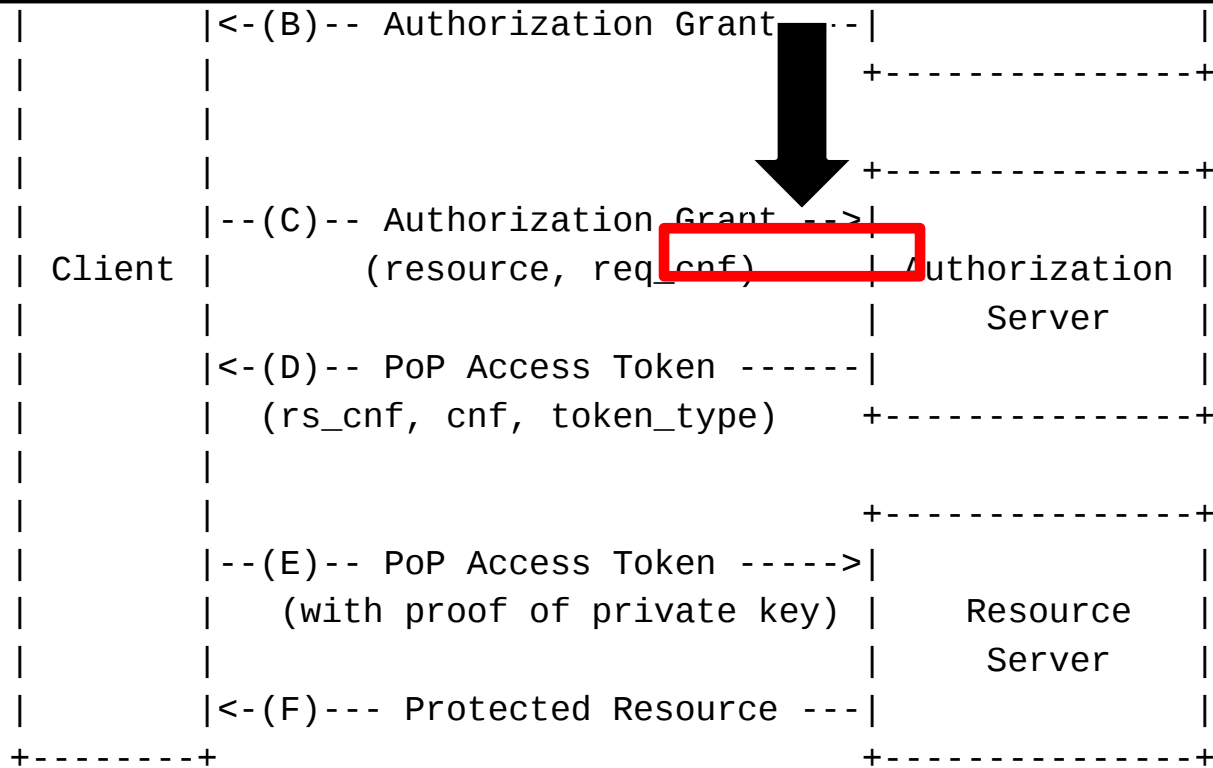

'cnf' contains (encrypted) symmetric proof-of-possession key

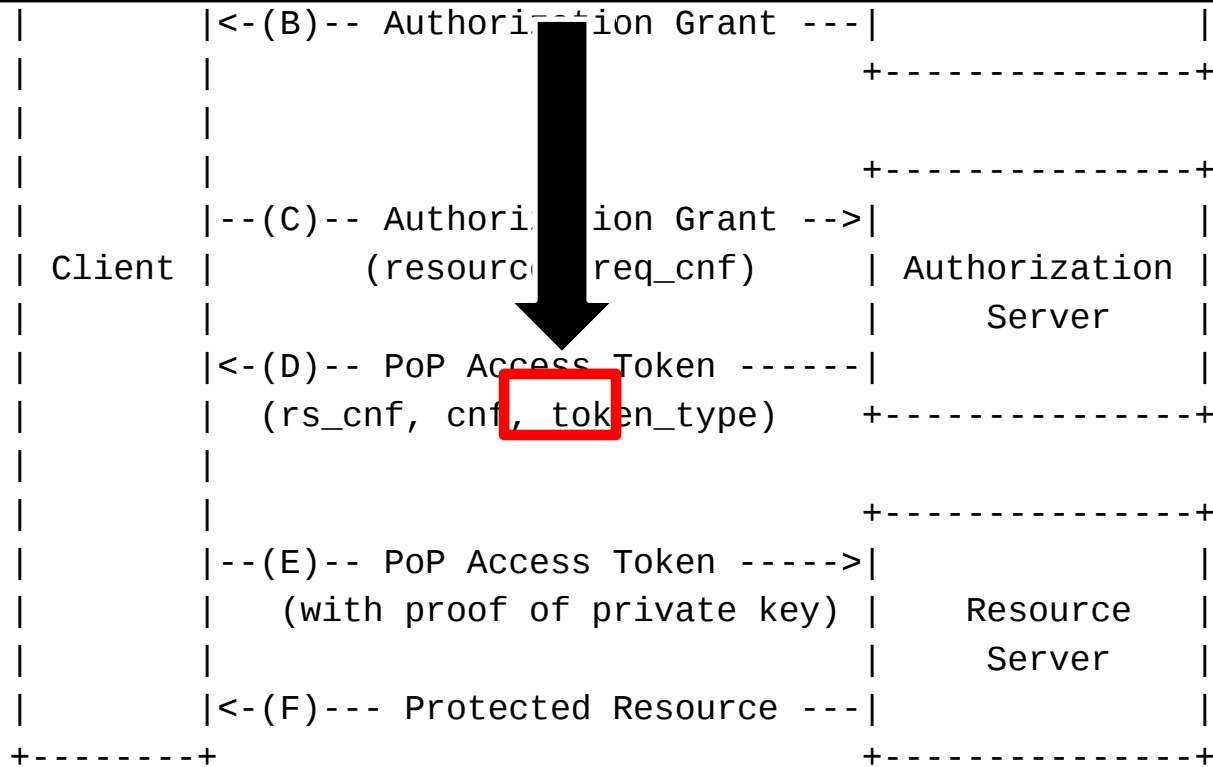

'token_type' indicates PoP access token

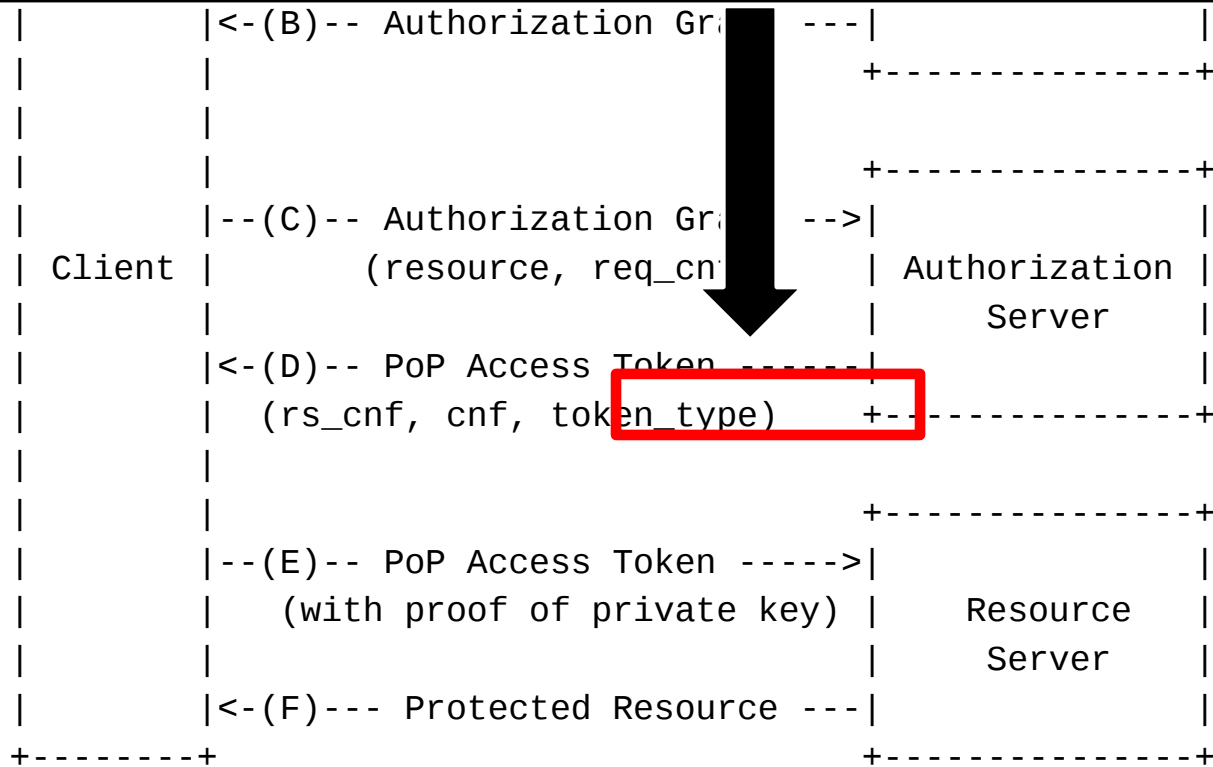

Next steps

- Usual bug fixes and wording improvements
- Needs to be reviewed by the WebRTC guys.
- More examples could help readers.
- Ensure proper alignment with ACE \Rightarrow more discussions later this week.