

Path Segment Encapsulation in SRv6

draft-li-6man-srv6-path-segment-encap-00


Presenter: Cheng Li

Cheng Li/Weiqiang Cheng/Dhruv Dhoby/Zhenbin Li

IETF#105


Path Segment Encapsulation in SRv6

- draft-ietf-spring-mpls-path-segment introduces a new Path Segment to unique identify an SR-MPLS.
- In SRv6, the segment list may not be a good key to identify an SRv6 path as the length of segment list is too long and flexible.
- In reduced mode, the first Segment is not inserted in the SRH, so the path info is incomplete, and a path ID is needed to identify the path.
- An SRv6 Path Segment that can identify an SRv6 path, Candidate-paths or SRv6 Policy is proposed in **draft-li-spring-srv6-path-segment-02**.
- To indicate the existence of Path Segment in the SRH, a P-bit is defined.
 - P-bit: set when SRv6 Path Segment is inserted. It SHOULD be ignored when a node does not support SRv6 Path Segment processing.
- The SRv6 Path Segment MUST appear only once in a SID list, and it MUST appear at the last entry.

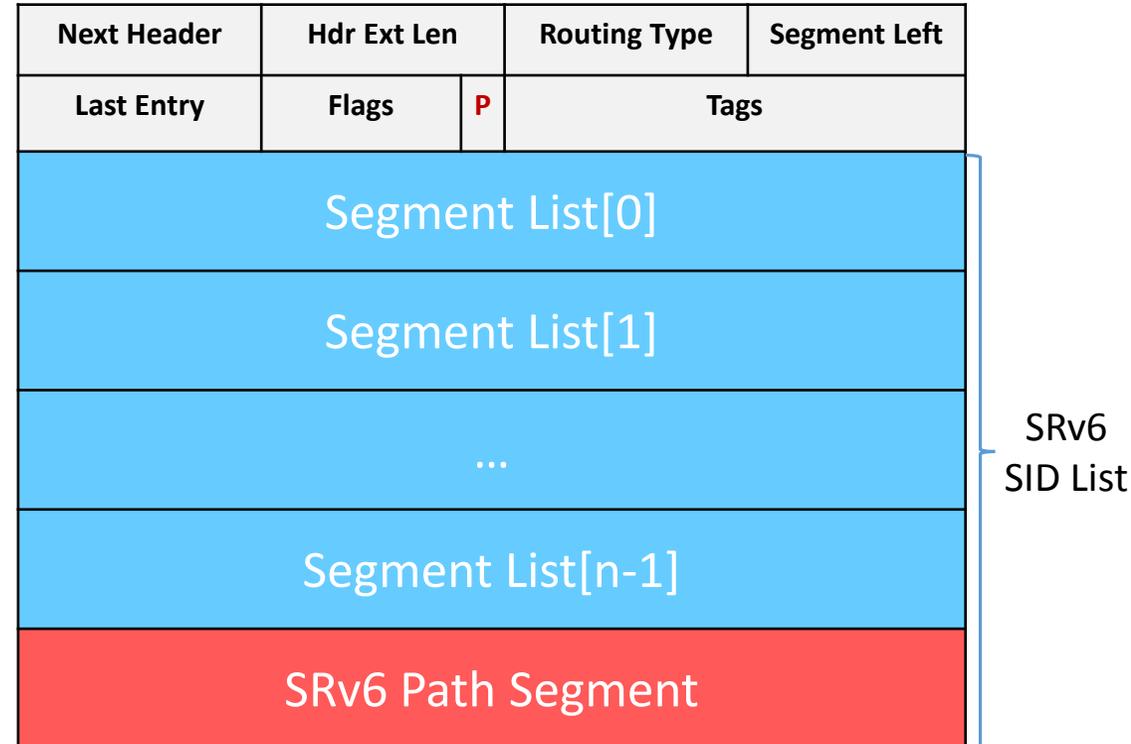

Format of SRv6 Path Segment

- This document defines two formats of SRv6 Path Segment.
 - SRv6 Path Segment: Locator and Local ID
 - where the LOC part identifies the egress node that allocates the Path Segment,
 - the FUNCT part is an unique local ID to identify an SRv6 Path towards to the egress on the egress

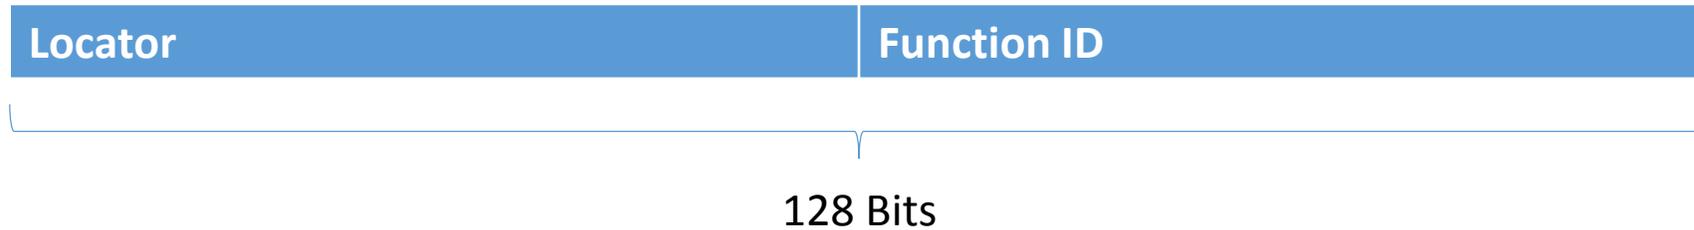

- SRv6 Path Segment: Global ID
 - the SRv6 Path Segment will not be copied to the IPv6 Destination Address, so the SRv6 Path Segment ID can be allocated from an independent 128-bits ID Space.
 - In this case, a new table should be maintained at the node for SRv6 Path Segment.



Processing of SRv6 Path Segment

- An SRv6 Path Segment can be allocated through several ways, such as
 - PCEP [[I-D.li-pce-sr-path-segment](#)]
 - BGP [[I-D.li-idr-sr-policy-path-segment-distribution](#)]
- When the SRv6 Path Segment is allocated by the egress, it MUST be distributed to the ingress node.
- An SRv6 Path Segment may be distributed to the SRv6 nodes along the path depending on use cases.
- When the SRv6 Path Segment is used, the following rules apply:
 - The SRv6 Path Segment MUST appear only once in a SID list, and it MUST appear at the last entry.
 - Only the one that appears at the last entry in the SID list will be processed. SRv6 Path Segment appears at other location in the SID list will be treated as an error.
 - When an SRv6 Path Segment is inserted, the SL MUST be initiated to be less than the value of Last Entry, and will not point to SRv6 Path Segment.
 - The SRv6 Path Segment MUST NOT be copied to the IPv6 destination address.
 - Penultimate Segment Popping (PSP) MUST be disabled.
 - The ingress needs to set the P-bit when an SRv6 Path Segment is inserted in the SID List.
 - The specific SRv6 Path Segment processing depends on use cases, and it is out of scope of this document.

Next Step

- Comments are welcome!
- Discuss the format of SRv6 Path Segment.

Thank you
=====