

ASDF
Internet-Draft
Intended status: Standards Track
Expires: 12 September 2021

M. Koster, Ed.
Dogtiger Labs
C. Bormann, Ed.
Universität Bremen TZI
11 March 2021

Semantic Definition Format (SDF) for Data and Interactions of Things
draft-ietf-asdf-sdf-05

Abstract

The Semantic Definition Format (SDF) is a format for domain experts to use in the creation and maintenance of data and interaction models in the Internet of Things. It was created as a common language for use in the development of the One Data Model liaison organization (OneDM) definitions. Tools convert this format to database formats and other serializations as needed.

An SDF specification describes definitions of SDF Objects and their associated interactions (Events, Actions, Properties), as well as the Data types for the information exchanged in those interactions.

A JSON format representation of SDF 1.0 was defined in a previous (-00) version of this document. The present document has been designated as an implementation draft, labeled SDF 1.1, at the IETF110 meeting of the ASDF WG (2021-03-11).

Contributing

Recent versions of this document are available at its GitHub repository <https://github.com/ietf-wg-asdf/SDF> (<https://github.com/ietf-wg-asdf/SDF>) -- this also provides an issue tracker as well as a way to supply "pull requests".

General discussion of this SDF Internet-Draft happens on the mailing list of the IETF ASDF Working Group, asdf@ietf.org (subscribe at <https://www.ietf.org/mailman/listinfo/asdf> (<https://www.ietf.org/mailman/listinfo/asdf>)).

The IETF Note Well applies (<https://www.ietf.org/about/note-well/> (<https://www.ietf.org/about/note-well/>)).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 12 September 2021.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	Terminology and Conventions	4
2.	Overview	6
2.1.	Example Definition	6
2.2.	Elements of an SDF model	7
2.2.1.	sdfObject	8
2.2.2.	sdfProperty	8
2.2.3.	sdfAction	9
2.2.4.	sdfEvent	10
2.2.5.	sdfData	10
2.2.6.	sdfThing	11
2.2.7.	sdfProduct	11
3.	SDF structure	11
3.1.	Information block	11
3.2.	Namespaces section	12
3.3.	Definitions section	13
4.	Names and namespaces	14
4.1.	Structure	14
4.2.	Contributing global names	15
4.3.	Referencing global names	15

4.4.	sdfRef	16
4.5.	sdfRequired	17
4.5.1.	Optionality using the keyword "sdfRequired"	17
4.6.	Common Qualities	18
4.7.	Data Qualities	19
4.7.1.	sdfType	23
4.7.2.	sdfChoice	24
5.	Keywords for definition groups	26
5.1.	sdfObject	26
5.2.	sdfProperty	26
5.3.	sdfAction	27
5.4.	sdfEvent	27
5.5.	sdfData	28
6.	High Level Composition	28
6.1.	Paths in the model namespaces	29
6.2.	Modular Composition	29
6.2.1.	Use of the "sdfRef" keyword to re-use a definition	29
6.3.	sdfThing	30
6.4.	sdfProduct	31
7.	IANA Considerations	31
7.1.	Media Type	31
7.2.	Registries	32
8.	Security Considerations	32
9.	References	32
9.1.	Normative References	32
9.2.	Informative References	34
Appendix A.	Formal Syntax of SDF	34
Appendix B.	json-schema.org Rendition of SDF Syntax	38
Acknowledgements		77
Contributors		77
Authors' Addresses		77

1. Introduction

The Semantic Definition Format (SDF) is a format for domain experts to use in the creation and maintenance of data and interaction models in the Internet of Things. It was created as a common language for use in the development of the One Data Model liaison organization (OneDM) definitions. Tools convert this format to database formats and other serializations as needed.

An SDF specification describes definitions of SDF Objects and their associated interactions (Events, Actions, Properties), as well as the Data types for the information exchanged in those interactions.

A JSON format representation of SDF 1.0 was defined in a previous (-00) version of this document. The present document has been designated as an `_implementation draft_`, labeled SDF 1.1, at the IETF110 meeting of the ASDF WG (2021-03-11).

1.1. Terminology and Conventions

Thing: A physical device that is also made available in the Internet of Things. The term is used here for Things that are notable for their interaction with the physical world beyond interaction with humans; a temperature sensor or a light might be a Thing, but a router that employs both temperature sensors and indicator lights might exhibit less Thingness, as the effects of its functioning are mostly on the digital side.

Affordance: An element of an interface offered for interaction, defining its possible uses or making clear how it can or should be used. The term is used here for the digital interfaces of a Thing only; it might also have physical affordances such as buttons, dials, and displays.

Quality: A metadata item in a definition or declaration which says something about that definition or declaration. A quality is represented in SDF as an entry in a JSON map (object) that serves as a definition or declaration.

Entry: A key-value pair in a map. (In JSON maps, sometimes also called "member".)

Block: One or more entries in a JSON map that is part of an SDF specification; these entries together serve a specific function.

Group: An entry in the main SDF map and in certain nested definitions that has a Class Name Keyword as its key and a map of definition entries (Definition Group) as a value.

Class Name Keyword: One of `sdfThing`, `sdfProduct`, `sdfObject`, `sdfProperty`, `sdfAction`, `sdfEvent`, or `sdfData`; the Classes for these type keywords are capitalized and prefixed with "sdf".

Class: Abstract term for the information that is contained in groups identified by a Class Name Keyword.

Property: An affordance that can potentially be used to read, write,

and/or observe state on an Object. (Note that Entries are often called properties in other environments; in this document, the term Property is specifically reserved for affordances, even if the map key "properties" might be imported from a data definition language with the other semantics.)

Action: An affordance that can potentially be used to perform a named operation on an Object.

Event: An affordance that can potentially be used to obtain information about what happened to an Object.

Object: A grouping of Property, Action, and Event definitions; the main "atom" of reusable semantics for model construction. (Note that JSON maps are often called JSON objects due to JSON's JavaScript heritage; in this document, the term Object is specifically reserved for the above grouping, even if the type name "object" might be imported from a data definition language with the other semantics.)

Element: A part or an aspect of something abstract; used here in its usual English definition. (Occasionally, also used specifically for the elements of JSON arrays.)

Definition: An entry in a Definition Group; the entry creates a new semantic term for use in SDF models and associates it with a set of qualities.

Declaration: A reference to and a use of a definition within an enclosing definition, intended to create component instances within that enclosing definition. Every declaration can also be used as a definition for reference in a different place.

Protocol Binding: A companion document to an SDF specification that defines how to map the abstract concepts in the specification into the protocols in use in a specific ecosystem. Might supply URL components, numeric IDs, and similar details.

Conventions:

* The singular form is chosen as the preferred one for the keywords defined here.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

2. Overview

2.1. Example Definition

We start with an example for the SDF definition of a simple Object called "Switch" (Figure 1).

```
{
  "info": {
    "title": "Example file for OneDM Semantic Definition Format",
    "version": "2019-04-24",
    "copyright": "Copyright 2019 Example Corp. All rights reserved.",
    "license": "https://example.com/license"
  },
  "namespace": {
    "cap": "https://example.com/capability/cap"
  },
  "defaultNamespace": "cap",
  "sdfObject": {
    "Switch": {
      "sdfProperty": {
        "value": {
          "description": "The state of the switch; false for off and
true for on."
          "type": "boolean"
        }
      },
      "sdfAction": {
        "on": {
          "description": "Turn the switch on; equivalent to setting
value to true."
        },
        "off": {
          "description": "Turn the switch off; equivalent to setting
value to false."
        },
        "toggle": {
          "description": "Toggle the switch; equivalent to setting v
alue to its complement."
        }
      }
    }
  }
}
```

Figure 1: A simple example of an SDF definition file

This is a model of a switch. The state "value" declared in the "sdfProperty" group, represented by a Boolean, will be true for "on" and will be false for "off". The actions "on" or "off" declared in the "sdfAction" group are redundant with setting the "value" and are in the example to illustrate that there are often different ways of

achieving the same effect. The action "toggle" will invert the value of the sdfProperty value, so that 2-way switches can be created; having such action will avoid the need for first retrieving the current value and then applying/setting the inverted value.

The "sdfObject" group lists the affordances of instances of this object. The "sdfProperty" group lists the property affordances described by the model; these represent various perspectives on the state of the object. Properties can have additional qualities to describe the state more precisely. Properties can be annotated to be read, write or read/write; how this is actually done by the underlying transfer protocols is not described in the SDF model but left to companion protocol bindings. Properties are often used with RESTful paradigms [I-D.irtf-t2trg-rest-iot], describing state. The "sdfAction" group is the mechanism to describe other interactions in terms of their names, input, and output data (no data are used in the example), as in a POST method in REST or in a remote procedure call. The example "toggle" is an Action that changes the state based on the current state of the Property named "value". (The third type of affordance is Events, which are not described in this example.)

2.2. Elements of an SDF model

The SDF language uses seven predefined Class Name Keywords for modeling connected Things, six of which are illustrated in Figure 2 (the seventh class "sdfProduct" is exactly like "sdfThing").

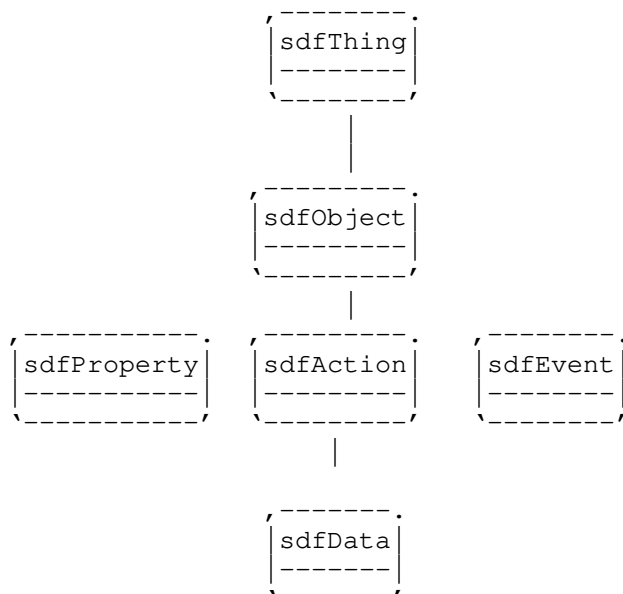


Figure 2: Main classes used in SDF models

The seven main Class Name Keywords are discussed below.

2.2.1. sdfObject

Objects, the items listed in an "sdfObject" group, are the main "atom" of reusable semantics for model construction. It aligns in scope with common definition items from many IoT modeling systems, for example ZigBee Clusters [ZCL], OMA SpecWorks LwM2M Objects [OMA], and OCF Resource Types [OCF].

An "sdfObject" contains a set of "sdfProperty", "sdfAction", and "sdfEvent" definitions that describe the interaction affordances associated with some scope of functionality.

For the granularity of definition, "sdfObject" definitions are meant to be kept narrow enough in scope to enable broad reuse and interoperability. For example, defining a light bulb using separate "sdfObject" definitions for on/off control, dimming, and color control affordances will enable interoperable functionality to be configured for diverse product types. An "sdfObject" definition for a common on/off control may be used to control may different kinds of Things that require on/off control.

2.2.2. sdfProperty

"sdfProperty" is used to model elements of state within "sdfObject" instances.

An instance of "sdfProperty" may be associated with some protocol affordance to enable the application to obtain the state variable and, optionally, modify the state variable. Additionally, some protocols provide for in-time reporting of state changes. (These three aspects are described by the qualities "readable", "writable", and "observable" defined for an "sdfProperty".)

Definitions in "sdfProperty" groups look like definitions in "sdfData" groups, however, they actually also declare a Property with the given qualities to be potentially present in the containing Object. (Qualities beyond those of "sdfData" definitions could be defined for "sdfProperty" declarations but currently aren't; this means that even Property qualities such as "readable" and "writable" can be associated with definitions in "sdfData" groups, as well.)

For definitions in "sdfProperty" and "sdfData", SDF provides qualities that can constrain the structure and values of data allowed in an instance of these data, as well as qualities that associate semantics to these data, for engineering units and unit scaling information.

For the data definition within "sdfProperty" or "sdfData", SDF borrows a number of elements proposed for the drafts 4 and 7 of the json-schema.org "JSON Schema" format [I-D.handrews-json-schema-validation], enhanced by qualities that are specific to SDF. For the current version of SDF, data are constrained to be of simple types (number, string, Boolean), JSON maps composed of named data ("objects"), and arrays of these types. Syntax extension points are provided that can be used to provide richer types in future versions of this specification (possibly more of which can be borrowed from json-schema.org).

Note that "sdfProperty" definitions (and "sdfData" definitions in general) are not intended to constrain the formats of data used for communication over network interfaces. Where needed, data definitions for payloads of protocol messages are expected to be part of the protocol binding.

2.2.3. sdfAction

The "sdfAction" group contains declarations of Actions, model affordances that, when triggered, have more effect than just reading, updating, or observing Thing state, often resulting in some outward physical effect (which, itself, cannot be modeled in SDF). From a programmer's perspective, they might be considered to be roughly analogous to method calls.

Actions may have data parameters; these are modeled as a single item of input data and output data, each. (Where multiple parameters need to be modeled, an "object" type can be used to combine these parameters into one.) Actions may be long-running, that is to say that the effects may not take place immediately as would be expected for an update to an "sdfProperty"; the effects may play out over time and emit action results. Actions may also not always complete and may result in application errors, such as an item blocking the closing of an automatic door.

Actions may have (or lack) qualities of idempotency and side-effect safety.

The current version of SDF only provides data constraint modeling and semantics for the input and output data of definitions in "sdfAction" groups. Again, data definitions for payloads of protocol messages, and detailed protocol settings for invoking the action, are expected to be part of the protocol binding.

2.2.4. sdfEvent

The "sdfEvent" group contains declarations of Events, which can model affordances that inform about "happenings" associated with an instance of an Object; these may result in a signal being stored or emitted as a result.

Note that there is a trivial overlap with sdfProperty state changes, which may also be defined as events but are not generally required to be defined as such. However, Events may exhibit certain ordering, consistency, and reliability requirements that are expected to be supported in various implementations of "sdfEvent" that do distinguish sdfEvent from sdfProperty. For instance, while a state change may simply be superseded by another state change, some events are "precious" and need to be preserved even if further events follow.

The current version of SDF only provides data constraint modeling and semantics for the output data of Event affordances. Again, data definitions for payloads of protocol messages, and detailed protocol settings for invoking the action, are expected to be part of the protocol binding.

2.2.5. sdfData

Definitions in "sdfData" groups are provided separately from those in "sdfProperty" groups to enable common modeling patterns, data constraints, and semantic anchor concepts to be factored out for data items that make up "sdfProperty" items and serve as input and output data for "sdfAction" and "sdfEvent" items.

It is a common use case for such a data definition to be shared between an "sdfProperty" item and input or output parameters of an "sdfAction" or output data provided by an "sdfEvent". "sdfData" definitions also enable factoring out extended application data types such as mode and machine state enumerations to be reused across multiple definitions that have similar basic characteristics and requirements.

2.2.6. sdfThing

Back at the top level, the "sdfThing" groups enables definition of models for complex devices that will use one or more "sdfObject" definitions.

A definition in an "sdfThing" group can refine the metadata of the definitions it is composed from: other definitions in "sdfThing" groups definitions in "sdfObject" groups.

2.2.7. sdfProduct

"sdfThing" has a derived class "sdfProduct", which can be used to indicate a top level inventory item with a Stock-Keeping Unit (SKU) identifier and other particular metadata. Structurally, there is no difference between definitions in either group; semantically, a definition in an "sdfProduct" group is intended to describe a class of complete Things.

3. SDF structure

SDF definitions are contained in SDF files. One or more SDF files can work together to provide the definitions and declarations that are the payload of the SDF format.

A SDF definition file contains a single JSON map (JSON object). This object has three sections: the information block, the namespaces section, and the definitions section.

3.1. Information block

The information block contains generic meta data for the file itself and all included definitions. To enable tool integration, the information block is optional in the grammar of SDF; most processes for working with SDF files will have policies that only SDF models with an info block can be processed. It is therefore RECOMMENDED that SDF validator tools emit a warning when no information block is found.

The keyword (map key) that defines an information block is "info". Its value is a JSON map in turn, with a set of entries that represent qualities that apply to the included definition.

Qualities of the information block are shown in Table 1.

Quality	Type	Required	Description
title	string	yes	A short summary to be displayed in search results, etc.
version	string	yes	The incremental version of the definition, format TBD
copyright	string	yes	Link to text or embedded text containing a copyright notice
license	string	yes	Link to text or embedded text containing license terms

Table 1: Qualities of the Information Block

While the format of the version string is marked as TBD, it is intended to be lexicographically increasing over the life of a model: a newer model always has a version string that string-compares higher than all previous versions. This is easily achieved by following the convention to start the version with an [RFC3339] "date-time" or, if new versions are generated less frequently than once a day, just the "full-date" (i.e., YYYY-MM-DD); in many cases, that will be all that is needed (see Figure 1 for an example).

The license string is preferably either a URI that points to a web page with an unambiguous definition of the license, or an [SPDX] license identifier. (For models to be handled by the One Data Model liaison group, this will typically be "BSD-3-Clause".)

3.2. Namespaces section

The namespaces section contains the namespace map and the defaultNamespace setting.

The namespace map is a map from short names for URIs to the namespace URIs themselves.

The defaultNamespace setting selects one of the entries in the namespace map by giving its short name. The associated URI (value of this entry) becomes the default namespace for the SDF definition file.

Quality	Type	Required	Description
namespace	map	no	Defines short names mapped to namespace URIs, to be used as identifier prefixes
defaultNamespace	string	no	Identifies one of the prefixes in the namespace map to be used as a default in resolving identifiers

Table 2: Namespaces Section

The following example declares a set of namespaces and defines "cap" as the default namespace. By convention, the values in the namespace map contain full URIs without a fragment identifier, and the fragment identifier is then added, if needed, where the namespace entry is used.

```
"namespace": {
  "cap": "https://example.com/capability/cap",
  "zcl": "https://zcl.example.com/sdf"
},
"defaultNamespace": "cap",
```

If no defaultNamespace setting is given, the SDF definition file does not contribute to a global namespace. As the defaultNamespace is set by giving a namespace short name, its presence requires a namespace map that contains a mapping for that namespace short name.

If no namespace map is given, no short names for namespace URIs are set up, and no defaultNamespace can be given.

3.3. Definitions section

The Definitions section contains one or more groups, each identified by a Class Name Keyword (there can only be one group per keyword; the actual grouping is just a shortcut and does not carry any specific semantics). The value of each group is a JSON map (object), the keys of which serve for naming the individual definitions in this group, and the corresponding values provide a set of qualities (name-value pairs) for the individual definition. (In short, we speak of the map entries as "named sets of qualities".)

Each group may contain zero or more definitions. Each identifier defined creates a new type and term in the target namespace. Declarations have a scope of the current definition block.

A definition may in turn contain other definitions. Each definition is a named set of qualities, i.e., it consists of the newly defined identifier and a set of key-value pairs that represent the defined qualities and contained definitions.

An example for an Object definition is given in Figure 3:

```
"sdfObject": {
  "foo": {
    "sdfProperty": {
      "bar": {
        "type": "boolean"
      }
    }
  }
}
```

Figure 3: Example Object definition

This example defines an Object "foo" that is defined in the default namespace (full address: "#/sdfObject/foo"), containing a property that can be addressed as "#/sdfObject/foo/sdfProperty/bar", with data of type boolean.

Some of the definitions are also declarations: the definition of the entry "bar" in the property "foo" means that each instance of a "foo" can have zero or one instance of a "bar". Entries within "sdfProperty", "sdfAction", and "sdfEvent", within "sdfObject" entries, are declarations. Similarly, entries within an "sdfThing" describe instances of "sdfObject" (or nested "sdfThing") that form part of instances of the Thing.

4. Names and namespaces

SDF definition files may contribute to a global namespace, and may reference elements from that global namespace. (An SDF definition file that does not set a defaultNamespace does not contribute to a global namespace.)

4.1. Structure

Global names look exactly like "https://" URIs with attached fragment identifiers.

There is no intention to require that these URIs can be dereferenced. (However, as future versions of SDF might find a use for dereferencing global names, the URI should be chosen in such a way that this may become possible in the future.)

The absolute URI of a global name should be a URI as per Section 3 of [RFC3986], with a scheme of "https" and a path ("hier-part" in [RFC3986]). For the present version of this specification, the query part should not be used (it might be used in later versions).

The fragment identifier is constructed as per Section 6 of [RFC6901].

4.2. Contributing global names

The fragment identifier part of a global name defined in an SDF definition file is constructed from a JSON pointer that selects the element defined for this name in the SDF definition file.

The absolute URI part is a copy of the default namespace, i.e., the default namespace is always the target namespace for a name for which a definition is contributed. When emphasizing that name definitions are contributed to the default namespace, we therefore also call it the "target namespace" of the SDF definition file.

E.g., in Figure 1, definitions for the following global names are contributed:

- * https://example.com/capability/cap#/sdfObject/Switch
- * https://example.com/capability/cap#/sdfObject/Switch/sdfProperty/value
- * https://example.com/capability/cap#/sdfObject/Switch/sdfAction/on
- * https://example.com/capability/cap#/sdfObject/Switch/sdfAction/off

Note the "#", which separates the absolute-URI part (Section 4.3 of [RFC3986]) from the fragment identifier part.

4.3. Referencing global names

A name reference takes the form of the production "curie" in [W3C.NOTE-curie-20101216] (note that this excludes the production "safe-curie"), but also limiting the IRIs involved in that production to URIs as per [RFC3986] and the prefixes to ASCII characters [RFC0020].

A name that is contributed by the current SDF definition file can be referenced by a Same-Document Reference as per section 4.4 of [RFC3986]. As there is little point in referencing the entire SDF definition file, this will be a "#" followed by a JSON pointer. This is the only kind of name reference to itself that is possible in an SDF definition file that does not set a default namespace.

Name references that point outside the current SDF definition file need to contain curie prefixes. These then reference namespace declarations in the namespaces section.

For example, if a namespace prefix is defined:

```
"namespace": {  
  "foo": "https://example.com/"  
}
```

Then this reference to that namespace:

```
{ "sdfRef": "foo:#/sdfData/temperatureData" }
```

references the global name:

```
"https://example.com/#!/sdfData/temperatureData"
```

Note that there is no way to provide a URI scheme name in a curie, so all references outside of the document need to go through the namespace map.

Name references occur only in specific elements of the syntax of SDF:

- * copying elements via sdfRef values
- * pointing to elements via sdfRequired value elements

4.4. sdfRef

In a JSON map establishing a definition, the keyword "sdfRef" is used to copy all of the qualities of the referenced definition, indicated by the included name reference, into the newly formed definition. (This can be compared to the processing of the "\$ref" keyword in [I-D.handrews-json-schema-validation].)

For example, this reference:

```
"temperatureProperty": {  
  "sdfRef": "#/sdfData/temperatureData"  
}
```


creates a new definition "temperatureProperty" that contains all of the qualities defined in the definition at /sdfData/temperatureData.

4.5. sdfRequired

The value of "sdfRequired" is an array of name references, each pointing to one declaration the instantiation of which is declared mandatory.

4.5.1. Optionality using the keyword "sdfRequired"

The keyword "sdfRequired" is provided to apply a constraint that defines for which declarations corresponding data are mandatory in an instance conforming the current definition.

The value of "sdfRequired" is an array of JSON pointers, each indicating one declaration that is mandatory to be represented.

The example in Figure 4 shows two required elements in the sdfObject definition for "temperatureWithAlarm", the sdfProperty "currentTemperature", and the sdfEvent "overTemperatureEvent". The example also shows the use of JSON pointer with "sdfRef" to use a pre-existing definition in this definition, for the "alarmType" data (sdfOutputData) produced by the sdfEvent "overTemperatureEvent".

```

{
  "sdfObject": {
    "temperatureWithAlarm": {
      "sdfRequired": [
        "#/sdfObject/temperatureWithAlarm/sdfProperty/currentTemperature",
        "#/sdfObject/temperatureWithAlarm/sdfEvent/overTemperatureEvent"
      ],
      "sdfData": {
        "temperatureData": {
          "type": "number"
        }
      },
      "sdfProperty": {
        "currentTemperature": {
          "sdfRef": "#/sdfObject/temperatureWithAlarm/sdfData/temperatureData"
        }
      },
      "sdfEvent": {
        "overTemperatureEvent": {
          "sdfOutputData": {
            "type": "object",
            "properties": {
              "alarmType": {
                "sdfRef": "cap:/sdfData/alarmTypes/quantityAlarms",
                "const": "OverTemperatureAlarm"
              },
              "temperature": {
                "sdfRef": "#/sdfObject/temperatureWithAlarm/sdfData/temperatur
eData"
              }
            }
          }
        }
      }
    }
  }
}

```

Figure 4: Using sdfRequired

4.6. Common Qualities

Definitions in SDF share a number of qualities that provide metadata for them. These are listed in Table 3. None of these qualities are required or have default values that are assumed if the quality is absent. If a label is required for an application and no label is given in the SDF model, the last part ("reference-token", Section 3 of [RFC6901]) of the JSON pointer to the definition can be used.

Quality	Type	Description
description	text	long text (no constraints)
label	text	short text (no constraints)
\$comment	text	source code comments only, no semantics
sdfRef	sdf-pointer	(see Section 4.4)
sdfRequired	pointer-list	(see Section 4.5, applies to qualities of properties, of data)

Table 3: Common Qualities

4.7. Data Qualities

Data qualities are used in "sdfData" and "sdfProperty" definitions, which are named sets of data qualities (abbreviated as "named-sdq").

Table 4 lists data qualities borrowed from [I-D.handrews-json-schema-validation]; the intention is that these qualities retain their semantics from the versions of the json-schema.org proposal they were imported from. A description that starts with a parenthesized term means the quality is only applicable when "type" has the value of the term.

Table 5 lists data qualities defined specifically for the present specification.

The term "allowed types" stands for primitive JSON types, JSON maps ("objects") as well as homogeneous arrays of numbers, text, Booleans, or maps. (This list might be extended in a future version of SDF.) An "allowed value" is a value allowed for one of these types.

Quality	Type	Description
type	"number" / "string" / "boolean" / / "integer" / "array"	JSON data type (note 1)

	/ "object"	
const	allowed value	specifies a constant value for a data item or property
default	allowed value	specifies the default value for initialization
minimum	number	(number) lower limit of value
maximum	number	(number) upper limit of value
exclusiveMinimum	number or boolean (jso draft 7/4)	(number) lower limit of value
exclusiveMaximum	number or boolean (jso draft 7/4)	(number) lower limit of value
multipleOf	number	(number) resolution of the number [NEEDED?]
minLength	integer	(string) shortest length string in octets
maxLength	integer	(string) longest length string in octets
pattern	string	(string) regular expression to constrain a string pattern
format	"date-time" / "date" / "time" / "uri" / "uri-reference" / "uuid"	(string) JSON Schema formats as per [I-D.handrews-json-schema-validation], Section 7.3
minItems	number	(array) Minimum number of items in array
maxItems	number	(array) Maximum number of items in array

uniqueItems	boolean	(array) if true, requires items to be all different
items	(subset of common/ data qualities; see Appendix A	(array) constraints on array items
required	array of strings	(object) names of properties (note 2) that are required in the JSON map ("object")
properties	named set of data qualities	(object) entries allowed for the JSON map ("object")

Table 4: Qualities of sdfProperty and sdfData borrowed from json-schema.org

(1) A type value of "integer" means that only integral values of JSON numbers can be used.

(2) Note that the term "properties" as used for map entries in [I-D.handrews-json-schema-validation] is unrelated to sdfProperty.

Quality	Type	Description	Default
(common)		Section 4.6	
unit	string	SenML unit name as per [IANA.senml], subregistry SenML Units (note 3)	N/A
scaleMinimum	number	lower limit of value in units given by unit (note 4)	N/A
scaleMaximum	number	upper limit of value in units given by unit (note 4)	N/A
readable	boolean	Reads are allowed	true
writable	boolean	Writes are allowed	true
observable	boolean	flag to indicate asynchronous notification is available	true
nullable	boolean	indicates a null value is available for this type	true
contentFormat	string	content type (IANA media type string plus parameters), encoding	N/A
sdfType	string (Section 4.7.1)	sdfType enumeration (extensible)	N/A
sdfChoice	named set of data qualities	named alternatives	N/A
enum	array of strings	abbreviation for string-valued named alternatives	N/A

Table 5: SDF-defined Qualities of sdfProperty and sdfData

(3) note that the quality "unit" was called "units" in SDF 1.0.

(4) these qualities were included in SDF 1.0, but were not fully defined; they are not included in SDF 1.1. In 1.next, they will be replaced by qualities to express scaling that are more aligned with the processes that combine ecosystem and instance specific information with an SDF model.

4.7.1. sdfType

SDF defines a number of basic types beyond those provided by JSON or [I-D.handrews-json-schema-validation]. These types are identified by the "sdfType" quality, which is a text string from a set of type names defined by SDF.

To aid interworking with [I-D.handrews-json-schema-validation] implementations, it is RECOMMENDED that "sdfType" is always used in conjunction with the "type" quality inherited from [I-D.handrews-json-schema-validation], in such a way as to yield a common representation of the type's values in JSON.

Values for "sdfType" that are defined in SDF 1.1 are shown in Table 6. This table also gives a description of the semantics of the sdfType, the conventional value for "type" to be used with the "sdfType" value, and a conventional JSON representation for values of the type.

sdfType	Description	type	JSON Representation
byte-string	A sequence of zero or more bytes	string	base64url without padding (Section 3.4.5.2 of [RFC8949])
unix-time	A point in civil time (note 1)	number	POSIX time (Section 3.4.2 of [RFC8949])

Table 6: Values defined in SDF 1.1 for sdfType quality

(1) Note that the definition of "unix-time" does not imply the capability to represent points in time that fall on leap seconds. More date/time-related sdfTypes are likely to be added in future versions of this specification.

In SDF 1.0, a similar concept was called "subtype".

4.7.2. sdfChoice

Data can be a choice of named alternatives, called "sdfChoice". Each alternative is identified by a name (string, key in the JSON object used to represent the choice) and a set of dataqualities (object, the value in the JSON object used to represent the choice).

sdfChoice merges the functions of two constructs found in [I-D.handrews-json-schema-validation]:

* "enum"

What would have been

```
"enum": ["foo", "bar", "baz"]
```

in SDF 1.0, is often best represented as:

```
"sdfChoice": {  
  "foo": { "description": "This is a foonly"},  
  "bar": { "description": "As defined in the second world congress"},  
  "baz": { "description": "From zigbee foobaz"}  
}
```

This allows the placement of other dataqualities such as "description" in the example.

If an enum needs to use a data type different from text string, e.g. what would have been

```
"type": "number",  
"enum": [1, 2, 3]
```

in SDF 1.0, is represented as:

```
"type": "number",  
"sdfChoice": {  
  "a-better-name-for-alternative-1": { "const": 1 },  
  "alternative-2": { "const": 2 },  
  "the-third-alternative": { "const": 3 }  
}
```

where the string names obviously would be chosen in a way that is descriptive for what these numbers actually stand for; sdfChoice also makes it easy to add number ranges into the mix.

(Note that "const" can also be used for strings as in the previous example, e.g., if the actual string value is indeed a crucial element for the data model.)

* anyOf

[I-D.handrews-json-schema-validation] provides a type union called "anyOf", which provides a choice between anonymous alternatives.

What could have been

```
"anyOf": [  
  {"type": "array", "minItems": 3, "maxItems": "3", "items": {  
    "sdfRef": "rgbVal"}}  
  {"type": "array", "minItems": 4, "maxItems": "4", "items": {  
    "sdfRef": "cmykVal"}}  
]
```

in [I-D.handrews-json-schema-validation] can be more descriptively notated in SDF as:

```
"sdfChoice": {  
  "rgb": {"type": "array", "minItems": 3, "maxItems": "3", "items": {  
    "sdfRef": "rgbVal"}}  
  "cmyk": {"type": "array", "minItems": 4, "maxItems": "4", "items": {  
    "sdfRef": "cmykVal"}}  
}
```

Note that there is no need in SDF for the type intersection construct "allOf" or the peculiar type-xor construct "oneOf" found in [I-D.handrews-json-schema-validation].

As a simplification for readers of SDF specifications accustomed to the [I-D.handrews-json-schema-validation] enum keyword, this is retained, but limited to a choice of text string values, such that

```
"enum": ["foo", "bar", "baz"]
```

is syntactic sugar for

```
"sdfChoice": {  
  "foo": { "const": "foo"},  
  "bar": { "const": "bar"},  
  "baz": { "const": "baz"}  
}
```

5. Keywords for definition groups

The following SDF keywords are used to create definition groups in the target namespace. All these definitions share some common qualities as discussed in Section 4.6.

5.1. sdfObject

The `sdfObject` keyword denotes a group of zero or more Object definitions. Object definitions may contain or include definitions of Properties, Actions, Events declared for the object, as well as data types (`sdfData` group) to be used in this or other Objects.

The qualities of an `sdfObject` include the common qualities, additional qualities are shown in Table 7. None of these qualities are required or have default values that are assumed if the quality is absent.

Quality	Type	Description
(common)		Section 4.6
<code>sdfProperty</code>	property	zero or more named property definitions for this object
<code>sdfAction</code>	action	zero or more named action definitions for this object
<code>sdfEvent</code>	event	zero or more named event definitions for this object
<code>sdfData</code>	named-sdq	zero or more named data type definitions that might be used in the above

Table 7: Qualities of `sdfObject`

5.2. sdfProperty

The `sdfProperty` keyword denotes a group of zero or more Property definitions.

Properties are used to model elements of state.

The qualities of a Property definition include the data qualities (and thus the common qualities), see Section 4.7.

5.3. sdfAction

The `sdfAction` keyword denotes a group of zero or more Action definitions.

Actions are used to model commands and methods which are invoked. Actions have parameter data that are supplied upon invocation.

The qualities of an Action definition include the common qualities, additional qualities are shown in Table 8.

Quality	Type	Description
(common)		Section 4.6
<code>sdfInputData</code>	map	data qualities of the input data for an Action
<code>sdfOutputData</code>	map	data qualities of the output data for an Action
<code>sdfData</code>	named-sdq	zero or more named data type definitions that might be used in the above

Table 8: Qualities of `sdfAction`

"`sdfInputData`" defines the input data of the action. "`sdfOutputData`" defines the output data of the action. As discussed in Section 2.2.3, a set of data qualities with type "object" can be used to substructure either data item, with optionality indicated by the data quality "required".

5.4. sdfEvent

The `sdfEvent` keyword denotes zero or more Event definitions.

Events are used to model asynchronous occurrences that may be communicated proactively. Events have data elements which are communicated upon the occurrence of the event.

The qualities of `sdfEvent` include the common qualities, additional qualities are shown in Table 9.

Quality	Type	Description
(common)		Section 4.6
sdfOutputData	map	data qualities of the output data for an Event
sdfData	named-sdq	zero or more named data type definitions that might be used in the above

Table 9: Qualities of sdfEvent

"sdfOutputData" defines the output data of the action. As discussed in Section 2.2.4, a set of data qualities with type "object" can be used to substructure the output data item, with optionality indicated by the data quality "required".

5.5. sdfData

The sdfData keyword denotes a group of zero or more named data type definitions (named-sdq).

An sdfData definition provides a reusable semantic identifier for a type of data item and describes the constraints on the defined type. It is not itself a declaration, i.e., it does not cause any of these data items to be included in an affordance definition.

The qualities of sdfData include the data qualities (and thus the common qualities), see Section 4.7.

6. High Level Composition

The requirements for high level composition include the following:

- * The ability to represent products, standardized product types, and modular products while maintaining the atomicity of Objects.
- * The ability to compose a reusable definition block from Objects, for example a single plug unit of an outlet strip with on/off control, energy monitor, and optional dimmer objects, while retaining the atomicity of the individual objects.
- * The ability to compose Objects and other definition blocks into a higher level thing that represents a product, while retaining the atomicity of objects.

- * The ability to enrich and refine a base definition to have product-specific qualities and quality values, e.g. unit, range, and scale settings.
- * The ability to reference items in one part of a complex definition from another part of the same definition, for example to summarize the energy readings from all plugs in an outlet strip.

6.1. Paths in the model namespaces

The model namespace is organized according to terms that are defined in the definition files that are present in the namespace. For example, definitions that originate from an organization or vendor are expected to be in a namespace that is specific to that organization or vendor. There is expected to be an SDF namespace for common SDF definitions used in OneDM.

The structure of a path in a namespace is defined by the JSON Pointers to the definitions in the files in that namespace. For example, if there is a file defining an object "Switch" with an action "on", then the reference to the action would be "ns:/sdfObject/Switch/sdfAction/on" where "ns" is the namespace prefix (short name for the namespace).

6.2. Modular Composition

Modular composition of definitions enables an existing definition (could be in the same file or another file) to become part of a new definition by including a reference to the existing definition within the model namespace.

6.2.1. Use of the "sdfRef" keyword to re-use a definition

An existing definition may be used as a template for a new definition, that is, a new definition is created in the target namespace which uses the defined qualities of some existing definition. This pattern will use the keyword "sdfRef" as a quality of a new definition with a value consisting of a reference to the existing definition that is to be used as a template.

In the definition that uses "sdfRef", new qualities may be added and existing qualities from the referenced definition may be overridden. (Note that JSON maps (objects) do not have a defined order, so the SDF processor may see these overrides before seeing the "sdfRef".)

As a convention, overrides are intended to be used only for further restricting the set of data values, as shown in Figure 5: any value for a "cable-length" also is a valid value for a "length", with the

additional restriction that the length cannot be smaller than 5 cm. (This is labeled as a convention as it cannot be checked in the general case; a quality of implementation consideration for a tool might be to provide at least some form of checking.) Note that a description is provided that overrides the description of the referenced definition; as this quality is intended for human consumption there is no conflict with the intended goal.

```
"sdfData":
  "length" : {
    "type": "number",
    "minimum": 0,
    "unit": "m"
    "description": "There can be no negative lengths."
  }
  ...
  "cable-length" : {
    "sdfRef": "#/sdfData/length"
    "minimum": 0.05,
    "description": "Cables must be at least 5 cm."
  }
}
```

Figure 5

6.3. sdfThing

An sdfThing is a set of declarations and qualities that may be part of a more complex model. For example, the object declarations that make up the definition of a single socket of an outlet strip could be encapsulated in an sdfThing, and the socket-thing itself could be used in a declaration in the sdfThing definition for the outlet strip.

sdfThing definitions carry semantic meaning, such as a defined refrigerator compartment and a defined freezer compartment, making up a combination refrigerator-freezer product.

An sdfThing may be composed of sdfObjects and other sdfThings.

The qualities of sdfThing are shown in Table 10.

Quality	Type	Description
(common)		Section 4.6
sdfThing	thing	
sdfObject	object	

Table 10: Qualities of sdfThing
and sdfProduct

6.4. sdfProduct

An sdfProduct provides the level of abstraction for representing a unique product or a profile for a standardized type of product, for example a "device type" definition with required minimum functionality.

Products may be composed of Objects and Things at the high level, and may include their own definitions of Properties, Actions, and Events that can be used to extend or complete the included Object definitions.

Product definitions may set optional defaults and constant values for specific use cases, for example units, range, and scale settings for properties, or available parameters for Actions.

The qualities of sdfProduct are the same as for sdfThing and are shown in Table 10.

7. IANA Considerations

7.1. Media Type

IANA is requested to add the following Media-Type to the "Media Types" registry.

Name	Template	Reference
sdf+json	application/sdf+json	RFC XXXX, Section 7.1

Table 11

// RFC Ed.: please replace RFC XXXX with this RFC number and remove this note.

Type name: application
Subtype name: sdf+json
Required parameters: none
Optional parameters: none
Encoding considerations: binary (JSON is UTF-8-encoded text)
Security considerations: Section 8 of RFC XXXX
Interoperability considerations: none
Published specification: Section 7.1 of RFC XXXX
Applications that use this media type: Tools for data and interaction modeling in the Internet of Things
Fragment identifier considerations: A JSON Pointer fragment identifier may be used, as defined in Section 6 of [RFC6901].
Person & email address to contact for further information: ASDF WG mailing list (asdf@ietf.org), or IETF Applications and Real-Time Area (art@ietf.org)
Intended usage: COMMON
Restrictions on usage: none
Author/Change controller: IETF
Provisional registration: no

7.2. Registries

(TBD: After future additions, check if we need any.)

8. Security Considerations

Some wider issues are discussed in [RFC8576].

(Specifics: TBD.)

9. References

9.1. Normative References

[I-D.handrews-json-schema-validation]
Wright, A., Andrews, H., and B. Hutton, "JSON Schema Validation: A Vocabulary for Structural Validation of JSON", Work in Progress, Internet-Draft, draft-handrews-json-schema-validation-02, 17 September 2019, <<https://www.ietf.org/archive/id/draft-handrews-json-schema-validation-02.txt>>.

- [I-D.ietf-cbor-cddl-control]
Bormann, C., "Additional Control Operators for CDDL", Work in Progress, Internet-Draft, draft-ietf-cbor-cddl-control-03, 7 March 2021, <<https://www.ietf.org/archive/id/draft-ietf-cbor-cddl-control-03.txt>>.
- [IANA.senml]
IANA, "Sensor Measurement Lists (SenML)", <<http://www.iana.org/assignments/senml>>.
- [RFC0020] Cerf, V., "ASCII format for network interchange", STD 80, RFC 20, DOI 10.17487/RFC0020, October 1969, <<https://www.rfc-editor.org/info/rfc20>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, DOI 10.17487/RFC3986, January 2005, <<https://www.rfc-editor.org/info/rfc3986>>.
- [RFC6901] Bryan, P., Ed., Zyp, K., and M. Nottingham, Ed., "JavaScript Object Notation (JSON) Pointer", RFC 6901, DOI 10.17487/RFC6901, April 2013, <<https://www.rfc-editor.org/info/rfc6901>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8610] Birkholz, H., Vigano, C., and C. Bormann, "Concise Data Definition Language (CDDL): A Notational Convention to Express Concise Binary Object Representation (CBOR) and JSON Data Structures", RFC 8610, DOI 10.17487/RFC8610, June 2019, <<https://www.rfc-editor.org/info/rfc8610>>.
- [RFC8949] Bormann, C. and P. Hoffman, "Concise Binary Object Representation (CBOR)", STD 94, RFC 8949, DOI 10.17487/RFC8949, December 2020, <<https://www.rfc-editor.org/info/rfc8949>>.
- [SPDX] "SPDX License List", <<https://spdx.org/licenses/>>.

[W3C.NOTE-curie-20101216]

Birbeck, M. and S. McCarron, "CURIE Syntax 1.0", World Wide Web Consortium NOTE NOTE-curie-20101216, 16 December 2010, <<https://www.w3.org/TR/2010/NOTE-curie-20101216>>.

9.2. Informative References

[I-D.irtf-t2trg-rest-iot]

Keranen, A., Kovatsch, M., and K. Hartke, "RESTful Design for Internet of Things Systems", Work in Progress, Internet-Draft, draft-irtf-t2trg-rest-iot-07, 22 February 2021, <<https://www.ietf.org/archive/id/draft-irtf-t2trg-rest-iot-07.txt>>.

[OCF]

"OCF Resource Type Specification", <https://openconnectivity.org/specs/OCF_Resource_Type_Specification.pdf>.

[OMA]

"OMA LightweightM2M (LwM2M) Object and Resource Registry", <<http://www.openmobilealliance.org/wp/omna/lwm2m/lwm2mregistry.html>>.

[RFC3339]

Klyne, G. and C. Newman, "Date and Time on the Internet: Timestamps", RFC 3339, DOI 10.17487/RFC3339, July 2002, <<https://www.rfc-editor.org/info/rfc3339>>.

[RFC8576]

Garcia-Morchon, O., Kumar, S., and M. Sethi, "Internet of Things (IoT) Security: State of the Art and Challenges", RFC 8576, DOI 10.17487/RFC8576, April 2019, <<https://www.rfc-editor.org/info/rfc8576>>.

[ZCL]

"The ZigBee Cluster Library", Zigbee Wireless Networking pp. 239-271, DOI 10.1016/b978-0-7506-8597-9.00006-9, 2008, <<https://doi.org/10.1016/b978-0-7506-8597-9.00006-9>>.

Appendix A. Formal Syntax of SDF

This appendix describes the syntax of SDF using CDDL [RFC8610]. Note that this appendix was derived from Ari Keranen's "alt-schema" and Michael Koster's "schema", with a view of covering the syntax that is currently in use at the One Data Model "playground" repository.

This appendix shows the framework syntax only, i.e., a syntax with liberal extension points. Since this syntax is nearly useless in finding typos in an SDF specification, a second syntax, the validation syntax, is defined that does not include the extension points. The validation syntax can be generated from the framework syntax by leaving out all lines containing the string "EXTENSION-POINT"; as this is trivial, the result is not shown here.

This appendix makes use of CDDL "features" as defined in Section 4 of [I-D.ietf-chor-cddl-control]. A feature named "1.0" is used to indicate parts of the syntax being deprecated towards SDF 1.1, and a feature named "1.1" is used to indicate new syntax intended for SDF 1.1. Features whose names end in "-ext" indicate extension points for further evolution.

```

start = sdf-syntax

sdf-syntax = {
  ? info: sdfinfo           ; This will be required in most process poli
cies, but not a syntax error
  ? namespace: named<text>
  ? defaultNamespace: text
  ? sdfThing: named<thingqualities> ; Thing is a composition of objects t
hat work together in some way
  ? sdfProduct: named<productqualities> ; Product is a composition of things
and objects that can model a SKU-level instance of a product
  ? sdfObject: named<objectqualities> ; Object is a set of Properties, Acti
ons, and Events that together perform a particular function
  ? sdfProperty: named<propertyqualities> ; Property represents the state of an
instance of an object
  ? sdfAction: named<actionqualities> ; Action is a directive to invoke an
application layer verb associated with an object
  ? sdfEvent: named<eventqualities> ; Event represents an occurrence of so
mething associated with an object
  ? sdfData: named<dataqualities> ; Data represents a piece of informat
ion that can be the state of a property or a parameter to an action or a signal i
n an event
  EXTENSION-POINT<"top-ext">
}

sdfinfo = {
  title: text
  version: text
  copyright: text
  license: text
  EXTENSION-POINT<"info-ext">
}

; Shortcut for a map that gives names to instances of X (has text keys and val
ues of type X)
named<X> = { * text => X }

EXTENSION-POINT<f> = ( * (text .feature f) => any ) ; only used in framework s
yntax

sdf-pointer = text ; .regexp curie-regexp -- TO DO!
pointer-list = [* sdf-pointer] ; ISSUE: no point in having an empty list, no?
but used for sdfRequired in odmobject-multiple_axis_joystick.sdf.json

```

commonqualities = (

Koster & Bormann

Expires 12 September 2021

[Page 35]

```

? description: text           ; long text (no constraints)
? label: text                 ; short text (no constraints); default to key
? $comment: text             ; source code comments only, no semantics
? sdfRef: sdf-pointer
? sdfRequired: pointer-list   ; applies to qualities of properties, of data
)

; for building hierarchy
thingqualities = {
  commonqualities,
  ? sdfObject: named<objectqualities>
  ? sdfThing: named<thingqualities>
  EXTENSION-POINT<"thing-ext">
}

productqualities = thingqualities ; ISSUE: get rid of sdfProduct?

; for single objects
objectqualities = {
  commonqualities,
  ? sdfProperty: named<propertyqualities>
  ? sdfAction: named<actionqualities>
  ? sdfEvent: named<eventqualities>
  ? sdfData: named<dataqualities>
  EXTENSION-POINT<"object-ext">
}

propertyqualities = dataqualities ; the definitions in sdfData are declarations
in sdfProperty

parameter-list =
  pointer-list .feature (["1.0", "pointerlist-as-parameter"]) /
  dataqualities .feature (["1.1", "dataqualities-as-parameter"])

actionqualities = {
  commonqualities,
  ? sdfInputData: parameter-list ; sdfRequiredInputData applies here (a bit r
edundant)
  ? ("sdfRequiredInputData" .feature "1.0") => pointer-list
  ? sdfOutputData: parameter-list ; sdfRequired applies here
  ? sdfData: named<dataqualities> ; zero or more named data type defini
tions that might be used in the above
  EXTENSION-POINT<"action-ext">
}

eventqualities = {
  commonqualities
  ? sdfOutputData: parameter-list ; sdfRequired applies here
  ? sdfData: named<dataqualities> ; zero or more named data type defini
tions that might be used in the above
  EXTENSION-POINT<"event-ext">
}

```

```

dataqualities = {
    commonqualities,
    jsonschema,
    ? ("units" .feature "1.0") => text
    ? ("unit" .feature "1.1") => text
    ? ("scaleMinimum" .feature "1.0") => number
    ? ("scaleMaximum" .feature "1.0") => number
    ? observable: bool
    ? readable: bool
    ? writable: bool
    ? nullable: bool
    ? ("subtype" .feature "1.0") => "byte-string" / "unix-time"
      / (text .feature "subtype-ext") ; EXTENSION-
POINT
    ? ("sdfType" .feature "1.1") => "byte-string" / "unix-time"
      / (text .feature "sdftype-ext") ; EXTENSION-
POINT
    ? contentFormat: text
    EXTENSION-POINT<"data-ext">
}

allowed-types = number / text / bool / null
                / [* number] / [* text] / [* bool]
                / {* text => any}
                / (any .feature "allowed-ext") ; EXTENSION-P
OINT

compound-type = (
    "type" => ("object" .feature "1.1"),
    ? required: [+text],
    ? properties: named<dataqualities>,
)

choice-type = (
    ("sdfChoice" .feature "1.1") => named<dataqualities>
)

jsonschema = (
    ? (("type" => "number" / "string" / "boolean" / "integer" / "array")
      // compound-type
      // choice-type
      // (type: text .feature "type-ext") ; EXTENSION-POIN
T
    )
    ? "enum" => [+ text] ; limited to text strings in SDF 1.1
    ? ("enum" .feature "1.0") => [+ allowed-types] ; should validate against t
ype
    ? const: allowed-types ; should validate against t
ype
    ? default: allowed-types ; should validate against t
ype
    ; number/integer constraints
    ? minimum: number
    ? maximum: number
    ? exclusiveMinimum: bool / number ; jso draft 4/7

```



```

? exclusiveMaximum: bool / number          ; jso draft 4/7
? multipleOf: number                       ; ISSUE: Do we need this?
; text string constraints
? minLength: number
? maxLength: number
? pattern: text                            ; regexp
? format: "date-time" / "date" / "time"
      / "uri" / "uri-reference" / "uuid"
      / (text .feature "format-ext")       ; EXTENSION-PO
INT
; array constraints
? minItems: number
? maxItems: number
? uniqueItems: bool
? items: { ;;; ultimately, this will be mostly recursive, but, for now
      ;;; let's find out what we actually need
      ? sdfRef: sdf-pointer                ; import limited to the subset that we all
ow here...
      ? description: text                  ; long text (no constraints)
      ? $comment: text                    ; source code comments only, no semantics
      ; commonqualities, ; -- ISSUE: should leave this out for non-complex data
types, but need the above three
      ? ((type: "number" / "string" / "boolean" / "integer") ; no "array"
        // compound-type
        // choice-type                      ; do we really need arrays of choices?
        // (type: text .feature "itemtype-ext") ; EXTENS
ION-POINT
      )
      ; jso subset
      ? minimum: number
      ? maximum: number
      ? "enum" => [+ text] ; limited to text strings in SDF 1.1
      ? ("enum" .feature "1.0") => [+ any]
      ? format: text
      ? minLength: number
      ? maxLength: number
      EXTENSION-POINT<"items-ext">
    }
  )

```

Appendix B. json-schema.org Rendition of SDF Syntax

This appendix describes the syntax of SDF defined in Appendix A, but using a version of the description techniques advertised on json-schema.org [I-D.handrews-json-schema-validation].

The appendix shows both the validation and the framework syntax. Since most of the lines are the same between these two files, those lines are shown only once, with a leading space, in the form of a unified diff. Lines leading with a "-" are part of the validation syntax, and lines leading with a "+" are part of the framework syntax.


```
{
-  "title": "sdf-validation.cddl",
+  "title": "sdf-framework.cddl",
  "$schema": "http://json-schema.org/draft-07/schema#",
  "$ref": "#/definitions/sdf-syntax",
  "definitions": {
    "sdf-syntax": {
      "type": "object",
      "properties": {
        "info": {
          "$ref": "#/definitions/sdfinfo"
        },
        "namespace": {
          "type": "object",
          "additionalProperties": {
            "type": "string"
          }
        },
        "defaultNamespace": {
          "type": "string"
        },
        "sdfThing": {
          "type": "object",
          "additionalProperties": {
            "$ref": "#/definitions/thingqualities"
          }
        },
        "sdfProduct": {
          "type": "object",
          "additionalProperties": {
            "$ref": "#/definitions/productqualities"
          }
        },
        "sdfObject": {
          "type": "object",
          "additionalProperties": {
            "$ref": "#/definitions/objectqualities"
          }
        },
        "sdfProperty": {
          "type": "object",
          "additionalProperties": {
            "$ref": "#/definitions/propertyqualities"
          }
        },
        "sdfAction": {
          "type": "object",
          "additionalProperties": {
```

```
        "$ref": "#/definitions/actionqualities"
      }
    },
    "sdfEvent": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/eventqualities"
      }
    },
    "sdfData": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/dataqualities"
      }
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
"sdfinfo": {
  "type": "object",
  "required": [
    "title",
    "version",
    "copyright",
    "license"
  ],
  "properties": {
    "title": {
      "type": "string"
    },
    "version": {
      "type": "string"
    },
    "copyright": {
      "type": "string"
    },
    "license": {
      "type": "string"
    }
  }
},
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
"thingqualities": {
  "type": "object",
```

```
    "properties": {
      "description": {
        "type": "string"
      },
      "label": {
        "type": "string"
      },
      "$comment": {
        "type": "string"
      },
      "sdfRef": {
        "$ref": "#/definitions/sdf-pointer"
      },
      "sdfRequired": {
        "$ref": "#/definitions/pointer-list"
      },
      "sdfObject": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/objectqualities"
        }
      },
      "sdfThing": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/thingqualities"
        }
      }
    },
-   "additionalProperties": false
+   "additionalProperties": {
+   }
  },
  "sdf-pointer": {
    "type": "string"
  },
  "pointer-list": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/sdf-pointer"
    }
  },
  "objectqualities": {
    "type": "object",
    "properties": {
      "description": {
        "type": "string"
      },
    },
  },

```

```
    "label": {
      "type": "string"
    },
    "$comment": {
      "type": "string"
    },
    "sdfRef": {
      "$ref": "#/definitions/sdf-pointer"
    },
    "sdfRequired": {
      "$ref": "#/definitions/pointer-list"
    },
    "sdfProperty": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/propertyqualities"
      }
    },
    "sdfAction": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/actionqualities"
      }
    },
    "sdfEvent": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/eventqualities"
      }
    },
    "sdfData": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/dataqualities"
      }
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
"propertyqualities": {
  "$ref": "#/definitions/dataqualities"
},
"dataqualities": {
  "anyOf": [
    {
      "type": "object",
```

```
"properties": {
  "type": {
    "type": "string",
    "enum": [
      "number",
      "string",
      "boolean",
      "integer",
      "array"
    ]
  },
  "enum": {
    "type": "array",
    "items": {
      "type": "string"
    },
    "$ref": "#/definitions/allowed-types"
  },
  "minItems": 1
},
"const": {
  "$ref": "#/definitions/allowed-types"
},
"default": {
  "$ref": "#/definitions/allowed-types"
},
"minimum": {
  "type": "number"
},
"maximum": {
  "type": "number"
},
"exclusiveMinimum": {
  "anyOf": [
    {
      "type": "boolean"
    },
    {
      "type": "number"
    }
  ]
},
"exclusiveMaximum": {
  "anyOf": [
    {
      "type": "boolean"
    },
    {
      "type": "number"
    }
  ]
}
```

```
    }
  ]
},
"multipleOf": {
  "type": "number"
},
"minLength": {
  "type": "number"
},
"maxLength": {
  "type": "number"
},
"pattern": {
  "type": "string"
},
"format": {
-   "type": "string",
-   "enum": [
-     "date-time",
-     "date",
-     "time",
-     "uri",
-     "uri-reference",
-     "uuid"
+   "anyOf": [
+     {
+       "type": "string",
+       "const": "date-time"
+     },
+     {
+       "type": "string",
+       "const": "date"
+     },
+     {
+       "type": "string",
+       "const": "time"
+     },
+     {
+       "type": "string",
+       "const": "uri"
+     },
+     {
+       "type": "string",
+       "const": "uri-reference"
+     },
+     {
+       "type": "string",
+       "const": "uuid"
```

```
+         },
+         {
+           "type": "string"
+         }
+       ]
+     },
+     "minItems": {
+       "type": "number"
+     },
+     "maxItems": {
+       "type": "number"
+     },
+     "uniqueItems": {
+       "type": "boolean"
+     },
+     "items": {
+       "anyOf": [
+         {
+           "type": "object",
+           "properties": {
+             "type": {
+               "type": "string",
+               "enum": [
+                 "number",
+                 "string",
+                 "boolean",
+                 "integer"
+               ]
+             }
+           }
+         },
+         {
+           "sdfRef": {
+             "$ref": "#/definitions/sdf-pointer"
+           }
+         },
+         {
+           "description": {
+             "type": "string"
+           }
+         },
+         {
+           "$comment": {
+             "type": "string"
+           }
+         },
+         {
+           "minimum": {
+             "type": "number"
+           }
+         },
+         {
+           "maximum": {
+             "type": "number"
+           }
+         },
+         {
+           "enum": {
+             "type": "array",
+             "items": {
+               "type": "string"
+             }
+           }
+         }
+       ]
+     }
+   }
+ }
```

```

-         },
          "minItems": 1
        },
        "format": {
          "type": "string"
        },
        "minLength": {
          "type": "number"
        },
        "maxLength": {
          "type": "number"
        }
      },
-     "additionalProperties": false
+     "additionalProperties": {
+   }
  },
  {
    "type": "object",
    "properties": {
      "type": {
        "type": "string",
        "const": "object"
      },
      "required": {
        "type": "array",
        "items": {
          "type": "string"
        },
        "minItems": 1
      },
      "properties": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/dataqualities"
        }
      },
      "sdfRef": {
        "$ref": "#/definitions/sdf-pointer"
      },
      "description": {
        "type": "string"
      },
      "$comment": {
        "type": "string"
      },
      "minimum": {
        "type": "number"
      }
    }
  }

```



```
    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
-     "items": {
-       "type": "string"
-     },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
{
  "type": "object",
  "properties": {
    "sdfChoice": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/dataqualities"
      }
    },
    "sdfRef": {
      "$ref": "#/definitions/sdf-pointer"
    },
    "description": {
      "type": "string"
    },
    "$comment": {
      "type": "string"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    }
  }
}
```

```
    },
    "enum": {
      "type": "array",
      "items": {
        "type": "string"
      },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
  "additionalProperties": false
},
"additionalProperties": {
}
},
{
  "type": "object",
  "properties": {
    "type": {
      "type": "string"
    },
    "sdfRef": {
      "$ref": "#/definitions/sdf-pointer"
    },
    "description": {
      "type": "string"
    },
    "$comment": {
      "type": "string"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
      "minItems": 1
    },
    "format": {
```

```
+         "type": "string"
+     },
+     "minLength": {
+         "type": "number"
+     },
+     "maxLength": {
+         "type": "number"
+     }
+     },
+     "additionalProperties": {
+     }
+     }
+ ]
+ },
+ "description": {
+     "type": "string"
+ },
+ "label": {
+     "type": "string"
+ },
+ "$comment": {
+     "type": "string"
+ },
+ "sdfRef": {
+     "$ref": "#/definitions/sdf-pointer"
+ },
+ "sdfRequired": {
+     "$ref": "#/definitions/pointer-list"
+ },
+ "units": {
+     "type": "string"
+ },
+ "unit": {
+     "type": "string"
+ },
+ "scaleMinimum": {
+     "type": "number"
+ },
+ "scaleMaximum": {
+     "type": "number"
+ },
+ "observable": {
+     "type": "boolean"
+ },
+ "readable": {
+     "type": "boolean"
+ },
+ "writable": {
```

```
        "type": "boolean"
      },
      "nullable": {
        "type": "boolean"
      },
+     "subtype": {
+       "anyOf": [
+         {
+           "type": "string",
+           "const": "byte-string"
+         },
+         {
+           "type": "string",
+           "const": "unix-time"
+         },
+         {
+           "type": "string"
+         }
+       ]
+     },
-     "sdfType": {
-       "type": "string",
-       "enum": [
-         "byte-string",
-         "unix-time"
+       "anyOf": [
+         {
+           "type": "string",
+           "const": "byte-string"
+         },
+         {
+           "type": "string",
+           "const": "unix-time"
+         },
+         {
+           "type": "string"
+         }
+       ]
+     },
      "contentFormat": {
        "type": "string"
      }
    },
-   "additionalProperties": false
+   "additionalProperties": {
+   }
  },
  {
```

```
    "type": "object",
    "properties": {
      "type": {
        "type": "string",
        "const": "object"
      },
      "required": {
        "type": "array",
        "items": {
          "type": "string"
        },
        "minItems": 1
      },
      "properties": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/dataqualities"
        }
      },
      "enum": {
        "type": "array",
        "items": {
          "type": "string"
        },
        "$ref": "#/definitions/allowed-types"
      },
      "minItems": 1
    },
    "const": {
      "$ref": "#/definitions/allowed-types"
    },
    "default": {
      "$ref": "#/definitions/allowed-types"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    },
    "exclusiveMinimum": {
      "anyOf": [
        {
          "type": "boolean"
        },
        {
          "type": "number"
        }
      ]
    }
  ]

```

```
    },
    "exclusiveMaximum": {
      "anyOf": [
        {
          "type": "boolean"
        },
        {
          "type": "number"
        }
      ]
    },
    "multipleOf": {
      "type": "number"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    },
    "pattern": {
      "type": "string"
    },
    "format": {
      "type": "string",
      "enum": [
        "date-time",
        "date",
        "time",
        "uri",
        "uri-reference",
        "uuid"
      ],
      "anyOf": [
        {
          "type": "string",
          "const": "date-time"
        },
        {
          "type": "string",
          "const": "date"
        },
        {
          "type": "string",
          "const": "time"
        },
        {
          "type": "string",
          "const": "uri"
        }
      ]
    }
  }
}
```

```
+           },
+           {
+             "type": "string",
+             "const": "uri-reference"
+           },
+           {
+             "type": "string",
+             "const": "uuid"
+           },
+           {
+             "type": "string"
+           }
+         ]
+       },
+       "minItems": {
+         "type": "number"
+       },
+       "maxItems": {
+         "type": "number"
+       },
+       "uniqueItems": {
+         "type": "boolean"
+       },
+       "items": {
+         "anyOf": [
+           {
+             "type": "object",
+             "properties": {
+               "type": {
+                 "type": "string",
+                 "enum": [
+                   "number",
+                   "string",
+                   "boolean",
+                   "integer"
+                 ]
+               }
+             }
+           },
+           {
+             "sdfRef": {
+               "$ref": "#/definitions/sdf-pointer"
+             }
+           },
+           {
+             "description": {
+               "type": "string"
+             }
+           },
+           {
+             "$comment": {
+               "type": "string"
+             }
+           },
+           {
+             "minimum": {
+               "type": "number"
+             }
+           }
+         ]
+       }
+     }
+   }
+ }
```

```

    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
-     "items": {
-       "type": "string"
-     },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
{
  "type": "object",
  "properties": {
    "type": {
      "type": "string",
      "const": "object"
    },
  },
  "required": {
    "type": "array",
    "items": {
      "type": "string"
    },
    "minItems": 1
  },
  "properties": {
    "type": "object",
    "additionalProperties": {
      "$ref": "#/definitions/dataqualities"
    }
  },
  "sdfRef": {
    "$ref": "#/definitions/sdf-pointer"
  },
},

```



```

    "description": {
      "type": "string"
    },
    "$comment": {
      "type": "string"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
      "items": {
-       "type": "string"
-     },
-     "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
{
  "type": "object",
  "properties": {
    "sdfChoice": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/dataqualities"
      }
    },
    "sdfRef": {
      "$ref": "#/definitions/sdf-pointer"
    },
    "description": {
      "type": "string"
    }
  },

```

```
    "$comment": {
      "type": "string"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
      "items": {
        "type": "string"
      },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
  "additionalProperties": false
+ "additionalProperties": {
+ }
+ },
+ {
+   "type": "object",
+   "properties": {
+     "type": {
+       "type": "string"
+     },
+     "sdfRef": {
+       "$ref": "#/definitions/sdf-pointer"
+     },
+     "description": {
+       "type": "string"
+     },
+     "$comment": {
+       "type": "string"
+     },
+     "minimum": {
+       "type": "number"
+     }
+   },
+ }
```

```
+         "maximum": {
+           "type": "number"
+         },
+         "enum": {
+           "type": "array",
+           "minItems": 1
+         },
+         "format": {
+           "type": "string"
+         },
+         "minLength": {
+           "type": "number"
+         },
+         "maxLength": {
+           "type": "number"
+         }
+       },
+       "additionalProperties": {
+     }
+   }
+ ]
+ },
+ "description": {
+   "type": "string"
+ },
+ "label": {
+   "type": "string"
+ },
+ "$comment": {
+   "type": "string"
+ },
+ "sdfRef": {
+   "$ref": "#/definitions/sdf-pointer"
+ },
+ "sdfRequired": {
+   "$ref": "#/definitions/pointer-list"
+ },
+ "units": {
+   "type": "string"
+ },
+ "unit": {
+   "type": "string"
+ },
+ "scaleMinimum": {
+   "type": "number"
+ },
+ "scaleMaximum": {
+   "type": "number"
```

```
+      },
+      "observable": {
+        "type": "boolean"
+      },
+      "readable": {
+        "type": "boolean"
+      },
+      "writable": {
+        "type": "boolean"
+      },
+      "nullable": {
+        "type": "boolean"
+      },
+      "subtype": {
+      +      "anyOf": [
+      +        {
+      +          "type": "string",
+      +          "const": "byte-string"
+      +        },
+      +        {
+      +          "type": "string",
+      +          "const": "unix-time"
+      +        },
+      +        {
+      +          "type": "string"
+      +        }
+      +      ]
+    },
+    "sdfType": {
-    "type": "string",
-    "enum": [
-      "byte-string",
-      "unix-time"
+    "anyOf": [
+      {
+        "type": "string",
+        "const": "byte-string"
+      },
+      {
+        "type": "string",
+        "const": "unix-time"
+      },
+      {
+        "type": "string"
+      }
+    ]
+  },
+  "contentFormat": {
```

```
        "type": "string"
      }
    },
-   "additionalProperties": false
+   "additionalProperties": {
+     }
  },
  {
    "type": "object",
    "properties": {
      "sdfChoice": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/dataqualities"
        }
      },
      "enum": {
        "type": "array",
        "items": {
-         "type": "string"
+         "$ref": "#/definitions/allowed-types"
        },
        "minItems": 1
      },
      "const": {
        "$ref": "#/definitions/allowed-types"
      },
      "default": {
        "$ref": "#/definitions/allowed-types"
      },
      "minimum": {
        "type": "number"
      },
      "maximum": {
        "type": "number"
      },
      "exclusiveMinimum": {
        "anyOf": [
          {
            "type": "boolean"
          },
          {
            "type": "number"
          }
        ]
      },
      "exclusiveMaximum": {
        "anyOf": [
```

```
        {
          "type": "boolean"
        },
        {
          "type": "number"
        }
      ]
    },
    "multipleOf": {
      "type": "number"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    },
    "pattern": {
      "type": "string"
    },
    "format": {
      "type": "string",
      "enum": [
        "date-time",
        "date",
        "time",
        "uri",
        "uri-reference",
        "uuid"
      ],
      "anyOf": [
        {
          "type": "string",
          "const": "date-time"
        },
        {
          "type": "string",
          "const": "date"
        },
        {
          "type": "string",
          "const": "time"
        },
        {
          "type": "string",
          "const": "uri"
        },
        {
          "type": "string",

```

```
+           "const": "uri-reference"
+         },
+         {
+           "type": "string",
+           "const": "uuid"
+         },
+         {
+           "type": "string"
+         }
+       ]
+     },
+     "minItems": {
+       "type": "number"
+     },
+     "maxItems": {
+       "type": "number"
+     },
+     "uniqueItems": {
+       "type": "boolean"
+     },
+     "items": {
+       "anyOf": [
+         {
+           "type": "object",
+           "properties": {
+             "type": {
+               "type": "string",
+               "enum": [
+                 "number",
+                 "string",
+                 "boolean",
+                 "integer"
+               ]
+             },
+             "sdfRef": {
+               "$ref": "#/definitions/sdf-pointer"
+             },
+             "description": {
+               "type": "string"
+             },
+             "$comment": {
+               "type": "string"
+             },
+             "minimum": {
+               "type": "number"
+             },
+             "maximum": {
+               "type": "number"
+             }
+           }
+         }
+       ]
+     }
+   }
+ }
```

```

    },
    "enum": {
      "type": "array",
-     "items": {
-       "type": "string"
-     },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
-  "additionalProperties": false
+  "additionalProperties": {
+  }
},
{
  "type": "object",
  "properties": {
    "type": {
      "type": "string",
      "const": "object"
    },
  },
  "required": {
    "type": "array",
    "items": {
      "type": "string"
    },
    "minItems": 1
  },
  "properties": {
    "type": "object",
    "additionalProperties": {
      "$ref": "#/definitions/dataqualities"
    }
  },
  "sdfRef": {
    "$ref": "#/definitions/sdf-pointer"
  },
  "description": {
    "type": "string"
  },
},

```



```

    "$comment": {
      "type": "string"
    },
    "minimum": {
      "type": "number"
    },
    "maximum": {
      "type": "number"
    },
    "enum": {
      "type": "array",
      "items": {
        "type": "string"
      },
      "minItems": 1
    },
    "format": {
      "type": "string"
    },
    "minLength": {
      "type": "number"
    },
    "maxLength": {
      "type": "number"
    }
  },
  "additionalProperties": false
+  "additionalProperties": {
+  }
},
{
  "type": "object",
  "properties": {
    "sdfChoice": {
      "type": "object",
      "additionalProperties": {
        "$ref": "#/definitions/dataqualities"
      }
    },
    "sdfRef": {
      "$ref": "#/definitions/sdf-pointer"
    },
    "description": {
      "type": "string"
    },
    "$comment": {
      "type": "string"
    }
  },

```

```
        "minimum": {
          "type": "number"
        },
        "maximum": {
          "type": "number"
        },
        "enum": {
          "type": "array",
-         "items": {
-           "type": "string"
-         },
          "minItems": 1
        },
        "format": {
          "type": "string"
        },
        "minLength": {
          "type": "number"
        },
        "maxLength": {
          "type": "number"
        }
      },
-     "additionalProperties": false
+     "additionalProperties": {
+     }
+   },
+   {
+     "type": "object",
+     "properties": {
+       "type": {
+         "type": "string"
+       },
+       "sdfRef": {
+         "$ref": "#/definitions/sdf-pointer"
+       },
+       "description": {
+         "type": "string"
+       },
+       "$comment": {
+         "type": "string"
+       },
+       "minimum": {
+         "type": "number"
+       },
+       "maximum": {
+         "type": "number"
+       }
+     },
+   },
```

```
+           "enum": {
+             "type": "array",
+             "minItems": 1
+           },
+           "format": {
+             "type": "string"
+           },
+           "minLength": {
+             "type": "number"
+           },
+           "maxLength": {
+             "type": "number"
+           }
+         },
+         "additionalProperties": {
+           }
+       }
+     ]
+   },
+   "description": {
+     "type": "string"
+   },
+   "label": {
+     "type": "string"
+   },
+   "$comment": {
+     "type": "string"
+   },
+   "sdfRef": {
+     "$ref": "#/definitions/sdf-pointer"
+   },
+   "sdfRequired": {
+     "$ref": "#/definitions/pointer-list"
+   },
+   "units": {
+     "type": "string"
+   },
+   "unit": {
+     "type": "string"
+   },
+   "scaleMinimum": {
+     "type": "number"
+   },
+   "scaleMaximum": {
+     "type": "number"
+   },
+   "observable": {
+     "type": "boolean"
+   }
```

```
    },
    "readable": {
      "type": "boolean"
    },
    "writable": {
      "type": "boolean"
    },
    "nullable": {
      "type": "boolean"
    },
-   "sdfType": {
-     "type": "string",
-     "enum": [
-       "byte-string",
-       "unix-time"
-     ]
-   },
+   "subtype": {
+     "anyOf": [
+       {
+         "type": "string",
+         "const": "byte-string"
+       },
+       {
+         "type": "string",
+         "const": "unix-time"
+       },
+       {
+         "type": "string"
+       }
+     ]
+   },
+   "sdfType": {
+     "anyOf": [
+       {
+         "type": "string",
+         "const": "byte-string"
+       },
+       {
+         "type": "string",
+         "const": "unix-time"
+       },
+       {
+         "type": "string"
+       }
+     ]
+   },
+   "contentFormat": {
```

```
        "type": "string"
      }
    },
-   "additionalProperties": false
+   "additionalProperties": {
+   }
+ },
+ {
+   "type": "object",
+   "properties": {
+     "type": {
+       "type": "string"
+     },
+     "enum": {
+       "type": "array",
+       "items": {
+         "$ref": "#/definitions/allowed-types"
+       },
+       "minItems": 1
+     },
+     "const": {
+       "$ref": "#/definitions/allowed-types"
+     },
+     "default": {
+       "$ref": "#/definitions/allowed-types"
+     },
+     "minimum": {
+       "type": "number"
+     },
+     "maximum": {
+       "type": "number"
+     },
+     "exclusiveMinimum": {
+       "anyOf": [
+         {
+           "type": "boolean"
+         },
+         {
+           "type": "number"
+         }
+       ]
+     },
+     "exclusiveMaximum": {
+       "anyOf": [
+         {
+           "type": "boolean"
+         },
+         {
```

```
+         "type": "number"
+     }
+ ]
+ },
+ "multipleOf": {
+     "type": "number"
+ },
+ "minLength": {
+     "type": "number"
+ },
+ "maxLength": {
+     "type": "number"
+ },
+ "pattern": {
+     "type": "string"
+ },
+ "format": {
+     "anyOf": [
+         {
+             "type": "string",
+             "const": "date-time"
+         },
+         {
+             "type": "string",
+             "const": "date"
+         },
+         {
+             "type": "string",
+             "const": "time"
+         },
+         {
+             "type": "string",
+             "const": "uri"
+         },
+         {
+             "type": "string",
+             "const": "uri-reference"
+         },
+         {
+             "type": "string",
+             "const": "uuid"
+         },
+         {
+             "type": "string"
+         }
+     ]
+ },
+ "minItems": {
```

```
+         "type": "number"
+     },
+     "maxItems": {
+         "type": "number"
+     },
+     "uniqueItems": {
+         "type": "boolean"
+     },
+     "items": {
+         "anyOf": [
+             {
+                 "type": "object",
+                 "properties": {
+                     "type": {
+                         "type": "string",
+                         "enum": [
+                             "number",
+                             "string",
+                             "boolean",
+                             "integer"
+                         ]
+                     },
+                     "sdfRef": {
+                         "$ref": "#/definitions/sdf-pointer"
+                     },
+                     "description": {
+                         "type": "string"
+                     },
+                     "$comment": {
+                         "type": "string"
+                     },
+                     "minimum": {
+                         "type": "number"
+                     },
+                     "maximum": {
+                         "type": "number"
+                     },
+                     "enum": {
+                         "type": "array",
+                         "minItems": 1
+                     },
+                     "format": {
+                         "type": "string"
+                     },
+                     "minLength": {
+                         "type": "number"
+                     },
+                     "maxLength": {
```

```
+         "type": "number"
+     }
+ },
+ "additionalProperties": {
+ }
+ },
+ {
+     "type": "object",
+     "properties": {
+         "type": {
+             "type": "string",
+             "const": "object"
+         },
+         "required": {
+             "type": "array",
+             "items": {
+                 "type": "string"
+             },
+             "minItems": 1
+         },
+         "properties": {
+             "type": "object",
+             "additionalProperties": {
+                 "$ref": "#/definitions/dataqualities"
+             }
+         },
+         "sdfRef": {
+             "$ref": "#/definitions/sdf-pointer"
+         },
+         "description": {
+             "type": "string"
+         },
+         "$comment": {
+             "type": "string"
+         },
+         "minimum": {
+             "type": "number"
+         },
+         "maximum": {
+             "type": "number"
+         },
+         "enum": {
+             "type": "array",
+             "minItems": 1
+         },
+         "format": {
+             "type": "string"
+         }
+     },
```



```
+           "minLength": {
+             "type": "number"
+           },
+           "maxLength": {
+             "type": "number"
+           }
+         },
+         "additionalProperties": {
+         }
+       },
+     {
+       "type": "object",
+       "properties": {
+         "sdfChoice": {
+           "type": "object",
+           "additionalProperties": {
+             "$ref": "#/definitions/dataqualities"
+           }
+         },
+         "sdfRef": {
+           "$ref": "#/definitions/sdf-pointer"
+         },
+         "description": {
+           "type": "string"
+         },
+         "$comment": {
+           "type": "string"
+         },
+         "minimum": {
+           "type": "number"
+         },
+         "maximum": {
+           "type": "number"
+         },
+         "enum": {
+           "type": "array",
+           "minItems": 1
+         },
+         "format": {
+           "type": "string"
+         },
+         "minLength": {
+           "type": "number"
+         },
+         "maxLength": {
+           "type": "number"
+         }
+       }
+     },
+   ],
+ },
```

```
+           "additionalProperties": {
+             }
+           },
+         {
+           "type": "object",
+           "properties": {
+             "type": {
+               "type": "string"
+             },
+             "sdfRef": {
+               "$ref": "#/definitions/sdf-pointer"
+             },
+             "description": {
+               "type": "string"
+             },
+             "$comment": {
+               "type": "string"
+             },
+             "minimum": {
+               "type": "number"
+             },
+             "maximum": {
+               "type": "number"
+             },
+             "enum": {
+               "type": "array",
+               "minItems": 1
+             },
+             "format": {
+               "type": "string"
+             },
+             "minLength": {
+               "type": "number"
+             },
+             "maxLength": {
+               "type": "number"
+             }
+           },
+           "additionalProperties": {
+             }
+         }
+       ]
+     },
+     "description": {
+       "type": "string"
+     },
+     "label": {
+       "type": "string"
```

```
+      },
+      "$comment": {
+        "type": "string"
+      },
+      "sdfRef": {
+        "$ref": "#/definitions/sdf-pointer"
+      },
+      "sdfRequired": {
+        "$ref": "#/definitions/pointer-list"
+      },
+      "units": {
+        "type": "string"
+      },
+      "unit": {
+        "type": "string"
+      },
+      "scaleMinimum": {
+        "type": "number"
+      },
+      "scaleMaximum": {
+        "type": "number"
+      },
+      "observable": {
+        "type": "boolean"
+      },
+      "readable": {
+        "type": "boolean"
+      },
+      "writable": {
+        "type": "boolean"
+      },
+      "nullable": {
+        "type": "boolean"
+      },
+      "subtype": {
+        "anyOf": [
+          {
+            "type": "string",
+            "const": "byte-string"
+          },
+          {
+            "type": "string",
+            "const": "unix-time"
+          },
+          {
+            "type": "string"
+          }
+        ]
+      }
+    ]
  }
```

```
+         },
+         "sdfType": {
+           "anyOf": [
+             {
+               "type": "string",
+               "const": "byte-string"
+             },
+             {
+               "type": "string",
+               "const": "unix-time"
+             },
+             {
+               "type": "string"
+             }
+           ]
+         },
+         "contentFormat": {
+           "type": "string"
+         }
+       },
+       "additionalProperties": {
+     }
  ]
},
"allowed-types": {
  "anyOf": [
    {
      "type": "number"
    },
    {
      "type": "string"
    },
    {
      "type": "boolean"
    },
    {
      "type": "null"
    },
    {
      "type": "array",
      "items": {
        "type": "number"
      }
    },
    {
      "type": "array",
      "items": {

```

```
        "type": "string"
      }
    },
    {
      "type": "array",
      "items": {
        "type": "boolean"
      }
    },
    {
      "type": "object",
      "additionalProperties": {
+     },
+     {
      }
    ]
  },
  "actionqualities": {
    "type": "object",
    "properties": {
      "description": {
        "type": "string"
      },
      "label": {
        "type": "string"
      },
      "$comment": {
        "type": "string"
      },
      "sdfRef": {
        "$ref": "#/definitions/sdf-pointer"
      },
      "sdfRequired": {
        "$ref": "#/definitions/pointer-list"
      },
      "sdfInputData": {
        "$ref": "#/definitions/parameter-list"
      },
+     "sdfRequiredInputData": {
+       "$ref": "#/definitions/pointer-list"
+     },
      "sdfOutputData": {
        "$ref": "#/definitions/parameter-list"
      },
      "sdfData": {
        "type": "object",
        "additionalProperties": {
```

```
        "$ref": "#/definitions/dataqualities"
      }
    },
-   "additionalProperties": false
+   "additionalProperties": {
+     }
  },
  "parameter-list": {
-   "$ref": "#/definitions/dataqualities"
+   "anyOf": [
+     {
+       "$ref": "#/definitions/pointer-list"
+     },
+     {
+       "$ref": "#/definitions/dataqualities"
+     }
+   ]
  },
  "eventqualities": {
    "type": "object",
    "properties": {
      "description": {
        "type": "string"
      },
      "label": {
        "type": "string"
      },
      "$comment": {
        "type": "string"
      },
      "sdfRef": {
        "$ref": "#/definitions/sdf-pointer"
      },
      "sdfRequired": {
        "$ref": "#/definitions/pointer-list"
      },
      "sdfOutputData": {
        "$ref": "#/definitions/parameter-list"
      },
      "sdfData": {
        "type": "object",
        "additionalProperties": {
          "$ref": "#/definitions/dataqualities"
        }
      }
    },
-   "additionalProperties": false
```

```
+     "additionalProperties": {  
+     }  
    },  
    "productqualities": {  
      "$ref": "#/definitions/thingqualities"  
    }  
  }  
}
```

Acknowledgements

This draft is based on "sdf.md" and "sdf-schema.json" in the old one-data-model "language" repository, as well as Ari Keränen's "alt-schema" from the Ericsson Research "ipso-odm" repository (which is now under subdirectory "sdflint" in the one-data model "tools" repository).

Contributors

Ari Keränen
Ericsson
FI-02420 Jorvas
Finland

Email: ari.keranen@ericsson.com

Wouter van der Beek
Cascoda Ltd.
Threefield House
Threefield Lane
Southampton
United Kingdom

Email: w.vanderbeek@cascoda.com

Authors' Addresses

Michael Koster (editor)
Dogtiger Labs
524 H Street
Antioch, CA, 94509
United States of America

Phone: +1-707-502-5136
Email: michaeljohnkoster@gmail.com

Carsten Bormann (editor)
Universität Bremen TZI
Postfach 330440
D-28359 Bremen
Germany

Phone: +49-421-218-63921
Email: cabo@tzi.org