Analysis of Propagation of Regular, Extended, and Large Communities

Lilia Hannachi and Kotikalapudi Sriram lilia.hannchi@nist.gov ksriram@nist.gov

GROW WG Meeting
IETF 111
July 2021

Acknowledgements: The authors wish to thank Doug Montgomery, Oliver Borchert, Alexander Azimov, Jeff Haas, Jakob Heitz, Gyan Mishra, and Brian Dickson for comments/suggestions.

Abbreviations

RC = Regular Community

EC = Extended Community

LC = Large Community

Motivation for this Study

- There are applications in IETF drafts for which LC/EC transitivity is much needed (at least over a few hops), e.g., https://datatracker.ietf.org/doc/html/draft-ietf-grow-route-leak-detection-mitigation
- Can they get the transitivity of LC/EC that they need?
- There was an extensive discussion on the IDR/GROW WG lists about the propagation behaviors of LC/EC
 - https://mailarchive.ietf.org/arch/browse/grow/?gbt=1&index=152EJ38H Svfapwg4F0SqFii69RM
- This study focuses on measuring the propagation of EC and EC

Prior Work on Regular Communities

Florian Streibelt, Franziska Lichtblau, Robert Beverly, Anja Feldmann, Cristel Pelsser, Georgios Smaragdakis, and Randy Bush, "BGP Communities: Even more Worms in the Routing Can," Proceedings of IMC '18. ACM, New York, NY, USA.

https://dl.acm.org/doi/10.1145/3278532.3278557

Vasileios Giotsas, Georgios Smaragdakis, Christoph Dietzel, Philipp Richter, Anja Feldmann, and Arthur Berger, "Inferring BGP Blackholing Activity in the Internet," Proceedings of ACM Internet Measurements Conference, London, UK, November 2017 (IMC'17). https://dl.acm.org/doi/pdf/10.1145/3131365.3131379

Some Basics about the Measurement Methodology

- Using Routeviews and RIPE-RIS data
- Considering only unique {prefix, AS path, RC/LC/EC} combinations
- Conservative in the way # AS hops for propagation of RC/LC/EC is measured:
 - Example: AS Path: 202365 39533 3491 3356 21277 212573 208293 56484 205169, RC: 3491:3000
 - ➤ Assume RC 3491:3000 was added by AS 3941 but it may have been added by an earlier AS in the path
 - The UPDATE could have propagated father than this AS Path and the collectors may not have gathered that data because of where the collectors' peers are
 - ➤ When the RC/LC/EC community ID (AS number) is not found in the associated AS path, the above measurement is skipped
- So, the estimates of RC/LC/EC propagation (#hops) are low estimates

Examples of UPDATES with RC and LC

• [TIME: 06/08/21 02:00:25, TYPE: TABLE DUMP V2/IPV4 UNICAST, PREFIX: 185.227.239.0/24, SEQUENCE: 654281, FROM: 194.50.19.4 AS202365, ORIGINATED: 06/03/21 08:49:23, ORIGIN: IGP, ASPATH: 202365 39533 3491 3356 21277 212573 208293 56484 205169, NEXT HOP: 194.50.19.4, COMMUNITY: 0:39533 3491:3000 3491:3011 3491:9002 39533:49666, LARGE COMMUNITY: 3356:1:41 202365:2020:202409]

3356 is Level 3; 3491 is PCCW Global

[TIME: 06/08/21 02:00:24, TYPE: TABLE DUMP V2/IPV4 UNICAST, PREFIX: 185.104.158.0/24, SEQUENCE: 638182, FROM: 208.94.118.10 AS40630, ORIGINATED: 06/05/21 00:04:44, ORIGIN: IGP, ASPATH: 40630 2914 3356 21277 212573 208293 56484 200485, NEXT HOP: 208.94.118.10, COMMUNITY: 2914:420 2914:1004 2914:2000 2914:3000 40630:100 40630:11701, LARGE COMMUNITY: 3356:1:41]

3356 is Level 3; 2914 is NTT

Finding 2-Octet and 4-Octet AS in the Extended Community

Transitive Two-Octet AS-Specific Extended Community (Sub-Types are defined in the "Transitive Two-octet AS-Specific Extended Community Sub-Types" registry)	[<u>RFC7153</u>]
Transitive Four-Octet AS-Specific Extended Community (Sub-Types are defined in the "Transitive Four-octet AS-Specific Extended Community Sub-Types" registry)	[<u>RFC7153</u>]
Non-Transitive Two-Octet AS-Specific Extended Community (Sub-Types are defined in the "Non-Transitive Two-octet AS-Specific Extended Community Sub-Types" registry)	[<u>RFC7153</u>]
Non-Transitive Four-Octet AS-Specific Extended Community (Sub-Types are defined in the "Non-Transitive Four-octet AS-Specific Extended Community Sub-Types" registry)	[<u>RFC7153</u>]
	Two-octet AS-Specific Extended Community Sub-Types" registry) Transitive Four-Octet AS-Specific Extended Community (Sub-Types are defined in the "Transitive Four-octet AS-Specific Extended Community Sub-Types" registry) Non-Transitive Two-Octet AS-Specific Extended Community (Sub-Types are defined in the "Non-Transitive Two-octet AS-Specific Extended Community Sub-Types" registry) Non-Transitive Four-Octet AS-Specific Extended Community (Sub-Types are defined in

Location of the 2-octet AS number for EC Types 0x00 and 0x40

Location of the 4-octet AS number for EC Types 0x02 and 0x42

Example of an UPDATE with EC

[TIME: 07/15/21 01:30:00, TYPE: BGP4MP/MESSAGE/Update, FROM: 2001:7f8:13::a520:5206:1 AS205206, TO: 2001:7f8:13::a501:2654:1 AS12654, ORIGIN: IGP, ASPATH: 205206 33891 59947 212705, UNKNOWN_ATTR(192, 16, 8): 00 03 ea 2b 00 00 ea 2b, MP_REACH_NLRI(IPv6 Unicast), NEXT_HOP: 2001:7f8:13::a520:5206:1, NEXT_HOP: fe80::8a90:900:772:7446, COMMUNITY: 33891:33893 33891:33897 33891:40001 59947:400 59947:59947, ANNOUNCE, 2602:feda:b70::/48]

EC = UNKNOWN_ATTR(192, 16, 8): 00 03 ea 2b 00 00 ea 2b Global Administrator ID = ea 2b = ASN 59947

ASPATH: 205206 33891 59947 212705
The EC has propagated at least two hops

Some Notes about Regular Communities

Community name	Hex	ASN:X notation		
Internet	0x0000000	0:0		
BLACKHOLE	0xFFFF029A	65535:666		
NO_EXPORT	0xFFFFFF01	65535:65281		
NO_ADVERTISE	0xFFFFFF02	65535:65282		Not seen in the
NO_EXPORT_SUBCONFED	0xFFFFFF03	65535:65283		measurements
NOPEER	0xFFFFFF04	65535:65284	J	
	0x00010000 to		7	Did not look
Wide range for private use	OxFFFEFFF	1:0 to 65534:65535		exhaustively for these

- Zero or 65535 in the first 2 octets does not mean it is an AS number; it is a WKC
- 0:0 is a WKC called "Internet" and the Update should propagate Internet-wide
- Blackhole Community may be encoded in two ways: Example 2914:666 (using the administrator's AS number) or 65535:666 (using the WKC)

Blackhole Community: AS Distance and Propagation

- AS Distance is the distance in # hops the Blackholed prefix (client) is from the RTBH provider
- AS distance 0 means that the prefix is originated from the same ISP/IXP that is the RTBH provider
- Example: AS path = 25160 3356 12956 6147 and RC = 3356:666
 - ➤ This means that the client is at AS 6147 (origin AS) and AS 3356 is the RTBH provider
 - AS Distance to RTBH provider = 2
 - Propagation (#hops): The Blackhole Community propagated 3 hops in this case (AS 6147 to AS 25160)

Blackhole Community Contributes Differently to RC Transitivity Counts for ASes

- For a Blackhole Community, the propagation happens across the whole AS path
 - \triangleright Example: AS path = 25160 3356 12956 6147 and RC = 3356:666
 - The RC propagation count for each of the ASes shown in the path increments by 1 except the left-most (i.e., AS 25160)
 - The Community ID (C-ID) value in the RC may be 65535 (WKC for BLACKHOLE)
- When it is some other Community type, we compare the ASN in the C-ID with ASNs in the path
 - \triangleright Example: AS path = 207910 204092 30781 3356 20940 and RC = 3356:903
 - The RC counts for only ASes 204092 30781 3356 increment by 1

Note: The second bullet also applies to LC/EC Transitivity Counts for ASes


Propagation Analysis Using the RIPE-RIS UPDATE Data

Collector: rrc03 From 2021-07-15 00:00 To 2021-07-15 23:55 (one whole day)


Total # Updates (raw)	52,765,351
# Unique {Prefix, Path, RC}	69,643,850
# Unique {Prefix, Path, LC}	12,802,541
# Unique {Prefix, Path, EC}	1,143,809
# Unique {Prefix, Path, Transitive EC}	925,082
# Unique {Prefix, Path, Transitive 2-Octet AS EC}	826,575
# Unique {Prefix, Path, Transitive 4-Octet AS EC}	98,507
# Unique {Prefix, Path, RC = Any:666}	264,557
# Unique {Prefix, Path, RC = 65535:666}	21
# Unique {Prefix, Path, RC = 0:Any}	10,293,308
# Unique {Prefix, Path, RC = Any:65535}	195,462
# Unique {Prefix, Path, RC = 0:0}	18,583
# routes that have LC with Global ID = 0	12

Propagation of Large Communities

Large Commun. Propagation (low estimate)

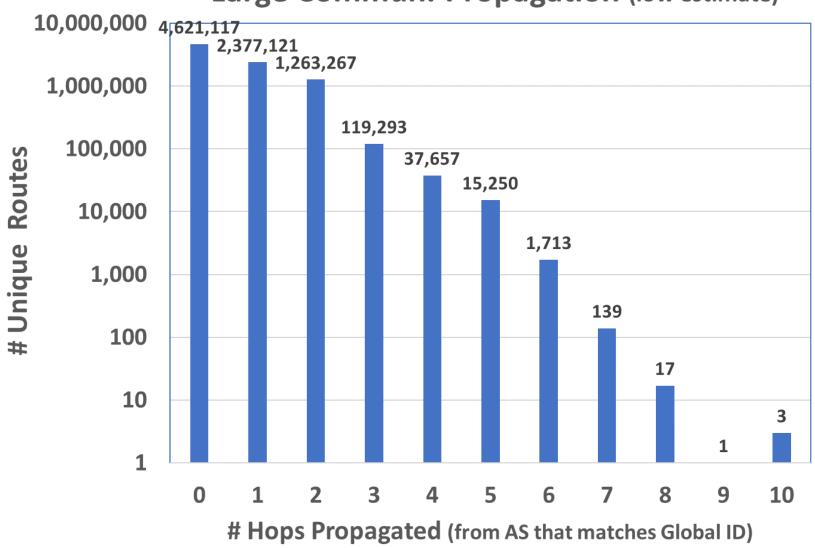


Propagation of Extended Communities

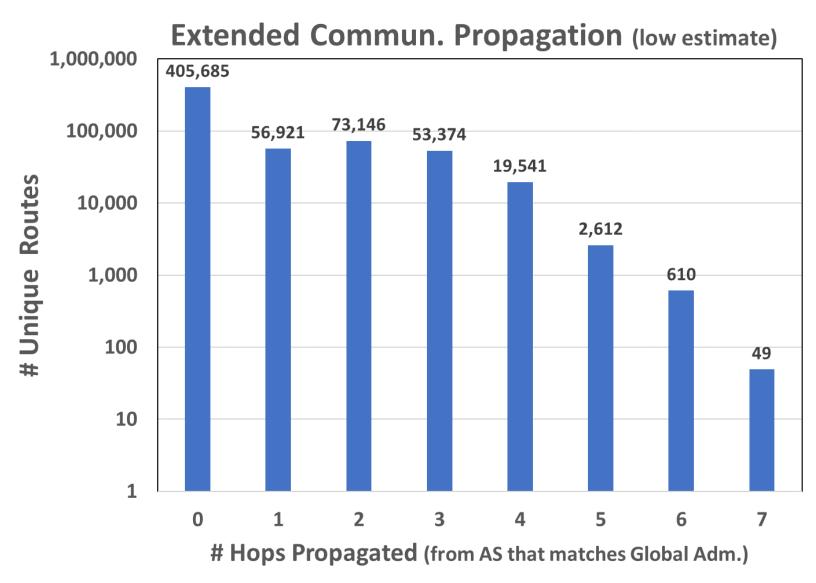

- A few peers of the collector send large numbers of routes with EC that propagated zero hops. The same is true for RC and LC also.
- E.g., the 405,685 routes at 0 hops are all from one AS

Extended Community Frequency by Type

EC distribution by Type

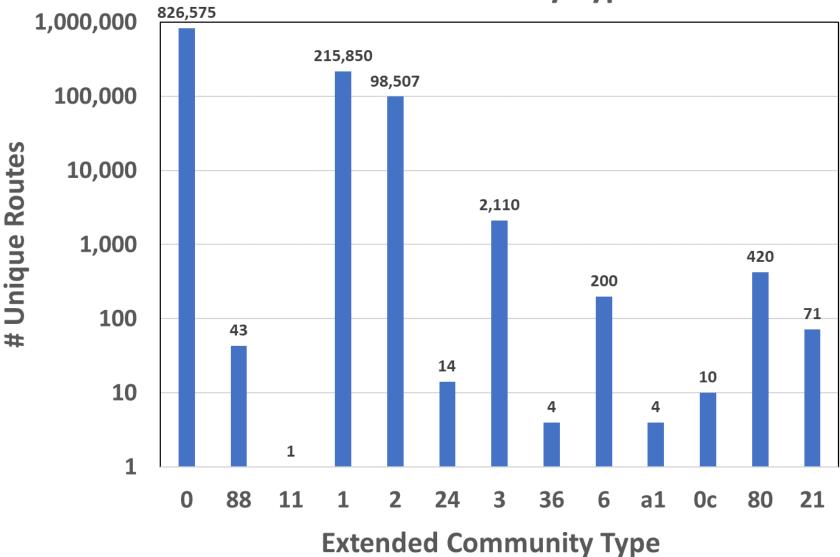

- Only the Transitive ECs are seen propagating on the Internet.
- Operators seem restrained about not propagating non-transitive ECs.


Count of ASes that Propagate RC, LC, EC

# ASes that Propagate RC	3,298	
# ASes that Propagate LC	262	
# ASes that Propagate EC	527	
# ASes that Propagate RC, LC, or EC	3,872	
Percentage of Transit ASes that Propagate RC, LC, or EC	32%	
# Tier 1 / Major ISPs that Propagate RC	22	out of 25
# Tier 1 / Major ISPs that Propagate LC	3	*
# Tier 1 / Major ISPs that Propagate EC	2	*
# Tier 1 / Major ISPs that Propagate RC, LC, or EC	22	out of 25


^{*} Hit or miss depending on the date of the data collection

Propagation of Regular Communities



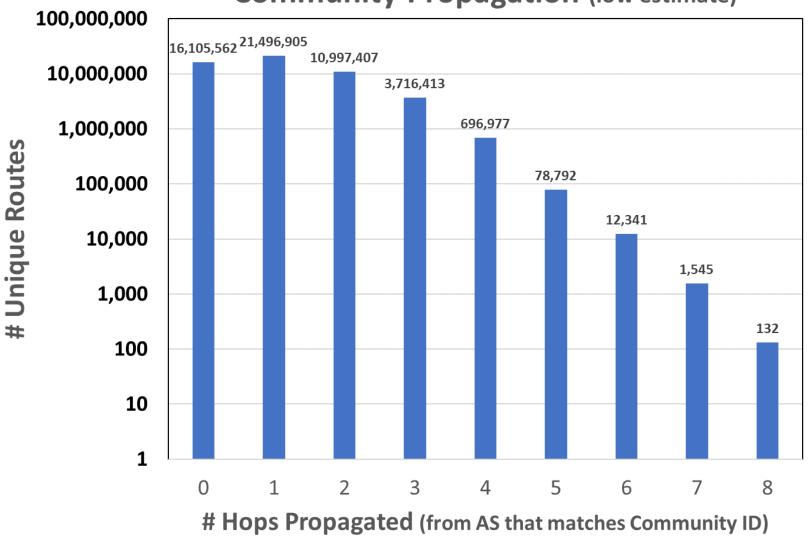

Blackhole Communities - ASN:666

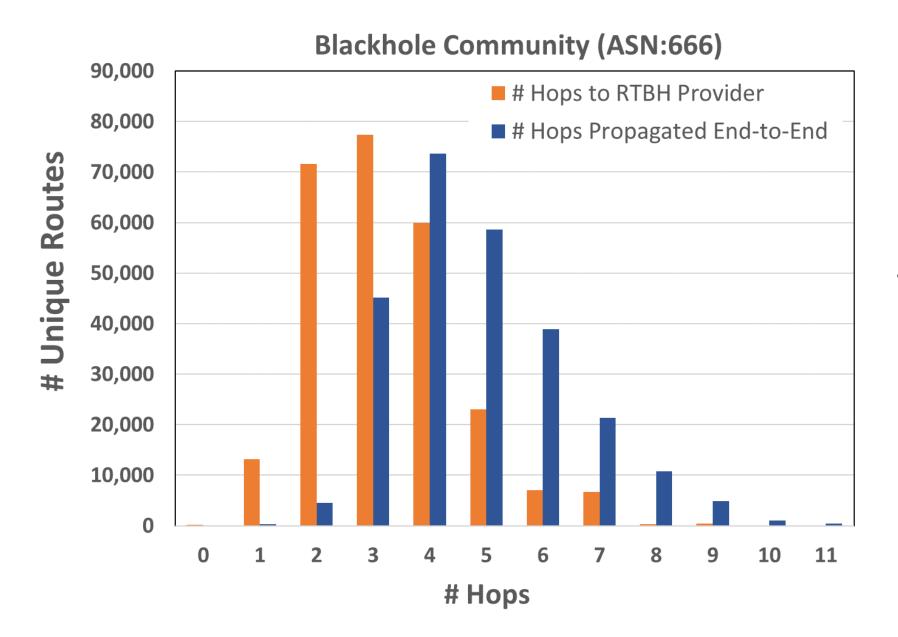

Includes 65535:666 (WKC)

Conclusions, Questions, and Future Work

- The analyses show evidence that LC and EC propagate multiple hops (in addition to RC).
- Considering this, what are WG thoughts on support for use of LC/EC in applications (drafts) where transitivity is needed?
- Would the WG make any new recommendations for the operators concerning handling of LC/EC?
- Future work: We (authors) are open to suggestions for additional data analysis.

Backup slides


Propagation Analysis Using the Routeviews RIB Data

Collector: RouteViews3 From 2021-07-15 00:00 To 2021-07-15 00:00)

Total # Updates (raw)	35,590,333
# Unique {Prefix, Path, RC}	128,706,731
# Unique {Prefix, Path, LC}	12,677,829
# Unique {Prefix, Path, RC = Any:666}	1,868,810
# Unique {Prefix, Path, RC = 65535:666}	223
# Unique {Prefix, Path, RC = 0:Any}	10,025,210
# Unique {Prefix, Path, RC = Any:65535}	41,287
# Unique {Prefix, Path, RC = 0:0}	25,482
# routes that have LC with Global ID = 0	14


Propagation of Regular Communities



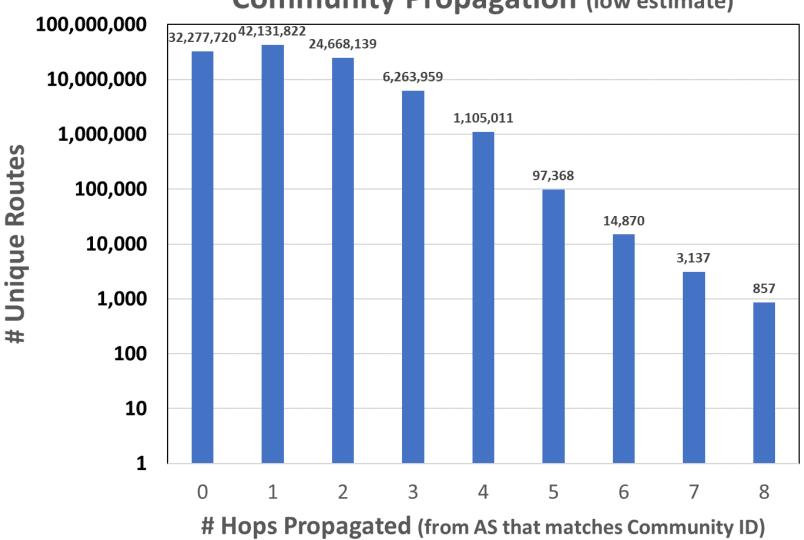

Propagation of Large Communities

Large Commun. Propagation (low estimate)

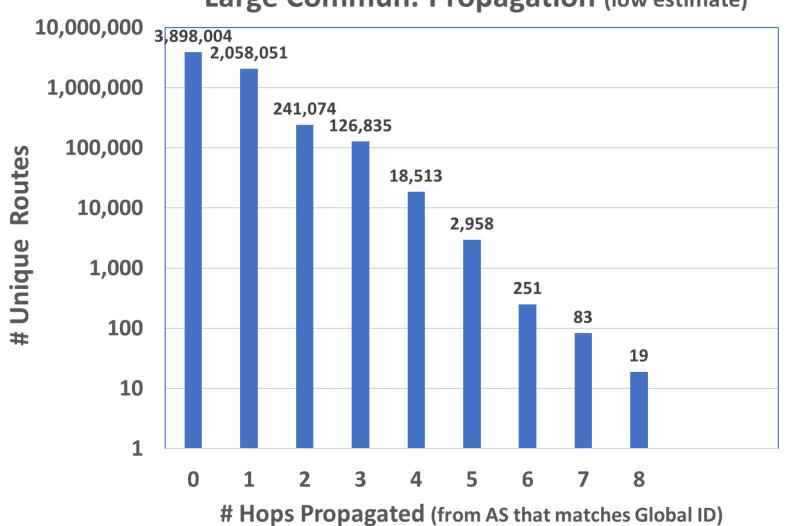


Count of ASes that Propagate RC, LC

# ASes that Propagate RC	3,443	
# ASes that Propagate LC	270	
# ASes that Propage RC or LC	3,661	
# Tier 1 / Major ISPs that Propagate RC	22	out of 25
# Tier 1 / Major ISPs that Propagate LC	2	*
# Tier-1 ASes that Propage RC or LC	22	out of 25

^{*} Hit or miss depending on the date of the data collection

Blackhole Communities - ASN:666

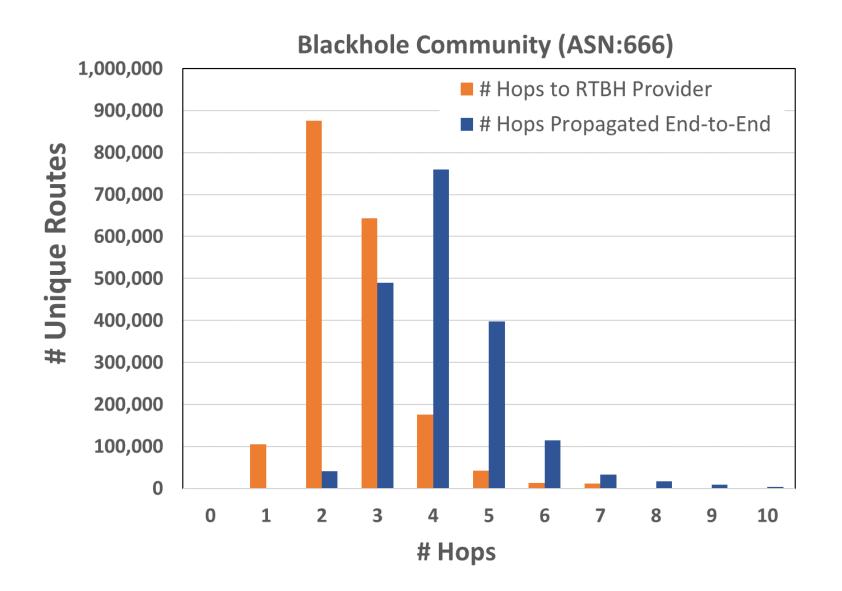

Includes 65535:666 (WKC)