

Publish-Subscribe Profile for Authentication and Authorization for Constrained Environments (ACE)

draft-ietf-ace-pubsub-profile-09

Francesca Palombini, Ericsson
Cigdem Sengul, Brunel University
Marco Tiloca, RISE

IETF 119 Meeting – Brisbane – March 19th, 2024


Recap

› Application profile of ACE for pub-sub group communication

- Instance of the interfaces and message formats/exchanges in *draft-ietf-ace-key-groupcomm*
- Focus on CoAP , per *draft-ietf-core-coap-pubsub*; also possible to support MQTT

› Authorize pub-sub clients (ACE Clients) to:

- Publish and/or subscribe to a topic at a Broker (ACE RS)
 - › → Joining an application group (topic), with certain roles
- Obtain from a KDC (ACE RS) the keying material to use for a topic
 - › → Joining the security group associated with a topic

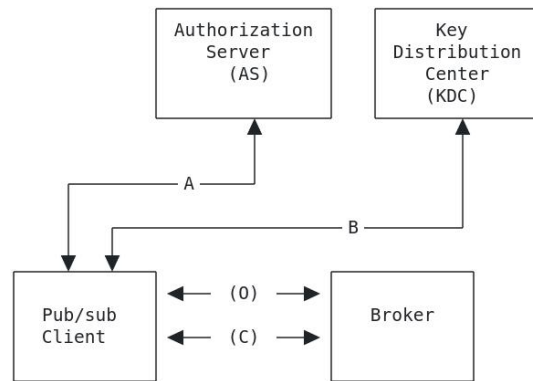

› Secure communication:

- Between client and Broker/KDC, using a transport profile of ACE (e.g., RFC9202 or RFC9203)
- Between publisher and subscribers, end-to-end protection of data, using COSE (RFC9052)

Updates in v -09 (1/2)

› Simple updates

- Editorial fixes and readability improvements
- Improved Section 1.1 “Terminology”

› Alignment with changes made in *draft-ietf-ace-key-groupcomm*

- Now using the parameter ‘exi’ in the Join Response from the KDC
- Used Problem Details (RFC 9290) instead of the custom format for error responses
- Updated formulation of requirements in Appendix A

› End-to-end data protection between publisher and subscribers

- Fixes in the steps for composing the COSE_Encrypt0 object

› When using the (D)TLS profile and uploading the Access Token through the Handshake

- Computation of the N_S challenge defined separately for (D)TLS 1.2 and 1.3

Updates in v -09 (2/2)

› Format of scope using AIF

- No substantial changes
- Improved naming in the AIF data model

› More general formulation of Toid and Tperm

- No effect on this particular profile
- It better sets the ground for future work on permissions for an Administrator client (e.g., a la *draft-ietf-oscore-gm-admin*)

```
AIF-PUBSUB-GROUPCOMM = AIF-Generic<pubsub-group, pubsub-perm>  
pubsub-group = tstr ; name of pub/sub topic or of  
                  ; the associated security group
```

```
pubsub-perm = uint .bits pubsub-perm-details
```

```
pubsub-perm-details = &(  
  Admin: 0,  
  AppGroup: 1  
  Publish: 2,  
  Read: 3,  
  Delete: 4  
)
```

```
scope_entry = [pubsub-group, pubsub-perm]
```

Figure 5: Pub/sub scope using the AIF format

Next steps

- › **Examples: avoid text strings as placeholders for to-be-registered integer abbreviations**
 - Instead, use what is proposed in *draft-bormann-cbor-e-ref*
- › **Content to add or improve in the next version -10**
 - Define the replay-checks at the subscribers
 - › Build on the approach used by OSCORE (RFC 8613) and using a Replay Window
 - Define canonical path of topic resources at the Broker
 - › More efficient workflow for a Client to retrieve topic metadata
 - Provide additional guidelines on the discovery of topic names
 - Specify default values for group policies, as per REQ20
 - Improve content and considerations on group rekeying
 - Extend the security considerations


Thank you!

Comments/questions?


<https://github.com/ace-wg/pubsub-profile>

Backup


Associations and workflow

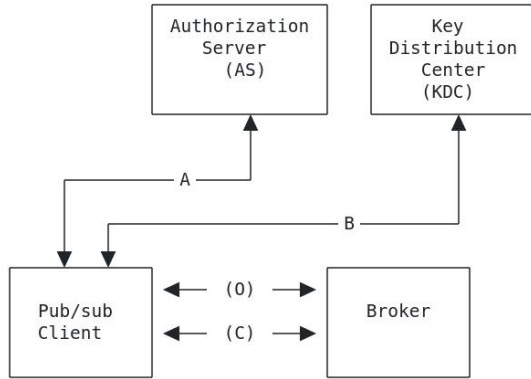

Architecture Overview

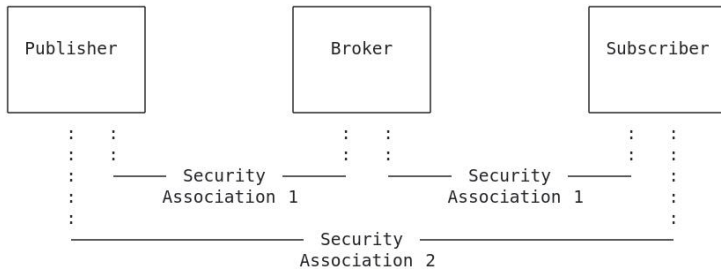

Security Associations between Publisher, Broker, and Subscriber

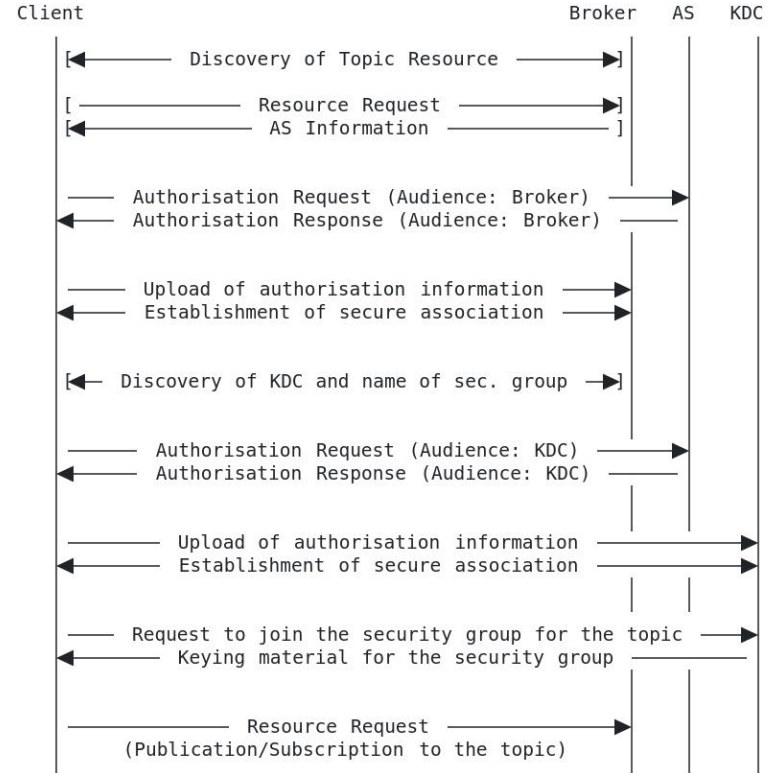

Authorization flow