

# NMDA drafts Intro

Introduction to:

YANG library -bis (draft-nmdsd-netconf-rfc7895bis-01)

NETCONF NMDA extensions (draft-dsd-netconf-00)

RESTCONF NMDA extensions (draft-dsd-netconf-restconf-nmda-00)

Rob Wilton (Cisco), on behalf of NMDA authors


[rwilton@cisco.com](mailto:rwilton@cisco.com)

IETF 99, Prague, Netconf WG

# 1 slide reminder of NMDA:

- Operator requirement for devices to clearly differentiate between:
  - What it is being **asked to do** – i.e. the **intended configuration**
  - What it is **actually doing** – i.e. **operational state, including the applied configuration.**
- Different solutions to this problem has been evaluated by IETF.
- The IETF solution defines a **new datastore for operational state**:
  - This has implications on the structure of YANG models to be simplified and optimized for use with NMDA.
  - Also replaces the existing ‘broken’ NETCONF GET operation.
  - NETCONF/RESTCONF additions to support the operational datastore.

# Canonical datastores picture:

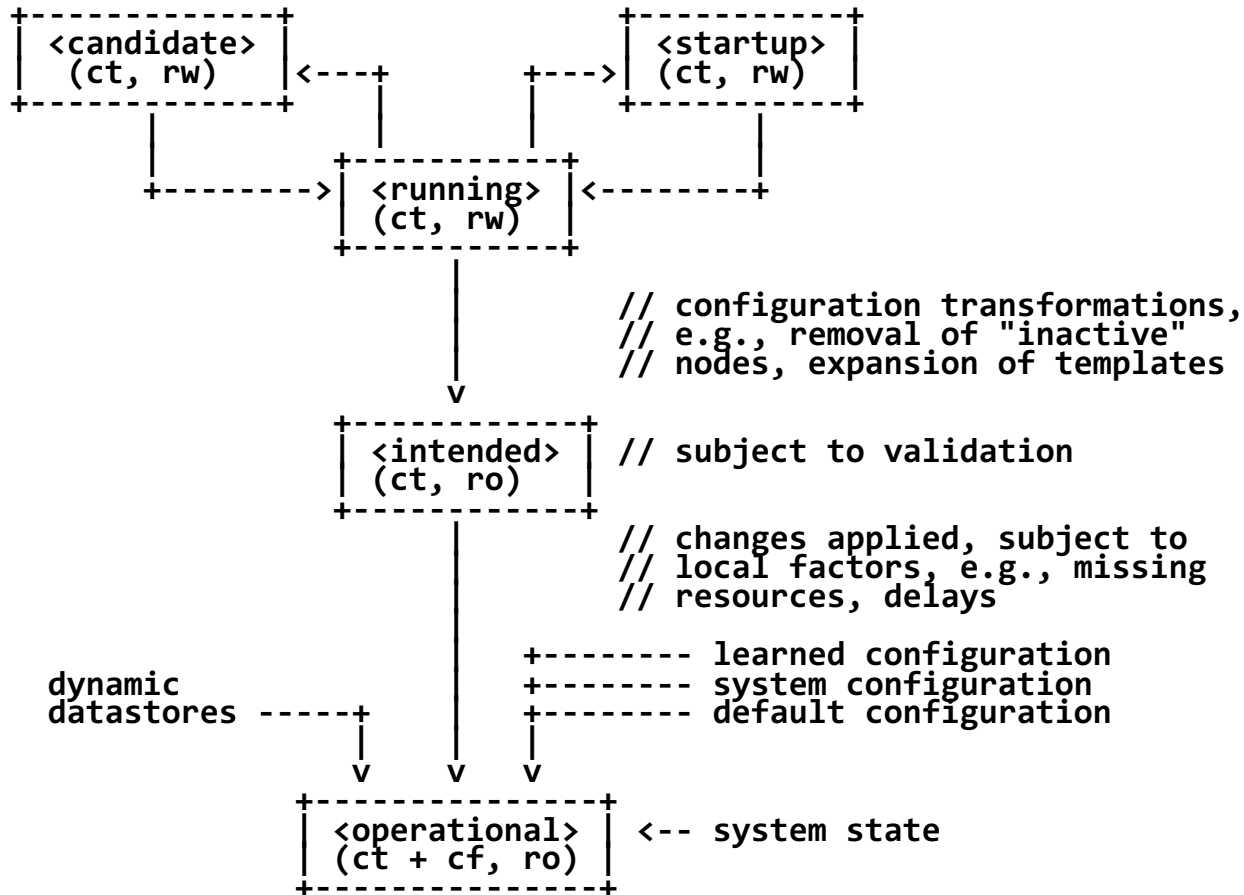

# NMDA impact on NETCONF WG

- The NETCONF protocol needs extensions to support NMDA
- The RESTCONF protocol needs extensions to support NMDA
- The scope of protocol extension drafts is limited to just adding the necessary support for NMDA.
- YANG library (common to both protocols) is also updated to provide information about which modules are available in which datastores.
- Details to follow in Kent and Phil's presentations ...