

CCAMP Working Group  
Internet-Draft  
Intended status: Informational  
Expires: January 13, 2022

J. Lopez de Vergara  
Naudit HPCN  
D. Perdices Burrero  
Universidad Autonoma de Madrid  
D. King  
Old Dog Consulting  
Y. Lee  
Samsung  
H. Zheng  
Huawei Technologies  
July 12, 2021

**A YANG Data Model for Flexi-Grid Optical Networks**  
**[draft-ietf-ccamp-flexigrid-yang-10](#)**

**Abstract**

This document defines a YANG module for managing flexi-grid optical networks. The model defined in this document specifies a flexi-grid traffic engineering database that is used to describe the topology of a flexi-grid network. It is based on and augments existing YANG models that describe network and traffic engineering topologies.

The YANG data model defined in this document conforms to the Network Management Datastore Architecture (NMDA).

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 13, 2022.

## Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1. Introduction</a>	<a href="#">2</a>
<a href="#">2. Terminology</a>	<a href="#">3</a>
<a href="#">3. Tree Diagram</a>	<a href="#">4</a>
<a href="#">3.1. Prefixes in Data Node Names</a>	<a href="#">4</a>
<a href="#">4. Example of Use</a>	<a href="#">4</a>
<a href="#">5. YANG Data Model for Flexi-Grid Topology</a>	<a href="#">5</a>
<a href="#">5.1. Flexi-Grid Topology Data Model Overview</a>	<a href="#">5</a>
<a href="#">5.2. Attributes Augmentation</a>	<a href="#">6</a>
<a href="#">5.3. Bandwidth Augmentation</a>	<a href="#">7</a>
<a href="#">5.4. Label Augmentation</a>	<a href="#">7</a>
<a href="#">6. YANG Model (Tree Structure) for Flexi-Grid Topology</a>	<a href="#">8</a>
<a href="#">7. The YANG Code for Flexi-grid topology</a>	<a href="#">25</a>
<a href="#">8. Security Considerations</a>	<a href="#">59</a>
<a href="#">9. IANA Considerations</a>	<a href="#">60</a>
<a href="#">10. Contributors</a>	<a href="#">61</a>
<a href="#">11. Acknowledgments</a>	<a href="#">61</a>
<a href="#">12. References</a>	<a href="#">62</a>
<a href="#">12.1. Normative References</a>	<a href="#">62</a>
<a href="#">12.2. Informative References</a>	<a href="#">63</a>
<a href="#">Authors' Addresses</a>	<a href="#">64</a>

## [1. Introduction](#)

The flexible grid (flexi-grid) optical network technology defined by the International Telecommunication Union Telecommunication Standardization Sector (ITU-T) and documented in Recommendation G.694.1 [[G.694.1](#)] and G.872 [[G.872](#)] provides an enhanced Dense Wavelength Division Multiplexing (DWDM) grid by defining a set of nominal central frequencies, slot widths, and the concept of the "frequency slot". This technology increases both transport network



scalability and flexibility, allowing the optimization of bandwidth usage.

[RFC7698] provides a framework for GMPLS-Based control of flexi-grid DWDM networks while [RFC7699] defines generalized labels for the use of GMPLS in flexi-grid networks.

This document presents a YANG data model [RFC7950] for flexi-grid objects in the dynamic optical network, including nodes, transponders and links, as well as how such links interconnect nodes.

This document identifies the flexi-grid components, parameters and their values, characterizes the features and the performances of the flexi-grid elements. For this, it augments [RFC8795], and imports the generic Layer 0 types and use of "media-channel" defined in [I-D.ietf-ccamp-layer0-types].

An application example in [Section 4](#) is also provided to better understand the utility of this YANG model.

A partner document defines a second YANG module that described flexi-grid tunnels, i.e., the paths from source to destination through a number of intermediate nodes  
[I-D.ietf-ccamp-flexigrid-media-channel-yang].

Impairment-aware traffic engineering topology is described in [I-D.ietf-ccamp-optical-impairment-topology-yang].

The YANG data model defined in this document conforms to the Network Management Datastore Architecture (NMDA) [RFC8342].

## 2. Terminology

Refer to [RFC7698] and [RFC7699] for the key terms used in this document.

The following terms are defined in [RFC7950] and are not redefined here:

- o client
- o server
- o augment
- o data model
- o data node



The following terms are defined in [[RFC6241](#)] and are not redefined here:

- o configuration data
- o state data

The terminology for describing YANG data models is found in [[RFC7950](#)].

### **[3.](#) Tree Diagram**

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is defined in [[RFC8340](#)].

#### **[3.1.](#) Prefixes in Data Node Names**

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, as shown in Figure 1. It uses prefixes from [[I-D.ietf-ccamp-layer0-types](#)], [[RFC8345](#)], and [[RFC8795](#)].

Prefix	YANG module	Reference
l0-types	ietf-layer0-types	[RFCXXXX]
flexgt	ietf-flexi-grid-topology	[RFCYYYY]
nw	ietf-network	[ <a href="#">RFC8345</a> ]
nt	ietf-network-topology	[ <a href="#">RFC8345</a> ]
tet	ietf-te-topology	[ <a href="#">RFC8795</a> ]

Figure 1: Prefixes and Corresponding YANG modules

RFC Editor Note: Please replace XXXX with the RFC numbers assigned to [[I-D.ietf-ccamp-layer0-types](#)]. Please replace YYYY with the RFC number assigned to this document. Please remove this note.

### **[4.](#) Example of Use**

In order to explain how this model is used, we provide the following example. An optical network usually has multiple transponders, switches (nodes) and links. Figure 1 shows a simple topology.



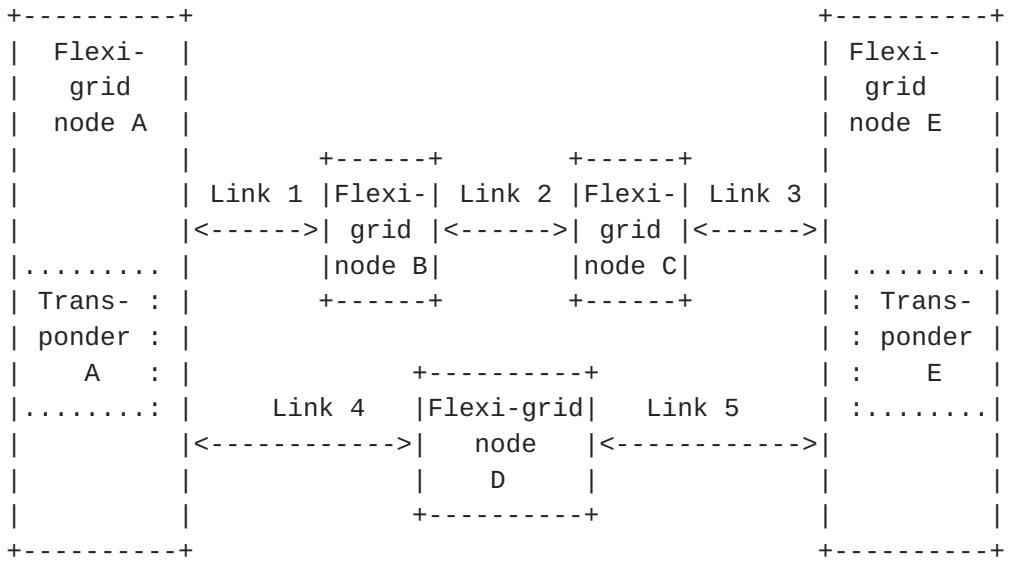


Figure 2: Topology Example

In order to configure a network media channel to interconnect transponders A and E, first of all we have to populate the flexi-grid topology YANG model with all elements in the network:

- o We define the transponders within nodes A and E as tunnel termination points (TTPs) and provide their internal local link connectivity towards the node interfaces. We also provide nodes A and B identifiers, addresses and interfaces.
- o We do the same for the nodes B, C and D, providing their identifiers, addresses and interfaces, as well as the internal connectivity matrix between interfaces.
- o Then, we also define the links 1 to 5 that interconnect nodes, indicating which flexi-grid labels are available.
- o Other information, such as the slot frequency and granularity are also provided.

## **5. YANG Data Model for Flexi-Grid Topology**

### **5.1. Flexi-Grid Topology Data Model Overview**

This document aims to describe the data model for Flexi-Grid topology. As a classic Traffic-engineering (TE) technology, Flexi-Grid provide WDM switching in transport network. Therefore the YANG



module presented in this document augments from a more generic Traffic Engineered (TE) network topology data model, i.e., the `ietf-te-topology`, as specified in [[RFC8795](#)], following the guidelines provided in [section 6 of \[RFC8795\]](#).

Common types, identities and groupings defined in [[I-D.ietf-ccamp-layer0-types](#)] are reused in this document.

The figure below shows the augmentation relationship between YANG models.

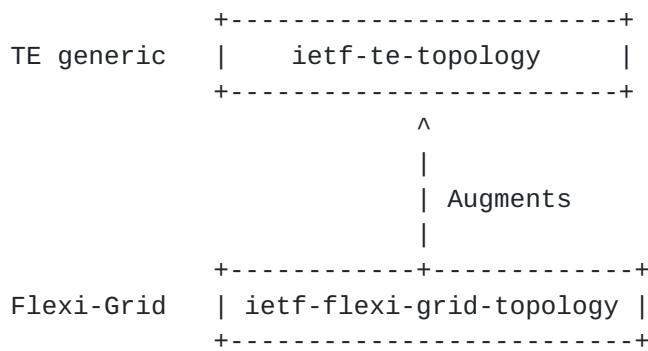


Figure 3: Relationship between Flexi-Grid and TE topology models

The entities and TE attributes, such as node, termination points and links, are still applicable for describing an Flexi-Grid topology and the model presented in this document only specifies with technology-specific attributes/information.

The Flexi-Grid specific attributes in [[RFC7699](#)], including the grid type, channel spacing, slot width granularity, n and m parameters, can be used to represent the label information. These attributes have been specified in [[I-D.ietf-ccamp-layer0-types](#)], and used in this document for augmentation of the generic TE topology model.

The YANG module `ietf-flexi-grid-topology` defined in this document conforms to the Network Management Datastore Architecture (NMDA) defined in [[RFC8342](#)].

## [5.2. Attributes Augmentation](#)

There are a few characteristics augmenting to the generic TE topology.



Following the guidelines in [[RFC8795](#)], a flexi-grid-topology network-type is specified as the indicator of Flexi-Grid in the topology as follows.

```
augment /nw:networks/nw:network/nw:network-types/tet:te-topology:  
  +-rw flexi-grid-topology!
```

Figure 4: Flexi-Grid Topology Augmentation

A flexi-grid-node presence container is specified, augmenting the generic TE node attributes, to indicate that the TE node is a Flexi-Grid node

```
augment /nw:networks/nw:network/nw:node/tet:te  
  /tet:te-node-attributes:  
    +-rw flexi-grid-node!
```

Figure 5: Flexi-Grid Node Augmentation

It is assumed that all the Flexi-Grid nodes are reconfigurable.

### [5.3. Bandwidth Augmentation](#)

As described in [Section 4.2 of \[RFC7699\]](#), there is some overlap between bandwidth and label in layer0.

The flexi-grid label resource information described in [section 5.4](#), is sufficient to describe also the spectrum resources within a flexi-grid network. Therefore, the model does not define any augmentation for the te-bandwidth containers defined in [[RFC8795](#)].

### [5.4. Label Augmentation](#)

The model augments all the occurrences of the label-restriction list with flexi-grid technology specific attributes using the flexi-grid-label-range-info grouping defined in [[I-D.ietf-ccamp-layer0-types](#)].

The Flexi-Grid label resource information described in [section 5.4](#), is sufficient to describe also the spectrum resources within a flexi-Grid network. Therefore, the YANG model does not define any



augmentation for the te-bandwidth containers defined in [[I-D.ietf-ccamp-layer0-types](#)].

Moreover, following the guidelines in [[RFC8795](#)], the model augments all the occurrences of the te-label container with the flexi-Grid technology specific attributes using the flexi-grid-label-start-end, flexi-grid-label-hop and flexi-grid-label-step groupings defined in [[I-D.ietf-ccamp-layer0-types](#)].

## 6. YANG Model (Tree Structure) for Flexi-Grid Topology

```
module: ietf-flexi-grid-topology
augment /nw:networks/nw:network/nw:network-types/tet:te-topology:
  +-rw flexi-grid-topology!
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes:
    +-rw flexi-grid-node!
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:label-restrictions/tet:label-restriction:
    +-rw grid-type?    identityref
    +-rw priority?     uint8
    +-rw flexi-grid
      +-rw slot-width-granularity?  identityref
      +-rw min-slot-width-factor?   uint16
      +-rw max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction:
    +-rw grid-type?    identityref
    +-rw priority?     uint8
    +-rw flexi-grid
      +-rw slot-width-granularity?  identityref
      +-rw min-slot-width-factor?   uint16
      +-rw max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction:
    +-rw grid-type?    identityref
    +-rw priority?     uint8
    +-rw flexi-grid
      +-rw slot-width-granularity?  identityref
      +-rw min-slot-width-factor?   uint16
      +-rw max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
```



```
    /tet:information-source-entry/tet:connectivity-matrices
      /tet:label-restrictions/tet:label-restriction:
        +-+ro grid-type?    identityref
        +-+ro priority?     uint8
        +-+ro flexi-grid
          +-+ro slot-width-granularity?  identityref
          +-+ro min-slot-width-factor?   uint16
          +-+ro max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:from/tet:label-restrictions
      /tet:label-restriction:
        +-+ro grid-type?    identityref
        +-+ro priority?     uint8
        +-+ro flexi-grid
          +-+ro slot-width-granularity?  identityref
          +-+ro min-slot-width-factor?   uint16
          +-+ro max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:to/tet:label-restrictions
      /tet:label-restriction:
        +-+ro grid-type?    identityref
        +-+ro priority?     uint8
        +-+ro flexi-grid
          +-+ro slot-width-granularity?  identityref
          +-+ro min-slot-width-factor?   uint16
          +-+ro max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
    /tet:local-link-connectivities/tet:label-restrictions
      /tet:label-restriction:
        +-+rw grid-type?    identityref
        +-+rw priority?     uint8
        +-+rw flexi-grid
          +-+rw slot-width-granularity?  identityref
          +-+rw min-slot-width-factor?   uint16
          +-+rw max-slot-width-factor?   uint16
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
    /tet:local-link-connectivities
      /tet:local-link-connectivity/tet:label-restrictions
        /tet:label-restriction:
          +-+rw grid-type?    identityref
          +-+rw priority?     uint8
          +-+rw flexi-grid
            +-+rw slot-width-granularity?  identityref
            +-+rw min-slot-width-factor?   uint16
```



```
    +-rw max-slot-width-factor?    uint16
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:label-restrictions
        /tet:label-restriction:
    +-rw grid-type?    identityref
    +-rw priority?    uint8
    +-rw flexi-grid
        +-rw slot-width-granularity?    identityref
        +-rw min-slot-width-factor?    uint16
        +-rw max-slot-width-factor?    uint16
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:information-source-entry/tet:label-restrictions
        /tet:label-restriction:
    +-ro grid-type?    identityref
    +-ro priority?    uint8
    +-ro flexi-grid
        +-ro slot-width-granularity?    identityref
        +-ro min-slot-width-factor?    uint16
        +-ro max-slot-width-factor?    uint16
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
        /tet:label-restriction:
    +-rw grid-type?    identityref
    +-rw priority?    uint8
    +-rw flexi-grid
        +-rw slot-width-granularity?    identityref
        +-rw min-slot-width-factor?    uint16
        +-rw max-slot-width-factor?    uint16
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
        /tet:label-restrictions/tet:label-restriction
            /tet:label-start/tet:te-label/tet:technology:
    +-:(flexi-grid)
        +-rw flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
        /tet:label-restrictions/tet:label-restriction
            /tet:label-end/tet:te-label/tet:technology:
    +-:(flexi-grid)
        +-rw flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
        /tet:label-restrictions/tet:label-restriction
            /tet:label-step/tet:technology:
    +-:(flexi-grid)
        +-rw flexi-grid-channel-spacing?    identityref
        +-rw flexi-n-step?    uint8
augment /nw:networks/nw:network/nw:node/tet:te
```



```
/tet:te-node-attributes/tet:connectivity-matrices
/tet:underlay/tet:primary-path/tet:path-element/tet:type
/tet:label/tet:label-hop/tet:te-label/tet:technology:

+--:(flexi-grid)
  +--rw (single-or-super-channel)?
    +--:(single)
      |  +--rw flexi-n?          10-types:flexi-n
      |  +--rw flexi-m?          10-types:flexi-m
    +--:(super)
      +--rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:underlay/tet:backup-path/tet:path-element/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:

+--:(flexi-grid)
  +--rw (single-or-super-channel)?
    +--:(single)
      |  +--rw flexi-n?          10-types:flexi-n
      |  +--rw flexi-m?          10-types:flexi-m
    +--:(super)
      +--rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:

+--:(flexi-grid)
  +--rw (single-or-super-channel)?
    +--:(single)
      |  +--rw flexi-n?          10-types:flexi-n
      |  +--rw flexi-m?          10-types:flexi-m
    +--:(super)
      +--rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
```



```
+--:(flexi-grid)
  +-rw (single-or-super-channel)?
    +--:(single)
      |  +-rw flexi-n?          10-types:flexi-n
      |  +-rw flexi-m?          10-types:flexi-m
    +--:(super)
      +-rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:path-properties/tet:path-route-objects
  /tet:path-route-object/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
+--:(flexi-grid)
  +-ro (single-or-super-channel)?
    +--:(single)
      |  +-ro flexi-n?          10-types:flexi-n
      |  +-ro flexi-m?          10-types:flexi-m
    +--:(super)
      +-ro subcarrier-flexi-n* [flexi-n]
        +-ro flexi-n  10-types:flexi-n
        +-ro flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(flexi-grid)
  +-rw flexi-n?  10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(flexi-grid)
  +-rw flexi-n?  10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(flexi-grid)
  +-rw flexi-grid-channel-spacing?  identityref
  +-rw flexi-n-step?            uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
```



```
/tet:technology:  
+--:(flexi-grid)  
    +-rw flexi-n?    10-types:flexi-n  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:te-node-attributes/tet:connectivity-matrices  
    /tet:connectivity-matrix/tet:to/tet:label-restrictions  
    /tet:label-restriction/tet:label-end/tet:te-label  
    /tet:technology:  
+--:(flexi-grid)  
    +-rw flexi-n?    10-types:flexi-n  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:te-node-attributes/tet:connectivity-matrices  
    /tet:connectivity-matrix/tet:to/tet:label-restrictions  
    /tet:label-restriction/tet:label-step/tet:technology:  
+--:(flexi-grid)  
    +-rw flexi-grid-channel-spacing?    identityref  
    +-rw flexi-n-step?                uint8  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:te-node-attributes/tet:connectivity-matrices  
    /tet:connectivity-matrix/tet:underlay/tet:primary-path  
    /tet:path-element/tet:type/tet:label/tet:label-hop  
    /tet:te-label/tet:technology:  
+--:(flexi-grid)  
    +-rw (single-or-super-channel)?  
        +--:(single)  
            |  +-rw flexi-n?          10-types:flexi-n  
            |  +-rw flexi-m?          10-types:flexi-m  
        +--:(super)  
            +-rw subcarrier-flexi-n* [flexi-n]  
                +-rw flexi-n    10-types:flexi-n  
                +-rw flexi-m?    10-types:flexi-m  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:te-node-attributes/tet:connectivity-matrices  
    /tet:connectivity-matrix/tet:underlay/tet:backup-path  
    /tet:path-element/tet:type/tet:label/tet:label-hop  
    /tet:te-label/tet:technology:  
+--:(flexi-grid)  
    +-rw (single-or-super-channel)?  
        +--:(single)  
            |  +-rw flexi-n?          10-types:flexi-n  
            |  +-rw flexi-m?          10-types:flexi-m  
        +--:(super)  
            +-rw subcarrier-flexi-n* [flexi-n]  
                +-rw flexi-n    10-types:flexi-n  
                +-rw flexi-m?    10-types:flexi-m  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:te-node-attributes/tet:connectivity-matrices  
    /tet:connectivity-matrix/tet:optimizations/tet:algorithm
```



```
    /tet:metric/tet:optimization-metric
    /tet:explicit-route-exclude-objects
    /tet:route-object-exclude-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
++rw (single-or-super-channel)?
++:(single)
| ++rw flexi-n?          10-types:flexi-n
| ++rw flexi-m?          10-types:flexi-m
++:(super)
++rw subcarrier-flexi-n* [flexi-n]
    +-rw flexi-n      10-types:flexi-n
    +-rw flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:optimizations/tet:algorithm
    /tet:metric/tet:optimization-metric
    /tet:explicit-route-include-objects
    /tet:route-object-include-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
++rw (single-or-super-channel)?
++:(single)
| ++rw flexi-n?          10-types:flexi-n
| ++rw flexi-m?          10-types:flexi-m
++:(super)
++rw subcarrier-flexi-n* [flexi-n]
    +-rw flexi-n      10-types:flexi-n
    +-rw flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:te-node-attributes/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:path-properties
    /tet:path-route-objects/tet:path-route-object/tet:type
    /tet:label/tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
++ro (single-or-super-channel)?
++:(single)
| ++ro flexi-n?          10-types:flexi-n
| ++ro flexi-m?          10-types:flexi-m
++:(super)
++ro subcarrier-flexi-n* [flexi-n]
    +-ro flexi-n      10-types:flexi-n
    +-ro flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:label-restrictions/tet:label-restriction
    /tet:label-start/tet:te-label/tet:technology:
++:(flexi-grid)
```



```
    +-+ro flexi-n? 10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:label-restrictions/tet:label-restriction
    /tet:label-end/tet:te-label/tet:technology:
+--:(flexi-grid)
    +-+ro flexi-n? 10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:label-restrictions/tet:label-restriction
    /tet:label-step/tet:technology:
+--:(flexi-grid)
    +-+ro flexi-grid-channel-spacing? identityref
    +-+ro flexi-n-step? uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:underlay/tet:primary-path/tet:path-element/tet:type
    /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
    +-+ro (single-or-super-channel)?
        +--:(single)
            | +-+ro flexi-n? 10-types:flexi-n
            | +-+ro flexi-m? 10-types:flexi-m
        +--:(super)
            +-+ro subcarrier-flexi-n* [flexi-n]
                +-+ro flexi-n 10-types:flexi-n
                +-+ro flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:underlay/tet:backup-path/tet:path-element/tet:type
    /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
    +-+ro (single-or-super-channel)?
        +--:(single)
            | +-+ro flexi-n? 10-types:flexi-n
            | +-+ro flexi-m? 10-types:flexi-m
        +--:(super)
            +-+ro subcarrier-flexi-n* [flexi-n]
                +-+ro flexi-n 10-types:flexi-n
                +-+ro flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:optimizations/tet:algorithm/tet:metric
    /tet:optimization-metric
    /tet:explicit-route-exclude-objects
    /tet:route-object-exclude-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
```



```
+--ro (single-or-super-channel)?
  +---:(single)
    |  +-+ro flexi-n?          1o-types:flexi-n
    |  +-+ro flexi-m?          1o-types:flexi-m
  +---:(super)
    +-+ro subcarrier-flexi-n* [flexi-n]
      +-+ro flexi-n  1o-types:flexi-n
      +-+ro flexi-m?  1o-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:optimizations/tet:algorithm/tet:metric
  /tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
  +---:(flexi-grid)
    +-+ro (single-or-super-channel)?
      +---:(single)
        |  +-+ro flexi-n?          1o-types:flexi-n
        |  +-+ro flexi-m?          1o-types:flexi-m
      +---:(super)
        +-+ro subcarrier-flexi-n* [flexi-n]
          +-+ro flexi-n  1o-types:flexi-n
          +-+ro flexi-m?  1o-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:path-properties/tet:path-route-objects
  /tet:path-route-object/tet:type/tet:label/tet:label-hop
  /tet:te-label/tet:technology:
  +---:(flexi-grid)
    +-+ro (single-or-super-channel)?
      +---:(single)
        |  +-+ro flexi-n?          1o-types:flexi-n
        |  +-+ro flexi-m?          1o-types:flexi-m
      +---:(super)
        +-+ro subcarrier-flexi-n* [flexi-n]
          +-+ro flexi-n  1o-types:flexi-n
          +-+ro flexi-m?  1o-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
  +---:(flexi-grid)
    +-+ro flexi-n?  1o-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from/tet:label-restrictions
```



```
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
++:(flexi-grid)
    +-ro flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:from/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
++:(flexi-grid)
    +-ro flexi-grid-channel-spacing?    identityref
    +-ro flexi-n-step?                uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:to/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
++:(flexi-grid)
    +-ro flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:to/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
++:(flexi-grid)
    +-ro flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:to/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
++:(flexi-grid)
    +-ro flexi-grid-channel-spacing?    identityref
    +-ro flexi-n-step?                uint8
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
    /tet:connectivity-matrix/tet:underlay/tet:primary-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
++:(flexi-grid)
    +-ro (single-or-super-channel)?
        ++:(single)
            | +-ro flexi-n?          10-types:flexi-n
            | +-ro flexi-m?          10-types:flexi-m
        ++:(super)
            +-ro subcarrier-flexi-n* [flexi-n]
                +-ro flexi-n    10-types:flexi-n
                +-ro flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:information-source-entry/tet:connectivity-matrices
```



```
/tet:connectivity-matrix/tet:underlay/tet:backup-path
/tet:path-element/tet:type/tet:label/tet:label-hop
/tet:te-label/tet:technology:
+--:(flexi-grid)
  +--ro (single-or-super-channel)?
    +--:(single)
      |  +--ro flexi-n?          10-types:flexi-n
      |  +--ro flexi-m?          10-types:flexi-m
    +--:(super)
      +--ro subcarrier-flexi-n* [flexi-n]
        +--ro flexi-n  10-types:flexi-n
        +--ro flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:optimizations/tet:algorithm
  /tet:metric/tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
  +--ro (single-or-super-channel)?
    +--:(single)
      |  +--ro flexi-n?          10-types:flexi-n
      |  +--ro flexi-m?          10-types:flexi-m
    +--:(super)
      +--ro subcarrier-flexi-n* [flexi-n]
        +--ro flexi-n  10-types:flexi-n
        +--ro flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:optimizations/tet:algorithm
  /tet:metric/tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
  +--ro (single-or-super-channel)?
    +--:(single)
      |  +--ro flexi-n?          10-types:flexi-n
      |  +--ro flexi-m?          10-types:flexi-m
    +--:(super)
      +--ro subcarrier-flexi-n* [flexi-n]
        +--ro flexi-n  10-types:flexi-n
        +--ro flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:path-properties
  /tet:path-route-objects/tet:path-route-object/tet:type
```



```
/tet:label/tet:label-hop/tet:te-label/tet:technology:  
+--:(flexi-grid)  
    +--ro (single-or-super-channel)?  
        +--:(single)  
            |  +--ro flexi-n?          10-types:flexi-n  
            |  +--ro flexi-m?          10-types:flexi-m  
        +--:(super)  
            +--ro subcarrier-flexi-n* [flexi-n]  
                +--ro flexi-n  10-types:flexi-n  
                +--ro flexi-m?  10-types:flexi-m  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:tunnel-termination-point  
    /tet:local-link-connectivities/tet:label-restrictions  
    /tet:label-restriction/tet:label-start/tet:te-label  
    /tet:technology:  
+--:(flexi-grid)  
    +--rw flexi-n?  10-types:flexi-n  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:tunnel-termination-point  
    /tet:local-link-connectivities/tet:label-restrictions  
    /tet:label-restriction/tet:label-end/tet:te-label  
    /tet:technology:  
+--:(flexi-grid)  
    +--rw flexi-n?  10-types:flexi-n  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:tunnel-termination-point  
    /tet:local-link-connectivities/tet:label-restrictions  
    /tet:label-restriction/tet:label-step/tet:technology:  
+--:(flexi-grid)  
    +--rw flexi-grid-channel-spacing?  identityref  
    +--rw flexi-n-step?              uint8  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:tunnel-termination-point  
    /tet:local-link-connectivities/tet:underlay  
    /tet:primary-path/tet:path-element/tet:type/tet:label  
    /tet:label-hop/tet:te-label/tet:technology:  
+--:(flexi-grid)  
    +--rw (single-or-super-channel)?  
        +--:(single)  
            |  +--rw flexi-n?          10-types:flexi-n  
            |  +--rw flexi-m?          10-types:flexi-m  
        +--:(super)  
            +--rw subcarrier-flexi-n* [flexi-n]  
                +--rw flexi-n  10-types:flexi-n  
                +--rw flexi-m?  10-types:flexi-m  
augment /nw:networks/nw:network/nw:node/tet:te  
    /tet:tunnel-termination-point  
    /tet:local-link-connectivities/tet:underlay
```



```
    /tet:backup-path/tet:path-element/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
  +-rw (single-or-super-channel)?
    +-:(single)
      | +-rw flexi-n?          10-types:flexi-n
      | +-rw flexi-m?          10-types:flexi-m
    +-:(super)
      +-rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
  /tet:explicit-route-exclude-objects
  /tet:route-object-exclude-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
  +-rw (single-or-super-channel)?
    +-:(single)
      | +-rw flexi-n?          10-types:flexi-n
      | +-rw flexi-m?          10-types:flexi-m
    +-:(super)
      +-rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:optimizations
  /tet:algorithm/tet:metric/tet:optimization-metric
  /tet:explicit-route-include-objects
  /tet:route-object-include-object/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
++:(flexi-grid)
  +-rw (single-or-super-channel)?
    +-:(single)
      | +-rw flexi-n?          10-types:flexi-n
      | +-rw flexi-m?          10-types:flexi-m
    +-:(super)
      +-rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities/tet:path-properties
  /tet:path-route-objects/tet:path-route-object/tet:type
  /tet:label/tet:label-hop/tet:te-label/tet:technology:
```



```
+--:(flexi-grid)
  +-ro (single-or-super-channel)?
    +--:(single)
      |  +-ro flexi-n?          10-types:flexi-n
      |  +-ro flexi-m?          10-types:flexi-m
    +--:(super)
      +-ro subcarrier-flexi-n* [flexi-n]
        +-ro flexi-n  10-types:flexi-n
        +-ro flexi-m?  10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-start/tet:te-label
  /tet:technology:
+--:(flexi-grid)
  +-rw flexi-n?  10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-end/tet:te-label
  /tet:technology:
+--:(flexi-grid)
  +-rw flexi-n?  10-types:flexi-n
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:label-restrictions
  /tet:label-restriction/tet:label-step/tet:technology:
+--:(flexi-grid)
  +-rw flexi-grid-channel-spacing?  identityref
  +-rw flexi-n-step?            uint8
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity/tet:underlay
  /tet:primary-path/tet:path-element/tet:type/tet:label
  /tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
  +-rw (single-or-super-channel)?
    +--:(single)
      |  +-rw flexi-n?          10-types:flexi-n
      |  +-rw flexi-m?          10-types:flexi-m
    +--:(super)
      +-rw subcarrier-flexi-n* [flexi-n]
        +-rw flexi-n  10-types:flexi-n
        +-rw flexi-m?  10-types:flexi-m
```



```
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities
    /tet:local-link-connectivity/tet:underlay/tet:backup-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
    +---:(flexi-grid)
        +-rw (single-or-super-channel)?
            +---:(single)
                |  +-rw flexi-n?          10-types:flexi-n
                |  +-rw flexi-m?          10-types:flexi-m
            +---:(super)
                +-rw subcarrier-flexi-n* [flexi-n]
                    +-rw flexi-n    10-types:flexi-n
                    +-rw flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities
    /tet:local-link-connectivity/tet:optimizations
    /tet:algorithm/tet:metric/tet:optimization-metric
    /tet:explicit-route-exclude-objects
    /tet:route-object-exclude-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
    +---:(flexi-grid)
        +-rw (single-or-super-channel)?
            +---:(single)
                |  +-rw flexi-n?          10-types:flexi-n
                |  +-rw flexi-m?          10-types:flexi-m
            +---:(super)
                +-rw subcarrier-flexi-n* [flexi-n]
                    +-rw flexi-n    10-types:flexi-n
                    +-rw flexi-m?    10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities
    /tet:local-link-connectivity/tet:optimizations
    /tet:algorithm/tet:metric/tet:optimization-metric
    /tet:explicit-route-include-objects
    /tet:route-object-include-object/tet:type/tet:label
    /tet:label-hop/tet:te-label/tet:technology:
    +---:(flexi-grid)
        +-rw (single-or-super-channel)?
            +---:(single)
                |  +-rw flexi-n?          10-types:flexi-n
                |  +-rw flexi-m?          10-types:flexi-m
            +---:(super)
                +-rw subcarrier-flexi-n* [flexi-n]
                    +-rw flexi-n    10-types:flexi-n
```



```
          +-rw flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nw:node/tet:te
    /tet:tunnel-termination-point
    /tet:local-link-connectivities
    /tet:local-link-connectivity/tet:path-properties
    /tet:path-route-objects/tet:path-route-object/tet:type
    /tet:label/tet:label-hop/tet:te-label/tet:technology:
+--:(flexi-grid)
    +-ro (single-or-super-channel)?
        +--:(single)
            | +-ro flexi-n? 10-types:flexi-n
            | +-ro flexi-m? 10-types:flexi-m
        +--:(super)
            +-ro subcarrier-flexi-n* [flexi-n]
                +-ro flexi-n 10-types:flexi-n
                +-ro flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:underlay/tet:primary-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
+--:(flexi-grid)
    +-rw (single-or-super-channel)?
        +--:(single)
            | +-rw flexi-n? 10-types:flexi-n
            | +-rw flexi-m? 10-types:flexi-m
        +--:(super)
            +-rw subcarrier-flexi-n* [flexi-n]
                +-rw flexi-n 10-types:flexi-n
                +-rw flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:underlay/tet:backup-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
+--:(flexi-grid)
    +-rw (single-or-super-channel)?
        +--:(single)
            | +-rw flexi-n? 10-types:flexi-n
            | +-rw flexi-m? 10-types:flexi-m
        +--:(super)
            +-rw subcarrier-flexi-n* [flexi-n]
                +-rw flexi-n 10-types:flexi-n
                +-rw flexi-m? 10-types:flexi-m
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
+--:(flexi-grid)
    +-rw flexi-n? 10-types:flexi-n
```



```
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
    +---:(flexi-grid)
        +-rw flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
    +---:(flexi-grid)
        +-rw flexi-grid-channel-spacing?    identityref
        +-rw flexi-n-step?                uint8
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:information-source-entry/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
    +---:(flexi-grid)
        +-ro flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:information-source-entry/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
    +---:(flexi-grid)
        +-ro flexi-n?    10-types:flexi-n
augment /nw:networks/nw:network/nt:link/tet:te
    /tet:information-source-entry/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
    +---:(flexi-grid)
        +-ro flexi-grid-channel-spacing?    identityref
        +-ro flexi-n-step?                uint8
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:underlay/tet:primary-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
    +---:(flexi-grid)
        +-rw (single-or-super-channel)?
            +---:(single)
            | +-rw flexi-n?          10-types:flexi-n
            | +-rw flexi-m?          10-types:flexi-m
            +---:(super)
                +-rw subcarrier-flexi-n* [flexi-n]
                    +-rw flexi-n    10-types:flexi-n
                    +-rw flexi-m?    10-types:flexi-m
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:underlay/tet:backup-path
    /tet:path-element/tet:type/tet:label/tet:label-hop
    /tet:te-label/tet:technology:
    +---:(flexi-grid)
```



```

    +-rw (single-or-super-channel)?
    +---:(single)
    |   +-rw flexi-n?          1o-types:flexi-n
    |   +-rw flexi-m?          1o-types:flexi-m
    +---:(super)
        +-rw subcarrier-flexi-n* [flexi-n]
            +-rw flexi-n      1o-types:flexi-n
            +-rw flexi-m?      1o-types:flexi-m
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-start/tet:te-label
    /tet:technology:
+---:(flexi-grid)
    +-rw flexi-n?  1o-types:flexi-n
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-end/tet:te-label
    /tet:technology:
+---:(flexi-grid)
    +-rw flexi-n?  1o-types:flexi-n
augment /nw:networks/tet:te/tet:templates/tet:link-template
    /tet:te-link-attributes/tet:label-restrictions
    /tet:label-restriction/tet:label-step/tet:technology:
+---:(flexi-grid)
    +-rw flexi-grid-channel-spacing?  identityref
    +-rw flexi-n-step?           uint8

```

## [7. The YANG Code for Flexi-grid topology](#)

```

<CODE BEGINS> file "ietf-flexi-grid-topology@2020-02-22.yang"
module ietf-flexi-grid-topology {
    yang-version 1.1;
    namespace "urn:ietf:params:xml:ns:yang:ietf-flexi-grid-topology";
    prefix "flexgt";

    import ietf-network {
        prefix "nw";
        reference
            "RFC 8345: A YANG Data Model for Network Topologies";
    }

    import ietf-network-topology {
        prefix "nt";
        reference
            "RFC 8345: A YANG Data Model for Network Topologies";
    }
}

```



```
}

import ietf-te-topology {
    prefix "tet";
    reference
        "RFC 8795: YANG Data Model for Traffic Engineering
        (TE) Topologies";
}

import ietf-layer0-types {
    prefix "l0-types";
    reference
        "RFC XXXX: A YANG Data Model for Layer 0 Types";
}

/* Note: The RFC Editor will replace XXXX with the number assigned
   to the RFC once draft-ietf-ccamp-layer0-types becomes an RFC.*/

organization
    "IETF CCAMP Working Group";
contact
    "WG Web: <http://tools.ietf.org/wg/ccamp/>
     WG List: <mailto:ccamp@ietf.org>
     Editor: Jorge E. Lopez de Vergara
             <mailto:jorge.lopez_vergara@uam.es>
     Editor: Daniel Perdices
             <mailto:daniel.perdices@uam.es>
     Editor: Haomian Zheng
             <mailto:zhenghaomian@huawei.com>
     Editor: Daniel King
             <mailto:d.king@lancaster.ac.uk>
     Editor: Young Lee
             <mailto:younglee.tx@gmail.com>";

description
    "This module provides a YANG data model for the routing and
     wavelength assignment (RWA) Traffic Engineering (TE)
     topology in flexi-grid optical networks. The YANG model
     described in this document is a flexi-grid technology-specific
     YANG model augmenting the generic TE topology module
     (ietf-te-topology, RFC 9795) based on the RFC 7698 and 7699.
     Copyright (c) 2020 IETF Trust and the persons identified
     as authors of the code. All rights reserved.
     Redistribution and use in source and binary forms, with
     or without modification, is permitted pursuant to, and
     subject to the license terms contained in, the Simplified
     BSD License set forth in Section 4.c of the IETF Trust's
     Legal Provisions Relating to IETF Documents"
```



(<http://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2020-02-22 {
  description
    "Initial Version";
  reference
    "RFC XXXX: A YANG Data Model for Flexi-Grid Optical Networks";
    // RFC Ed.: replace XXXX with actual RFC number, update date
    // information and remove this note
}

/*
 * Data nodes
 */

augment "/nw:networks/nw:network/nw:network-types"
  + "/tet:te-topology" {
  description
    "Augment network types to define flexi-grid topology type.";
  container flexi-grid-topology {
    presence
      "Its presence identifies the flexi-grid topology type.";
    description
      "Introduce new network type for flexi-grid topology.";
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te"
  + "/tet:te-node-attributes" {
  when "/nw:networks/nw:network/nw:network-types"
    + "/tet:te-topology/flexgt:flexi-grid-topology" {
    description
      "Augmentation parameters apply only for networks with
       flexi-grid topology type.";
  }
  description "Augment TE node attributes.";
  container flexi-grid-node {
    presence "The TE node is a flexi-grid node.";
    description
      "Introduce new TE node type for flexi-grid node.";
  }
}

/*
 * Augment TE label range information
*/
```



```
*/  
  
augment "/nw:networks/nw:network/nw:node/tet:te/"  
    + "tet:te-node-attributes/tet:connectivity-matrices/"  
    + "tet:label-restrictions/tet:label-restriction" {  
when ".../.../.../.../.../nw:network-types/tet:te-topology/"  
    + "flexgt:flexi-grid-topology" {  
        description  
            "Augmentation parameters apply only for networks with  
            flexi-grid topology type.;"  
    }  
        description  
            "Augment TE label range information for the TE node  
            connectivity matrices.";  
        uses 1o-types:flexi-grid-label-range-info;  
    }  
  
augment "/nw:networks/nw:network/nw:node/tet:te/"  
    + "tet:te-node-attributes/tet:connectivity-matrices/"  
    + "tet:connectivity-matrix/tet:from/"  
    + "tet:label-restrictions/tet:label-restriction" {  
when ".../.../.../.../.../.../nw:network-types/tet:te-topology/"  
    + "flexgt:flexi-grid-topology" {  
        description  
            "Augmentation parameters apply only for networks with  
            flexi-grid topology type.;"  
    }  
        description  
            "Augment TE label range information for the source Link  
            Termination Point (LTP) of the connectivity matrix entry.";  
        uses 1o-types:flexi-grid-label-range-info;  
    }  
  
augment "/nw:networks/nw:network/nw:node/tet:te/"  
    + "tet:te-node-attributes/tet:connectivity-matrices/"  
    + "tet:connectivity-matrix/tet:to/"  
    + "tet:label-restrictions/tet:label-restriction" {  
when ".../.../.../.../.../nw:network-types/tet:te-topology/"  
    + "flexgt:flexi-grid-topology" {  
        description  
            "Augmentation parameters apply only for networks with  
            flexi-grid topology type.;"  
    }  
        description  
            "Augment TE label range information for the destination LTP  
            of the connectivity matrix entry.";  
        uses 1o-types:flexi-grid-label-range-info;  
    }
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/"
    + "tet:connectivity-matrices/tet:label-restrictions/"
    + "tet:label-restriction" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the TE node
     connectivity matrices information source.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix"
    + "tet:from/tet:label-restrictions/tet:label-restriction" {
when ".../.../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the source LTP
     of the connectivity matrix entry information source.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix"
    + "tet:to/tet:label-restrictions/tet:label-restriction" {
when ".../.../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the destination LTP
     of the connectivity matrix entry information source.";
uses 1o-types:flexi-grid-label-range-info;
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:label-restrictions/tet:label-restriction" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the Tunnel
     Termination Point (TTP) Local Link Connectivities.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:label-restrictions/tet:label-restriction" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the TTP
     Local Link Connectivity entry.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction" {
when ".../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range information for the TE link.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
```



```
+ "tet:information-source-entry/"
+ "tet:label-restrictions/tet:label-restriction" {
when "../..../..../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label range information for the TE link
information source.";
uses 1o-types:flexi-grid-label-range-info;
}

augment "/nw:networks/tet:te/tet:templates/"
+ "tet:link-template/tet:te-link-attributes/"
+ "tet:label-restrictions/tet:label-restriction" {
description
"Augment TE label range information for the TE link template.";
uses 1o-types:flexi-grid-label-range-info;
}

/*
 * Augment TE label
 */

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-start/"
+ "tet:te-label/tet:technology" {
when "../..../..../..../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label range start for the TE node
connectivity matrices.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:label-restrictions/"
```



```
+ "tet:label-restriction/tet:label-end/"
+ "tet:te-label/tet:technology" {
when "../../../../../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label range end for the TE node
connectivity matrices.";
case flexi-grid {
uses l0-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:label-restrictions/"
+ "tet:label-restriction/tet:label-step/"
+ "tet:technology" {
when "../../../../../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label range step for the TE node
connectivity matrices.";
case flexi-grid {
uses l0-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:underlay/tet:primary-path/tet:path-element/"
+ "tet:type/tet:label/tet:label-hop/"
+ "tet:te-label/tet:technology" {
when "../../../../../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
```



```
"Augment TE label hop for the underlay primary path of the
TE node connectivity matrices.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:underlay/tet:backup-path/tet:path-element/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the underlay backup path of the
    TE node connectivity matrices.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:optimizations/tet:algorithm/tet:metric/"
    + "tet:optimization-metric/"
    + "tet:explicit-route-exclude-objects/"
    + "tet:route-object-exclude-object/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TE node connectivity
    matrices.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
```



```
        }
```

```
}
```

```
augment "/nw:networks/nw:network/nw:node/tet:te/"
```

```
    + "tet:te-node-attributes/tet:connectivity-matrices/"
```

```
    + "tet:optimizations/tet:algorithm/tet:metric/"
```

```
    + "tet:optimization-metric/"
```

```
    + "tet:explicit-route-include-objects/"
```

```
    + "tet:route-object-include-object/"
```

```
    + "tet:type/tet:label/tet:label-hop/"
```

```
    + "tet:te-label/tet:technology" {
```

```
when ".../.../.../.../.../.../.../.../..."
```

```
    + "nw:network-types/tet:te-topology/"
```

```
    + "flexgt:flexi-grid-topology" {
```

```
description
```

```
    "Augmentation parameters apply only for networks with
```

```
     flexi-grid topology type.;"
```

```
}
```

```
description
```

```
    "Augment TE label hop for the explicit route objects included
```

```
     by the path computation of the TE node connectivity
```

```
     matrices.";
```

```
case flexi-grid {
```

```
    uses 1o-types:flexi-grid-label-hop;
```

```
}
```

```
}
```

```
augment "/nw:networks/nw:network/nw:node/tet:te/"
```

```
    + "tet:te-node-attributes/tet:connectivity-matrices/"
```

```
    + "tet:path-properties/tet:path-route-objects/"
```

```
    + "tet:path-route-object/tet:type/tet:label/tet:label-hop/"
```

```
    + "tet:te-label/tet:technology" {
```

```
when ".../.../.../.../.../.../.../..."
```

```
    + "nw:network-types/tet:te-topology/"
```

```
    + "flexgt:flexi-grid-topology" {
```

```
description
```

```
    "Augmentation parameters apply only for networks with
```

```
     flexi-grid topology type.;"
```

```
}
```

```
description
```

```
    "Augment TE label hop for the computed path route objects
```

```
     of the TE node connectivity matrices.";
```

```
case flexi-grid {
```

```
    uses 1o-types:flexi-grid-label-hop;
```

```
}
```

```
}
```

```
augment "/nw:networks/nw:network/nw:node/tet:te/"
```



```
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/tet:from/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-start/"
+ "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label range start for the source LTP
  of the connectivity matrix entry.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/tet:from/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-end/"
+ "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label range end for the source LTP
  of the connectivity matrix entry.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/tet:from/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-step/"
+ "tet:technology" {
when ".../.../.../.../.../.../.../..."
```



```
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label range step for the source LTP
  of the connectivity matrix entry.";
case flexi-grid {
  uses lo-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/tet:to/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-start/"
+ "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label range start for the destination LTP
  of the connectivity matrix entry.";
case flexi-grid {
  uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/tet:to/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-end/"
+ "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
```



```
description
  "Augment TE label range end for the destination LTP
   of the connectivity matrix entry.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/tet:to/"
  + "tet:label-restrictions/tet:label-restriction/"
  + "tet:label-step/"
  + "tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label range step for the destination LTP
   of the connectivity matrix entry.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:underlay/tet:primary-path/tet:path-element/"
  + "tet:type/tet:label/tet:label-hop/"
  + "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label hop for the underlay primary path
   of the connectivity matrix entry.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-hop;
}
```



```
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:underlay/tet:backup-path/tet:path-element/"
    + "tet:type/tet:label/tet:label-hop/"
    + "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the underlay backup path
    of the connectivity matrix entry.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:optimizations/"
    + "tet:algorithm/tet:metric/tet:optimization-metric/"
    + "tet:explicit-route-exclude-objects/"
    + "tet:route-object-exclude-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the connectivity matrix entry.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te"
    + "tet:te-node-attributes/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/tet:optimizations/"
```



```
+ "tet:algorithm/tet:metric/tet:optimization-metric/"
+ "tet:explicit-route-include-objects/"
+ "tet:route-object-include-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the explicit route objects included
by the path computation of the connectivity matrix entry.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:te-node-attributes/tet:connectivity-matrices/"
+ "tet:connectivity-matrix/"
+ "tet:path-properties/tet:path-route-objects/"
+ "tet:path-route-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the computed path route objects
of the connectivity matrix entry.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/"
+ "tet:connectivity-matrices/tet:label-restrictions/"
+ "tet:label-restriction/"
+ "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
```



```
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label range start for the TE node connectivity
   matrices information source.";
case flexi-grid {
  uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/"
  + "tet:connectivity-matrices/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-end/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label range end for the TE node connectivity
   matrices information source.";
case flexi-grid {
  uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/"
  + "tet:connectivity-matrices/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-step/tet:technology" {
when ".../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label range step for the TE node connectivity
   matrices information source.";
case flexi-grid {
```



```
    uses lo-types:flexi-grid-label-step;
  }

}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
    "Augmentation parameters apply only for networks with
      flexi-grid topology type.";
}
  description
    "Augment TE label hop for the underlay primary path
      of the TE node connectivity matrices of the information
        source entry.";
  case flexi-grid {
    uses lo-types:flexi-grid-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
    "Augmentation parameters apply only for networks with
      flexi-grid topology type.";
}
  description
    "Augment TE label hop for the underlay backup path
      of the TE node connectivity matrices of the information
        source entry.";
  case flexi-grid {
    uses lo-types:flexi-grid-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
```



```
+ "tet:explicit-route-exclude-objects/"
+ "tet:route-object-exclude-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the explicit route objects excluded
by the path computation of the TE node connectivity matrices
information source.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-include-objects/"
+ "tet:route-object-include-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the explicit route objects included
by the path computation of the TE node connectivity matrices
information source.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:information-source-entry/tet:connectivity-matrices/"
+ "tet:path-properties/tet:path-route-objects/"
+ "tet:path-route-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
```



```
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label hop for the computed path route objects
  of the TE node connectivity matrices information source.";
case flexi-grid {
  uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:from/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label range start for the source LTP
  of the connectivity matrix entry information source.";
case flexi-grid {
  uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:from/tet:label-restrictions/"
  + "tet:label-restriction/"
  + "tet:label-end/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
```



```
"Augment TE label range end for the source LTP
of the connectivity matrix entry information source.";;
case flexi-grid {
    uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:from/tet:label-restrictions/"
    + "tet:label-restriction/"
    + "tet:label-step/tet:technology" {
when ".../.../.../.../.../.../.../...""
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
}
description
    "Augment TE label range step for the source LTP
of the connectivity matrix entry information source.";;
case flexi-grid {
    uses 1o-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:to/tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../...""
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
}
description
    "Augment TE label range start for the destination LTP
of the connectivity matrix entry information source.";;
case flexi-grid {
    uses 1o-types:flexi-grid-label-start-end;
}
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:to/tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label range end for the destination LTP
    of the connectivity matrix entry information source.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:to/tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label range step for the destination LTP
    of the connectivity matrix entry information source.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
```



```
description
  "Augmentation parameters apply only for networks with
   flexi-grid topology type.";
}
description
  "Augment TE label hop for the underlay primary path
   of the connectivity matrix entry information source.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
  description
    "Augment TE label hop for the underlay backup path
     of the connectivity matrix entry information source.";
case flexi-grid {
  uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-exclude-objects/"
  + "tet:route-object-exclude-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
  description
```



```
"Augment TE label hop for the explicit route objects excluded
by the path computation of the connectivity matrix entry
information source.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:optimizations/tet:algorithm/tet:metric/"
    + "tet:optimization-metric/"
    + "tet:explicit-route-include-objects/"
    + "tet:route-object-include-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
        description
            "Augmentation parameters apply only for networks with
            flexi-grid topology type.";
    }
        description
            "Augment TE label hop for the explicit route objects included
            by the path computation of the connectivity matrix entry
            information source.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-hop;
    }
}
}

augment "/nw:networks/nw:network/nw:node/tet:te"
    + "tet:information-source-entry/tet:connectivity-matrices/"
    + "tet:connectivity-matrix/"
    + "tet:path-properties/tet:path-route-objects/"
    + "tet:path-route-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
        description
            "Augmentation parameters apply only for networks with
            flexi-grid topology type.";
    }
        description
            "Augment TE label hop for the computed path route objects
            of the connectivity matrix entry information source.";
```



```
case flexi-grid {
    uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/"
    + "tet:te-label/tet:technology" {
when ".../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range start for the TTP
     Local Link Connectivities.";
case flexi-grid {
    uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/"
    + "tet:te-label/tet:technology"{
when ".../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
     flexi-grid topology type.";
}
description
    "Augment TE label range end for the TTP
     Local Link Connectivities.";
case flexi-grid {
    uses lo-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
```



```
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-step/"
+ "tet:technology"{
when ".../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label range step for the TTP
    Local Link Connectivities.";
case flexi-grid {
    uses lo-types:flexi-grid-label-step;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the underlay primary path
    of the TTP Local Link Connectivities.";
case flexi-grid {
    uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
```



```
description
  "Augmentation parameters apply only for networks with
  flexi-grid topology type.";
}
description
  "Augment TE label hop for the underlay backup path
  of the TTP Local Link Connectivities.";
case flexi-grid {
  uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-exclude-objects/"
  + "tet:route-object-exclude-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
  description
    "Augment TE label hop for the explicit route objects excluded
    by the path computation of the TTP Local Link
    Connectivities.";
  case flexi-grid {
    uses lo-types:flexi-grid-label-hop;
  }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:optimizations/tet:algorithm/tet:metric/"
  + "tet:optimization-metric/"
  + "tet:explicit-route-include-objects/"
  + "tet:route-object-include-object/tet:type/"
  + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
  + "nw:network-types/tet:te-topology/"
  + "flexgt:flexi-grid-topology" {
  description
```



```
        "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
    }
    description
        "Augment TE label hop for the explicit route objects included
        by the path computation of the TTP Local Link
        Connectivities.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-hop;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:path-properties/tet:path-route-objects/"
    + "tet:path-route-object/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
        description
            "Augmentation parameters apply only for networks with
            flexi-grid topology type.";
    }
    description
        "Augment TE label hop for the computed path route objects
        of the TTP Local Link Connectivities.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-hop;
    }
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
        description
            "Augmentation parameters apply only for networks with
            flexi-grid topology type.";
    }
    description
        "Augment TE label range start for the TTP
```



```
    Local Link Connectivity entry.";  
  case flexi-grid {  
    uses 10-types:flexi-grid-label-start-end;  
  }  
}  
  
augment "/nw:networks/nw:network/nw:node/tet:te/"  
  + "tet:tunnel-termination-point/"  
  + "tet:local-link-connectivities/"  
  + "tet:local-link-connectivity/"  
  + "tet:label-restrictions/tet:label-restriction/"  
  + "tet:label-end/tet:te-label/tet:technology" {  
when ".../.../.../.../.../.../..."  
  + "nw:network-types/tet:te-topology/"  
  + "flexgt:flexi-grid-topology" {  
    description  
      "Augmentation parameters apply only for networks with  
      flexi-grid topology type.";  
  }  
  description  
    "Augment TE label range end for the TTP  
    Local Link Connectivity entry.";  
  case flexi-grid {  
    uses 10-types:flexi-grid-label-start-end;  
  }  
}  
  
augment "/nw:networks/nw:network/nw:node/tet:te/"  
  + "tet:tunnel-termination-point/"  
  + "tet:local-link-connectivities/"  
  + "tet:local-link-connectivity/"  
  + "tet:label-restrictions/tet:label-restriction/"  
  + "tet:label-step/tet:technology" {  
when ".../.../.../.../.../..."  
  + "nw:network-types/tet:te-topology/"  
  + "flexgt:flexi-grid-topology" {  
    description  
      "Augmentation parameters apply only for networks with  
      flexi-grid topology type.";  
  }  
  description  
    "Augment TE label range step for the TTP  
    Local Link Connectivity entry.";  
  case flexi-grid {  
    uses 10-types:flexi-grid-label-step;  
  }  
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the underlay primary path
    of the TTP Local Link Connectivity entry.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
    + "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
    + "nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label hop for the underlay backup path
    of the TTP Local Link Connectivity entry.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities/"
    + "tet:local-link-connectivity/"
    + "tet:optimizations/tet:algorithm/tet:metric/"
    + "tet:optimization-metric/"
```



```
+ "tet:explicit-route-exclude-objects/"
+ "tet:route-object-exclude-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the explicit route objects excluded
by the path computation of the TTP Local Link
Connectivity entry.";
case flexi-grid {
uses 10-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:local-link-connectivity/"
+ "tet:optimizations/tet:algorithm/tet:metric/"
+ "tet:optimization-metric/"
+ "tet:explicit-route-include-objects/"
+ "tet:route-object-include-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the explicit route objects included
by the path computation of the TTP Local Link
Connectivity entry.";
case flexi-grid {
uses 10-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nw:node/tet:te/"
+ "tet:tunnel-termination-point/"
+ "tet:local-link-connectivities/"
+ "tet:local-link-connectivity/"
```



```
+ "tet:path-properties/tet:path-route-objects/"
+ "tet:path-route-object/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the computed path route objects
of the TTP Local Link Connectivity entry.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}
augment "/nw:networks/nw:network/nt:link/tet:te/"
+ "tet:te-link-attributes/"
+ "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label hop for the underlay primary path
of the TE link.";
case flexi-grid {
uses 1o-types:flexi-grid-label-hop;
}
}
augment "/nw:networks/nw:network/nt:link/tet:te/"
+ "tet:te-link-attributes/"
+ "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
when ".../.../.../.../.../.../..."
+ "nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
```



```
"Augment TE label hop for the underlay backup path
of the TE link.";
case flexi-grid {
    uses l0-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label range start for the TE link.";
case flexi-grid {
    uses l0-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
    "Augmentation parameters apply only for networks with
    flexi-grid topology type.";
}
description
    "Augment TE label range end for the TE link.";
case flexi-grid {
    uses l0-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
when ".../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
description
```



```
        "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
    }
    description
        "Augment TE label range step for the TE link.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-step;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-start/tet:te-label/tet:technology" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
    description
        "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
}
    description
        "Augment TE label range start for the TE link
        information source.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-start-end;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
when ".../.../.../.../.../nw:network-types/tet:te-topology/"
    + "flexgt:flexi-grid-topology" {
    description
        "Augmentation parameters apply only for networks with
        flexi-grid topology type.";
}
    description
        "Augment TE label range end for the TE link
        information source.";
    case flexi-grid {
        uses 1o-types:flexi-grid-label-start-end;
    }
}

augment "/nw:networks/nw:network/nt:link/tet:te/"
    + "tet:information-source-entry/"
```



```
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-step/tet:technology" {
when "../../../../../nw:network-types/tet:te-topology/"
+ "flexgt:flexi-grid-topology" {
description
"Augmentation parameters apply only for networks with
flexi-grid topology type.";
}
description
"Augment TE label range step for the TE link
information source.";
case flexi-grid {
uses lo-types:flexi-grid-label-step;
}
}

augment "/nw:networks/tet:te/tet:templates/"
+ "tet:link-template/tet:te-link-attributes/"
+ "tet:underlay/tet:primary-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
description
"Augment TE label hop for the underlay primary path
of the TE link template.";
case flexi-grid {
uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/tet:te/tet:templates/"
+ "tet:link-template/tet:te-link-attributes/"
+ "tet:underlay/tet:backup-path/tet:path-element/tet:type/"
+ "tet:label/tet:label-hop/tet:te-label/tet:technology" {
description
"Augment TE label hop for the underlay backup path
of the TE link template.";
case flexi-grid {
uses lo-types:flexi-grid-label-hop;
}
}

augment "/nw:networks/tet:te/tet:templates/"
+ "tet:link-template/tet:te-link-attributes/"
+ "tet:label-restrictions/tet:label-restriction/"
+ "tet:label-start/tet:te-label/tet:technology" {
description
"Augment TE label range start for the TE link template.";
case flexi-grid {
uses lo-types:flexi-grid-label-start-end;
```



```
        }

    }

augment "/nw:networks/tet:te/tet:templates/"
    + "tet:link-template/tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-end/tet:te-label/tet:technology" {
description
    "Augment TE label range end for the TE link template.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-start-end;
}
}

augment "/nw:networks/tet:te/tet:templates/"
    + "tet:link-template/tet:te-link-attributes/"
    + "tet:label-restrictions/tet:label-restriction/"
    + "tet:label-step/tet:technology" {
description
    "Augment TE label range step for the TE link template.";
case flexi-grid {
    uses 1o-types:flexi-grid-label-step;
}
}
}

<CODE ENDS>
```

## **8. Security Considerations**

The YANG module specified in this document defines a schema for data that is designed to be accessed via network management protocols such as NETCONF [[RFC6241](#)] or RESTCONF [[RFC8040](#)]. The lowest NETCONF layer is the secure transport layer, and the mandatory-to-implement secure transport is Secure Shell (SSH) [[RFC6242](#)]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is Transport Layer Security (TLS) [[RFC8446](#)].

The NETCONF access control model [[RFC8341](#)] provides the means to restrict access for particular NETCONF users to a preconfigured subset of all available NETCONF protocol operations and content. The NETCONF Protocol SSH [[RFC6242](#)] describes a method for invoking and running NETCONF within a SSH session as an SSH subsystem. The Network Configuration Access Control Model (NACM) [[RFC8341](#)] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.



A number of configuration data nodes defined in this document are writable/deletable (i.e., "config true"). These data nodes may be considered sensitive or vulnerable in some network environments.

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) to these data nodes without proper protection can have a negative effect on network operations. These are the subtrees and data nodes and their sensitivity/vulnerability:

```
/nw:networks/nw:network/nw:network-types/tet:te-topology  
  
/nw:networks/nw:network/nt:link/tet:te/tet:te-link-attributes  
  
/nw:networks/nw:network/nw:node/nt:termination-point/tet:te  
  
/nw:networks/nw:network/nw:node/tet:te/tet:te-node-attributes  
/te-connectivity-matrices/te-connectivity-matrix/tet:path-  
constraints/tet:te-bandwidth/tet:technology  
  
/nw:networks/nw:network/nw:node/tet:te  
/tet:tunnel-termination-point/tet:local-link-connectivities  
/tet:label-restrictions/tet:label-restriction
```

## **9. IANA Considerations**

IANA is requested to assigned a new URI from the "IETF XML Registry" [[RFC3688](#)] as follows:

URI: `urn:ietf:params:xml:ns:yang:ietf-flexi-grid-topology`  
Registrant Contact: The IESG  
XML: N/A; the requested URI is an XML namespace.

IANA is requested to assign a new YANG module name in the "YANG Module Names" registry [[RFC6020](#)] as follows:



Name: ietf-flexi-grid-topology  
Namespace: urn:ietf:params:xml:ns:yang:ietf-flexi-grid-topology  
Prefix: flexi-grid-topology  
Reference: [This.I-D]

## **10. Contributors**

This work was developed by several additional people, who due to frontpage author restrictions, are listed below:

Oscar Gonzalez de Dios  
Telefonica I+D/GCTO  
Email: oscar.gonzalezdedios@telefonica.com

Gabriele Galimberti  
Cisco  
Email: ggalimbe@cisco.com

Zafar Ali  
Cisco  
Email: zali@cisco.com

Daniel Michaud Vallinoto  
Universidad Autonoma de Madrid  
Email: daniel.michaud@estudiante.uam.es

Steven Hill,  
MTN Group Technology  
Email: Steven.Hill@mtn.com

Victor Lopez  
Nokia  
Email: victor.lopez@nokia.comm

Italo Busi  
Huawei  
Email: Italo.Busi@huawei.com

Aihua Guo  
Futurewei  
Email: aihuaguo.ietf@gmail.com

## **11. Acknowledgments**

The work presented in this document has been partially funded by the European Commission under the project H2020 METRO-HAUL (Metro High



bandwidth, 5G Application-aware optical network, with edge storage, compUte and low Latency), Grant Agreement number: 761727.

This work is also partially funded by the Spanish State Research Agency under the project AgileMon (AEI PID2019-104451RB-C21) and by the Spanish Ministry of Science, Innovation and Universities under the program for the training of university lecturers (Grant number: FPU19/05678).

Thanks to Adrian Farrel for reviewing this document and assisting with conversion to XML.

## **12. References**

### **12.1. Normative References**

- [I-D.ietf-ccamp-layer0-types]  
Zheng, H., Lee, Y., Guo, A., Lopez, V., and D. King, "A YANG Data Model for Layer 0 Types", [draft-ietf-ccamp-layer0-types-09](#) (work in progress), December 2020.
- [RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", [RFC 6241](#), DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", [RFC 6242](#), DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC7699] Farrel, A., King, D., Li, Y., and F. Zhang, "Generalized Labels for the Flexi-Grid in Lambda Switch Capable (LSC) Label Switching Routers", [RFC 7699](#), DOI 10.17487/RFC7699, November 2015, <<https://www.rfc-editor.org/info/rfc7699>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", [RFC 7950](#), DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.



- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", [RFC 8040](#), DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, [RFC 8341](#), DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", [RFC 8342](#), DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/info/rfc8342>>.
- [RFC8345] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., and X. Liu, "A YANG Data Model for Network Topologies", [RFC 8345](#), DOI 10.17487/RFC8345, March 2018, <<https://www.rfc-editor.org/info/rfc8345>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", [RFC 8446](#), DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [RFC8795] Liu, X., Bryskin, I., Beeram, V., Saad, T., Shah, H., and O. Gonzalez de Dios, "YANG Data Model for Traffic Engineering (TE) Topologies", [RFC 8795](#), DOI 10.17487/RFC8795, August 2020, <<https://www.rfc-editor.org/info/rfc8795>>.

## [12.2. Informative References](#)

- [G.694.1] International Telecommunication Union, "Spectral grids for WDM applications: DWDM frequency grid", ITUT G.872, February 2012.
- [G.872] International Telecommunication Union, "Architecture of optical transport networks", ITUT G.872, November 2010.
- [I-D.ietf-ccamp-flexigrid-media-channel-yang] Mendez, J. E. L. D. V., Burrero, D. P., King, D., Lopez, V., Busi, I., Dios, O. G. D., Lee, Y., and G. Galimberti, "A YANG Data Model for Flexi-Grid Media Channels", [draft-ietf-ccamp-flexigrid-media-channel-yang-03](#) (work in progress), February 2021.



[I-D.ietf-ccamp-optical-impairment-topology-yang]

Lee, Y., Auge, J., Lopez, V., Galimberti, G., and D. Beller, "A YANG Data Model for Optical Impairment-aware Topology", [draft-ietf-ccamp-optical-impairment-topology-yang-06](#) (work in progress), February 2021.

[RFC7698] Gonzalez de Dios, O., Ed., Casellas, R., Ed., Zhang, F., Fu, X., Ceccarelli, D., and I. Hussain, "Framework and Requirements for GMPLS-Based Control of Flexi-Grid Dense Wavelength Division Multiplexing (DWDM) Networks", [RFC 7698](#), DOI 10.17487/RFC7698, November 2015, <<https://www.rfc-editor.org/info/rfc7698>>.

[RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", [BCP 215](#), [RFC 8340](#), DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.

#### Authors' Addresses

Jorge E. Lopez de Vergara Mendez  
Naudit HPCN

Email: [jorge.lopez\\_vergara@uam.es](mailto:jorge.lopez_vergara@uam.es)

Daniel Perdices Burrero  
Universidad Autonoma de Madrid

Email: [daniel.perdices@uam.es](mailto:daniel.perdices@uam.es)

Daniel King  
Old Dog Consulting

Email: [daniel@olddog.co.uk](mailto:daniel@olddog.co.uk)

Young Lee  
Samsung

Email: [younghlee.tx@gmail.co](mailto:younghlee.tx@gmail.co)

Haomian Zheng  
Huawei Technologies

Email: [zhenghaomian@huawei.com](mailto:zhenghaomian@huawei.com)

