

CCAMP Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: January 13, 2013

D. Ceccarelli  
D. Caviglia  
F. Fondelli  
Ericsson  
F. Zhang  
D. Li  
Huawei Technologies  
D. Beller  
Alcatel-Lucent  
July 12, 2012

Link Management Protocol (LMP) Test Messages Extensions for Evolutive  
Optical Transport Networks (OTN)  
draft-ceccarelli-ccamp-gmpls-g709-lmp-test-04

## Abstract

This document specifies Link Management Protocol (LMP) extensions for the support of enhanced Optical Transport Networks (OTN). In particular it updates LMP test messages detailing the ITU-T G.709 OTN technology specific information and extends them in order to cover also recently introduced signal types and containers defined by the ITU-T.

## Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 13, 2013.

## Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal

## Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Verifying Link Connectivity . . . . .	<a href="#">3</a>
<a href="#">3.1.</a>	Encoding Type . . . . .	<a href="#">4</a>
<a href="#">3.2.</a>	Verify Transport Mechanism . . . . .	<a href="#">5</a>
<a href="#">3.3.</a>	Transmission Rate . . . . .	<a href="#">6</a>
<a href="#">4.</a>	Trace Monitoring . . . . .	<a href="#">7</a>
<a href="#">4.1.</a>	TRACE Object for evolutive OTN . . . . .	<a href="#">7</a>
4.2.	Discovery Response Message for Layer Adjacency Discovery . . . . .	<a href="#">8</a>
<a href="#">5.</a>	LMP Behavior Negotiation update . . . . .	<a href="#">9</a>
<a href="#">6.</a>	Security Considerations . . . . .	<a href="#">10</a>
<a href="#">7.</a>	Acknowledgements . . . . .	<a href="#">10</a>
<a href="#">8.</a>	IANA Considerations . . . . .	<a href="#">10</a>
<a href="#">9.</a>	References . . . . .	<a href="#">10</a>
<a href="#">9.1.</a>	Normative References . . . . .	<a href="#">10</a>
<a href="#">9.2.</a>	Informative References . . . . .	<a href="#">11</a>
	Authors' Addresses . . . . .	<a href="#">11</a>

## 1. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

## 2. Introduction

[RFC4204] defines the Link Management Protocol (LMP), which is a protocol of the Generalized Multi-Protocol Label Switching (GMPLS) [[RFC3945](#)] suite used to manage Traffic Engineering (TE) links. A TE link may be made by multiple physical resources interconnecting Label Switched Routers (LSRs), that are combined together for scalability reasons.

Current definition of LMP consists of two mandatory procedures:

- Control channel management: used to maintain control channels connectivity between adjacent LSRs. Such procedure is based on the exchange of a message called Config message followed by a lightweight keep-alive message exchange
- Link property correlation: used to combine multiple physical links into a single TE link.

and two optional procedures:

- Link verification: used to verify the connectivity of the physical links composing a TE link and to exchange their Interface\_Ids
- Fault management: used to suppress alarms and locate failures. This feature may not be needed in G.709 networks because fault management mechanisms are provided by the G.709 architecture.

This document defines G.709 technology specific information needed when running LMP. In particular it is focused on link verification and link property correlation functionalities and the G.709 test procedures they are based on. Such procedures require the definition of a G.709 specific TRACE object. After data links have been verified, it is possible to group them into the TE links.

### [3.](#) Verifying Link Connectivity

[RFC4204] defines a link verification procedure based on the in-band transmission of Test messages over the data links. It is used to

verify the physical connectivity of such links, to discover data plane resources and to exchange the Interface\_Ids. It is also possible to use a single procedure to verify multiple data links and correlate the information collected by means of the Verify\_Id assigned to the procedure.

The link verification procedure works as follows:

- BeginVerify message: the local node sends a BeginVerify message over a control channel. It includes a BEGIN\_VERIFY object which contains all the parameters characterizing the data link like, for example, the number of data links that must be verified, the transmission interval of the Test messages or the wavelength over which the Test messages will be sent.
- BeginVerifyAck: if the remote node, upon receiving a BeginVerify message, is ready to begin the procedure, it replies with a BeginVerifyAck message. Such message specifies the desired transport mechanism for the Test messages and the Verify\_Id of the procedure assigned by the remote node.
- Data link Testing: the local node, upon receiving the BeginVerifyAck message, can begin testing the data links repeatedly sending Test messages over them. The remote node will reply either with a TestStatsSuccess or a TestStatusFailure for each data link. As a consequence the local node will send a TestStatusAck.
- End of testing: The local node can terminate the Test procedure

at anytime just sending an EndVerifyMessage towards the remote node.

Evolutionary OTNs need the support from LMP for the testing of all the possible data links defined by ITU-T. This document provides, at present, support to the data links defined by G.709 and G.709 amendment 3 recommendations and to G.Sup43 temporary document.

The BEGIN\_VERIFY class is defined in [Section 13.8 of \[RFC4204\]](#). The following fields are extended: Encoding Type, Verify Transport Mechanism and Transmission Rate.

### [3.1.](#) Encoding Type

The Encoding Type identifies the type of encoding supported by the interface. LMP encoding type is consistent with the LSP encoding types defined for RSVP-TE [[RFC3471](#)]. In particular, the value to be used for G.709 hierarchy ODU and OTU signals is "Digital Wrapper".

### [3.2.](#) Verify Transport Mechanism

This field defines the transport mechanism for the Test messages and its scope depends on each encoding type. It is a 16 bit mask set by the local node where each bit identifies the various mechanisms it can support for LMP test messages transmission. This document defines the field values with respect to the G.709 digital encoding (they are expressed in network byte order).

- 0x01 OTUk TTI: 64 byte Test Message

Capability of transmitting Test messages using OTUk Trail Trace Identifier (TTI) overhead with frame length of 64 bytes. See ITU G.709 [Section 15.2](#) and [Section 15.7](#) for the structure and definition. The Test message is sent according to [[RFC4204](#)].

- 0x02 ODUk TTI: 64 byte Test Message

Capability of transmitting Test messages using ODUk Trail Trace Identifier (TTI) overhead with frame length of 64 bytes. See ITU G.709 [Section 15.2](#) and [Section 15.8](#) for the structure and definition. The Test message is sent according to [[RFC4204](#)].

- 0x04 GCC0: Test Message over the GCC0

Capability of transmitting Test messages using the OTUk Overhead General Communications Channel (GCC0). See ITU G.709 [Section 15.7](#) for the structure and definition. The Test message is sent according to [\[RFC4204\]](#) using bit-oriented HDLC framing format [\[RFC1662\]](#).

- 0x08 GCC1/2: Test Message over the GCC1/2

Capability of transmitting Test messages using the ODUk Overhead General Communications Channels (GCC1/2). See ITU G.709 [Section 15.8](#) for the structure and definition. The Test message is sent according to [\[RFC4204\]](#) using bit-oriented HDLC framing format [\[RFC1662\]](#).

- 0x10 OTUk TTI - Section Trace Correlation

Capability of transmitting OTUk Trail Trace Identifier (TTI) as defined in ITU-T G.709. The Test message is not transmitted using the OTUk TTI overhead bytes (i.e. data link), but is sent over the control channel and correlated for consistency to the received pattern. The correlation between the Interface\_Id and the in-band pattern is achieved using the TRACE Object as defined in [Section 4 of \[RFC4207\]](#). No modification to TestStatusSuccess or

TestStatusFailure messages is required.

- 0x20 ODUk TTI - Path Trace Correlation

Capability of transmitting ODUk Trail Trace Identifier (TTI) as defined in ITU-T G.709. The Test message is not transmitted using the OTUk TTI overhead bytes (i.e. data link), but is sent over the control channel and correlated for consistency to the received pattern. The correlation between the Interface\_Id the Test message is sent from and the pattern sent in-band is achieved using the TRACE Object as defined in [Section 4 of \[RFC4207\]](#). No modification to TestStatusSuccess or TestStatusFailure messages is required.

### [3.3](#). Transmission Rate

The transmission rate of the data links where the link verification procedure can be performed is defined into the TransmissionRate field of the BEGIN\_VERIFY class ([\[RFC4204\] Section 13.8](#)). Values are expressed in IEEE floating point format using a 32-bit number field and expressed in bytes per second. The following table defines the values to be used in OTNs:

Signal Type	Bit-rate (kbps)	Value (Bytes/Sec)
ODU0	1 244 160	0x4D1450C0
ODU1	2 498 775	0x4D94F048
OTU1	2 666 057	0x4D9EE8CD
ODU2	10 037 274	0x4E959129
OTU2	10 709 226	0x4E9F9475
ODU2e	10 399 525	0x4E9AF70A
ODU3	40 319 219	0x4F963367
OTU3	43 018 416	0x4FA0418F
ODU4	104 794 445	0x504331E3
OTU4	111 809 973	0x50504326

Transmission Rate values (Bytes/Sec)


#### 4. Trace Monitoring

[RFC4207] describes the set of trace monitoring procedures that allow a node to do trace monitoring by using the G.709 hierarchy capabilities.

This document defines a new C-Type of the TRACE Object class used for Trace Monitoring features as defined in [\[RFC4207\]](#).

#### 4.1. TRACE Object for evolutive OTN

The TRACE Object Class assigned by IANA is 21. A new C-Type is TBA and value 2 is suggested. The TRACE Object format is the same as defined in [RFC4207] and is shown in the following:

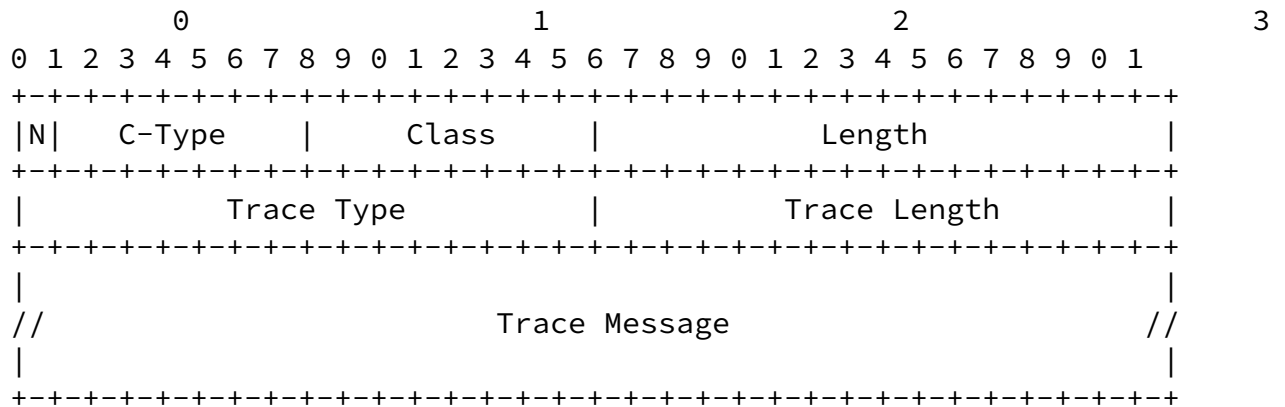

#### TRACE Object Class

Trace Type: 16 bits

The Trace Type field is used to identify the type of the trace message. The following values are defined and all other values are reserved and should be sent as zero and ignored on receipt.

- 1 = OTUk TTI
- 2 = ODUk TTI
- 3 = Level 1 ODUkT TTI
- 4 = Level 2 ODUkT TTI
- 5 = Level 3 ODUkT TTI
- 6 = Level 4 ODUkT TTI
- 7 = Level 5 ODUkT TTI
- 8 = Level 6 ODUkT TTI (default for layer adjacency discovery)

It shall be noted that an Amendment to ITU-T G.7714.1 has been



approved in September 2010 that defines an extension for OTN layer adjacency discovery based on the ODUk TCM function (ODUkT) providing 6 TCM levels. By default the TCM level 6 SHALL be used.

Trace Length: 16 bits

Expresses the length of the trace message in bytes (as specified by the Trace Type).

Trace Message:

This field includes the value of the expected message to be received in-band. The valid length and value combinations are determined by the ITU.T G.709 recommendation. The message MUST be padded with zeros to a 32-bit boundary, if necessary. Trace Length does not include padding zeroes.

This object is non negotiable.

#### 4.2. Discovery Response Message for Layer Adjacency Discovery

ITU-T Recommendation G.7714.1 [[ITUT-G.7714.1](#)] describes an automatic layer adjacency discovery procedure that can be applied to the ITU-T G.709 OTN technology. The discovery message can be sent to the adjacent node via the Trail Trace Identifier (TTI) and [Appendix III](#) of G.7714.1 describes how the discovery response message can be sent back to the originator of the discovery message (discovery agent in G.7714.1 terminology) using the LMP protocol.

As defined in [[ITUT-G.7714.1](#)], the TraceMonitor message [[RFC4207](#)] is used to convey the discovery response message. The following mapping table shows how the discovery response message attributes are mapped to TraceMonitor message objects or other fields of the LMP message (see G.7714.1, [section 11](#) for the description of the attributes):

G.7714.1 discovery response message attribute	TraceMonitor/LMP message field
<Received DA DCN ID>	<TRACE>: received discovery message
<Received TCP-ID>	<TRACE>: received discovery message
<Sent DA DCN ID>	IP source address in the IP header
<Sent Tx TCP-ID>	identical to <Sent Rx TCP-ID>
<Sent Rx TCP-ID>	<LOCAL_INTERFACE_ID>

The received TTI, more specifically the discovery message in the SAPI field contains the <Received DA DCN ID> and the <Received TCP-ID>. These attributes are included in the discovery response message by copying the received TTI into the <TRACE> field of the TraceMonitor message.

The IP address of the node sending the discovery response message corresponds to the <Sent DA DCN ID> and is the IP source address in the IP header of the LMP TraceMonitor message.

Typically, the Trail Connection Point (TCP-)IDs in transmit and receive direction are identical for OTN equipment, i.e., the <Sent Rx TCP-ID> is identical to the <Sent Tx TCP-ID>. The <Sent Rx TCP-ID> identifies the TCP on which the Discovery Message was received and corresponds to the <LOCAL\_INTERFACE\_ID> object in the TraceMonitor message.

## 5. LMP Behavior Negotiation update

This document also introduces an update to the BehaviorConfig C-Type defined in [LMP-NEG]. A new flag in the BehaviorConfig is needed for the indication of the support for OTN Test Messages:

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|S|D|C|O|               Must Be Zero (MBZ)               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
```

Internet-Draft

G709 Encoding for LMP Test Messages

July 2012

- 0: 1 bit

This bit indicates support for the TEST behavior of OTN technology-specific defined in this document

## [6.](#) Security Considerations

TBD

## [7.](#) Acknowledgements

The authors would like to thank Attila Takacs, Andras Kern, Sergio Belotti and Pietro Grandi for the kind review of the ID and the valuable comments provided.

## [8.](#) IANA Considerations

A new C-Type value for the Trace Object Class (21) is TBA by IANA.

## [9.](#) References

### [9.1.](#) Normative References

[ITUT-G.7714.1]

ITU-T, "Protocol for automatic discovery in SDH and OTN networks, G.7714.1 Recommendation", April 2003.

[RFC1662] Simpson, W., "PPP in HDLC-like Framing", STD 51, [RFC 1662](#), July 1994.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC3471] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#),

January 2003.

[RFC3945] Mannie, E., "Generalized Multi-Protocol Label Switching (GMPLS) Architecture", [RFC 3945](#), October 2004.

[RFC4204] Lang, J., "Link Management Protocol (LMP)", [RFC 4204](#), October 2005.

[RFC4207] Lang, J. and D. Papadimitriou, "Synchronous Optical

Ceccarelli, et al.

Expires January 13, 2013

[Page 10]

---

Internet-Draft

G709 Encoding for LMP Test Messages

July 2012

Network (SONET)/Synchronous Digital Hierarchy (SDH)  
Encoding for Link Management Protocol (LMP) Test  
Messages", [RFC 4207](#), October 2005.

## [9.2.](#) Informative References

[ITU-T-G.709]

ITU-T, "Interface for the Optical Transport Network (OTN)", G.709 Recommendation (and Amendment 1), February 2001.

## Authors' Addresses

Daniele Ceccarelli  
Ericsson  
Via E. Melen 77  
Genova - Sestri Ponente  
Italy

Email: [daniele.ceccarelli@ericsson.com](mailto:daniele.ceccarelli@ericsson.com)

Diego Caviglia  
Ericsson  
Via E. Melen 77  
Genova - Sestri Ponente  
Italy

Email: [diego.caviglia@ericsson.com](mailto:diego.caviglia@ericsson.com)

Francesco Fondelli  
Ericsson  
Via Moruzzi 1  
Pisa  
Italy

Email: francesco.fondelli@ericsson.com

Ceccarelli, et al.

Expires January 13, 2013

[Page 11]

---

Internet-Draft

G709 Encoding for LMP Test Messages

July 2012

Fatai Zhang  
Huawei Technologies  
F3-5-B R&D Center, Huawei Base  
Shenzhen 518129 P.R.China Bantian, Longgang District  
Phone: +86-755-28972912

Email: zhangfatai@huawei.com

Dan Li  
Huawei Technologies  
F3-5-B R&D Center, Huawei Base  
Shenzhen 518129 P.R.China Bantian, Longgang District  
Phone: +86-755-28973237

Email: danli@huawei.com

Dieter Beller  
Alcatel-Lucent  
Lorenzstrasse 10  
Stuttgart 70435  
Germany

Email: dieter.beller@alcatel-lucent.com

