

Network Working Group
Internet-Draft
Intended Status: Standards Track
Expires: May 29, 2014

J. Parello
B. Claise
Mouli Chandramouli
Cisco Systems, Inc.
November 29, 2013

Energy Object Context MIB
draft-ietf-eman-energy-aware-mib-11

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on May 29, 2014.

<Parello, Claise>

Expires May 29, 2014

[Page 1]

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Abstract

This document defines a subset of a Management Information Base (MIB) for energy management of devices. The module addresses device identification, context information, and the relationships between reporting devices, remote devices, and monitoring devices.

Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Table of Contents

1.	Introduction.....	3
1.1.	Energy Management Document Overview.....	3
2.	The Internet-Standard Management Framework.....	4
3.	Requirements and Use Cases.....	4
4.	Terminology.....	4
5.	Architecture Concepts Applied to the MIB Module.....	6
5.1	Energy Object Identification.....	8
5.2	Energy Object Context.....	9
5.3	Links to Other Identifiers.....	10
5.4	Energy Object Relationships.....	11
5.5	Energy Object Identity Persistence.....	12
6.	MIB Definitions.....	12

7.	Implementation Status.....	27
8.	Security Considerations.....	28
9.	IANA Considerations.....	29
10.	Acknowledgement.....	29
11.	References.....	30
11.1.	Normative References.....	30
11.2.	Informative References.....	31

[1.](#) Introduction

The EMAN standards provide a specification for Energy Management. This document defines a subset of a Management Information Base (MIB) for use with network management protocols for Energy monitoring of network devices and devices attached to the network and possibly extending to devices in the industrial automation setting with a network interface.

The focus of the MIB module specified in this document is on the identification of Energy Objects and reporting the context and relationships of Energy Objects as defined in [\[EMAN-FMWK\]](#). The module addresses Energy Object Identification, Energy Object Context, and Energy Object Relationships.

[1.1.](#) Energy Management Document Overview

This document specifies the Energy Object Context (ENERGY-OBJECT-CONTEXT-MIB) and IANA Energy Relationship (IANA-ENERGY-RELATION-MIB) modules. The Energy Object Context MIB module specifies MIB objects for identification of Energy Objects, and reporting context and relationship of an Energy Object. The IANA Energy Relationship MIB module specifies the first version of the IANA-maintained definitions of relationships between Energy Objects.

This document is based on the Energy Management Framework [\[EMAN-FMWK\]](#) and meets the requirements on identification of Energy Objects and their context and relationships as specified in the Energy Management requirements [\[RFC6988\]](#).

A second MIB module required by the [\[EMAN-FMWK\]](#), the Power and Energy Monitoring MIB [\[EMAN-MON-MIB\]](#), monitors the Energy Objects for Power States, for the Power and Energy consumption. Power State monitoring includes: retrieving Power States, Power State properties, current Power State, Power State transitions, and Power State statistics. In addition, this MIB module

<Parello, Claise>

Expires May 29, 2014

[Page 3]

provides the Power Characteristics properties of the Power and Energy, along with optional characteristics.

The applicability statement document [[EMAN-AS](#)] provides the list of use cases, and describes the common aspects of between existing Energy standards and the EMAN standard, and shows how the EMAN framework relates to other frameworks.

[2. The Internet-Standard Management Framework](#)

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [[RFC3410](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP). Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This memo specifies MIB modules that are compliant with SMIV2, which is described in STD 58, [RFC 2578](#) [[RFC2578](#)], STD 58, [RFC 2579](#) [[RFC2579](#)] and STD 58, [RFC 2580](#) [[RFC2580](#)].

[3. Requirements and Use Cases](#)

Firstly, to illustrate the importance of energy monitoring in networks and secondly to list some of the important areas to be addressed by the Energy Management Framework, several use cases and network scenarios are presented in the EMAN applicability statement document [[EMAN-AS](#)]. In addition, for each scenario, the target devices for energy management, and how those devices powered and metered are also presented. To address the network scenarios, requirements for power and energy monitoring for networking devices are specified in [[RFC6988](#)]. Based on the requirements [[RFC6988](#)], the [[EMAN-FMWK](#)] presents a solution approach.

Accordingly, the scope of the MIB modules in this document is in accordance to the requirements specified in [[RFC6988](#)] and the concepts from [[EMAN-FMWK](#)].

[4. Terminology](#)

<Parello, Claise>

Expires May 29, 2014

[Page 4]

Please refer to [[EMAN-FMWK](#)] for the definitions of the following terminology used in this draft:

Energy Management

Energy Management System (EnMS)

Energy Monitoring

Energy Control

electrical equipment

non-electrical equipment (mechanical equipment)

device

component

power inlet

power outlet

energy

power

demand

provide energy

receive energy

meter (energy meter)

battery

Power Interface

Nameplate Power

Power Attributes

Power Quality

Power State

Power State Set

5. Architecture Concepts Applied to the MIB Module

This section describes the basic concepts specified in the Energy Management Architecture [EMAN-FMWK], with specific information related to the MIB modules specified in this document.

The Energy Object Context (ENERGY-OBJECT-CONTEXT-MIB) MIB module in this document specifies MIB objects for identification of Energy Objects, and reporting context and relationship of an Energy Object. The managed objects are contained in two tables eoTable and eoRelationTable.

The first table eoTable focuses on link to the other MIB modules, context of the Energy Object. The second table eoRelationTable specifies the relationships between Energy Objects. This is a simplified representation of relationship between Energy Objects.

```

+- eoTable(2)
|
| +- eoEntry(1) [entPhysicalIndex]
| |
| | +--- r-n PethPsePortIndexOrZero          eoEthPortIndex(1)
| | +--- r-n PethPsePortGroupIndexOrZero     eoEthPortGrpIndex(2)
| | +--- r-n LldpPortNumberOrZero            eoLldpPortNumber(3)
| | +--- rwn MacAddress                      eoMgmtMacAddress(4)
| | +--- r-n InetAddressType                 eoMgmtAddressType(5)
| | +--- r-n InetAddress                     eoMgmtAddress(6)
| | +--- r-n SnmpAdminString                 eoMgmtDNSName(7)
| | +--- rwn SnmpAdminString                 eoDomainName(8)
| | +--- rwn SnmpAdminString                 eoRoleDescription(9)
| | +--- rwn EnergyObjectKeywordList         eoKeywords(10)
| | +--- rwn Integer32                       eoImportance(11)
| | +--- r-n INTEGER                         eoPowerCategory(12)
| | +--- rwn SnmpAdminString                 eoAlternateKey(13)
| | +--- r-n INTEGER                         eoPowerInterfaceType(14)
| | +- eoRelationTable(2)
| | |
| | | +- eoRelationEntry(1) [entPhysicalIndex,
eoRelationIndex]
| | | |
| | | | +--- --n Integer32                    eoRelationIndex(1)
| | | | +--- --n UUIDorZero                  eoRelationID(2)

```

<Parello, Claise>

Expires May 29, 2014


[Page 6]

```

|      | +-- rwn IANAEnergyRelationship
eoRelationship(3)

```

The following UML diagram illustrates the relationship of the MIB objects in the eoTable, eoRelationTable that describe the identity, context and relationship of an Energy Object.

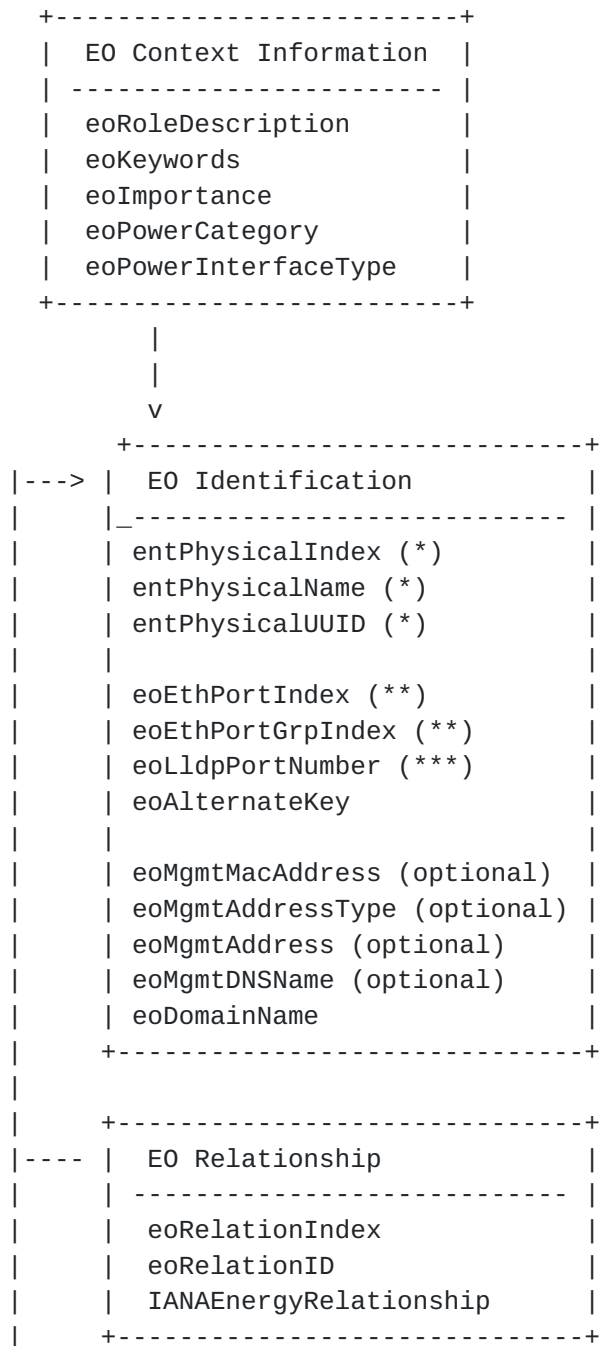

<Parello, Claise>

Expires May 29, 2014

[Page 7]

- (*) Compliance with the ENTITY MIB V4 [[RFC6933](#)]
- (**) Link with the Power over Ethernet MIB [[RFC3621](#)]
- (***) Link with LLDP MIBs [[LLDP-MIB](#)] [[LLDP-MED-MIB](#)]

Figure 1: MIB Objects Grouping

As displayed in figure 1, the MIB objects can be classified in different logical grouping of MIB objects.

- 1) The Energy Object Identification. See [Section 5.1](#) "Energy Object Identification". Devices and their sub-components are characterized by the power-related attributes of a physical entity present in the ENTITY MIB [[RFC6933](#)].
- 2) The Context Information. See [Section 5.2](#) "Energy Object Context"
- 3) The links to other MIB modules. See [Section 5.3](#) "Links to other Identifiers"
- 4) The Energy Object Relationships specific information. See [Section 5.4](#)
- 5) The Energy Object Identity Persistence. See [Section 5.5](#) "Energy Object Identity Persistence"

[5.1](#) Energy Object Identification

Refer to the "Energy Object Information" section in [[EMAN-FMWK](#)] for background information about Energy Objects.

Every Energy Object MUST implement the unique index, entPhysicalIndex, entPhysicalName and entPhysicalUUID from the ENTITY MIB [[RFC6933](#)]. Module Compliance with respect to entity4CRCompliance of ENTITY-MIB should be supported which require a limited number of objects supported (entPhysicalClass, entPhysicalName, entPhysicalUUID). entPhysicalIndex is used as index for the primary Energy Object information in the ENERGY-OBJECT-CONTEXT-MIB module.

Every Energy Object MUST have a printable name assigned to it. Energy Objects MUST implement the entPhysicalName object specified in the ENTITY-MIB [[RFC6933](#)], which must contain the Energy Object name.

<Parello, Claise>

Expires May 29, 2014

[Page 8]

For the ENERGY-OBJECT-CONTEXT-MIB compliance, every Energy Object instance MUST implement the entPhysicalUUID from the ENTITY MIB [[RFC6933](#)].

As displayed in [[RFC4122](#)], the following is an example of the string representation of a UUID as a URN: urn:uuid:f81d4fae-7dec-11d0-a765-00a0c91e6bf6.

For example, to understand the relationship between Energy Object Components and Energy Objects, the ENTITY-MIB physical containment tree [[RFC6933](#)] MUST be implemented.

A second example deals with one of the ENTITY-MIB extensions: if the Energy Object temperature is required, the managed objects from the ENTITY-SENSOR-MIB [[RFC3433](#)] should be supported.

Each Energy Object MUST belong to a single Energy Management Domain or in other words, an Energy Object cannot belong to more than one Energy Management Domain. Refer to the "Energy Management Domain" section in [[EMAN-FMWK](#)] for background information. The eoDomainName, which is an element of the eoTable, is a read-write MIB object. The Energy Management Domain should map 1-1 with a metered or sub-metered portion of the network. The Energy Management Domain MUST be configured on the Energy Object. The Energy Object MAY inherit the some of the domain parameters (possibly domain name, some of the context information such as role or keywords, importance) from the Energy Object or the Energy Management Domain MAY be configured directly in an Energy Object.

When an Energy Object acts as a Power Aggregator, the Energy Objects for which Power should be aggregated MUST be members of the same Energy Management Domain, specified by the eoDomainName MIB Object.

[5.2](#) Energy Object Context

Refer to the "Energy Object Context" section in [[EMAN-FMWK](#)] for background information.

An Energy Object must provide a value for eoImportance in the range of 1...100 to help differentiate the use or relative value of the device. The importance range is from 1 (least important) to 100 (most important). The default importance value is 1.

<Parello, Claise>

Expires May 29, 2014

[Page 9]

An Energy Object can provide a set of eoKeywords. These keywords are a list of tags that can be used for grouping and summary reporting within or between Energy Management Domains.

An Energy Object can have Power Interfaces and those interfaces can be classified as Power Inlet, Power Outlet or both.

An Energy Object can be classified based on the physical properties of the Energy Object. That Energy Object can be classified as consuming power or supplying power to other devices or that Energy Object can perform both of those functions and finally, an Energy Object can be a passive meter.

Additionally, an Energy Object can provide an eoRoleDescription string that indicates the purpose the Energy Object serves in the network.

5.3 Links to Other Identifiers

While the entPhysicalIndex is the primary index for all MIB objects in the ENERGY-OBJECT-CONTEXT-MIB module, the Energy Management Systems (EnMS) must be able to make the link with the identifier(s) in other supported MIB modules.

If the Energy Object is a Power over Ethernet (PoE) port, and if the Power over Ethernet MIB [[RFC3621](#)] is supported by the Energy Object SNMP agent, then the Energy Object eoethPortIndex and eoethPortGrpIndex MUST contain the values of pethPsePortIndex and pethPsePortGroupIndex [[RFC3621](#)].

The Energy Object eoLldpPortNumber MUST contain the lldpLocPortNum from the LLDP MIB [[LLDP-MIB](#)], if the LLDP-MED MIB is supported on the Energy Object SNMP agent.

The intent behind the links to the other MIB module identifier(s) is to correlate the instances in the different MIB modules. This will allow the ENERGY-OBJECT-CONTEXT-MIB module to reference other MIB modules in cases where the Power over Ethernet and the LLDP MIB modules are supported by the SNMP agent. Some use cases may not implement any of these two MIB modules for the Energy Objects. However, in situation where any of these two MIB modules are implemented, the EnMS must be able to correlate the instances in the different MIB modules.

The eoAlternateKey alternate key object specifies a manufacturer defined string that can be used to identify the Energy Object. Since an EnMS may need to correlate objects across management

<Parello, Claise>

Expires May 29, 2014

[Page 10]

systems, this alternate key is provided to facilitate such a link. This optional value is intended as a foreign key or alternate identifier for a manufacturer or EnMS to use to correlate the unique Energy Object Id in other systems or namespaces. If an alternate key is not available or is not applicable then the value is the zero-length string.

5.4 Energy Object Relationships

Refer to the "Energy Object Relationships" section in [EMAN-FMWK] for the definition and background information. In order to link two Energy Objects a separate table (eoRelationTable) has been introduced in this MIB module. The following relationships between Energy objects have been considered in the eoRelationTable.

Metering Relationship -> meteredBy / metering

Power Source Relationship -> poweredBy / powering

Aggregation Relationship -> aggregatedBy / aggregating

Each Energy object can have one or more Energy Object relationships with other Energy Objects. The relations between Energy Objects are specified in eoRelationTable. The relationship between the Energy Objects is specified with an arbitrary index and the UUID of the remote Energy Object. The UUID MUST comply to the [RFC 4122](#) specifications. It is important to note that it is possible that an Energy Object may not have an Energy Object relationship with other Energy Objects.

The IANA Energy Relationship MIB module specifies the first version of the IANA-maintained definitions of relationships between Energy Objects, as textual conventions. This way, for Energy Relationships, new textual conventions can be specified, without updating the primary Energy Object Context MIB module.

Since the communication between the Energy Objects may not be SNMP and is left to the choice of the device manufacturer, an Energy Object can have additional MIB objects that can be used for easier identification by the EnMS. The optional objects eoMgmtMacAddress, eoMgmtAddressType eoMgmtDNSName can be used to help identify the relationship between the Energy Objects and other NMS objects. These objects can be used as an alternate

<Parello, Claise>

Expires May 29, 2014

[Page 11]

key to help link the Energy Object with other keyed information that may be stored within the EnMS(s). For the optional objects that may not be included in some vendor implementations, the expected behavior when those objects are polled is a response noSuchInstance.

5.5 Energy Object Identity Persistence

In some situations, the Energy Object identity information should be persistent even after a device reload. For example, in a static setup where a switch monitors a series of connected PoE phones, there is a clear benefit for the EnMS if the Energy Object Identification and all associated information persist, as it saves a network discovery. However, in other situations, such as a wireless access point monitoring the mobile user PCs, there is not much advantage to persist the Energy Object Information. The identity information of an Energy Object should be persisted and there is value in the writable MIB objects persisted.

6. MIB Definitions

```
-- *****
--
--
-- This MIB is used for describing the identity and the
-- context information of Energy Objects in network
--
--
-- *****
```

ENERGY-OBJECT-CONTEXT-MIB DEFINITIONS ::= BEGIN

IMPORTS

```
    MODULE-IDENTITY,
    OBJECT-TYPE,
    mib-2,
    Integer32
        FROM SNMPv2-SMI
    TEXTUAL-CONVENTION, MacAddress, TruthValue
        FROM SNMPv2-TC
    MODULE-COMPLIANCE,
    OBJECT-GROUP
```

<Parello, Claise>

Expires May 29, 2014

[Page 12]

FROM SNMPv2-CONF
SnmAdminString
FROM SNMP-FRAMEWORK-MIB
InetAddressType, InetAddress
FROM INET-ADDRESS-MIB
entPhysicalIndex
FROM ENTITY-MIB
UUIDorZero
FROM UUID-TC-MIB
IANAEnergyRelationship
FROM IANA-ENERGY-RELATION-MIB;

energyAwareMIB MODULE-IDENTITY

LAST-UPDATED "201311290000Z"

ORGANIZATION "IETF EMAN Working Group"

CONTACT-INFO

"WG Charter:

<http://datatracker.ietf.org/wg/eman/charter/>

Mailing Lists:

General Discussion: eman@ietf.org

To Subscribe: <https://www.ietf.org/mailman/listinfo/eman>

Archive: <http://www.ietf.org/mail-archive/web/eman>

Editors:

John Parello
Cisco Systems, Inc.
3550 Cisco Way
San Jose, California 95134
US
Phone: +1 408 525 2339
Email: jparello@cisco.com

Benoit Claise
Cisco Systems, Inc.
De Kleetlaan 6a b1
Degem 1831
Belgium
Phone: +32 2 704 5622
Email: bclaise@cisco.com

Mouli Chandramouli

Cisco Systems, Inc.
Sarjapur Outer Ring Road
Bangalore 560103
IN
Phone: +91 80 4429 2409
Email: moulchan@cisco.com"

DESCRIPTION

"This MIB is used for describing the identity and the
context information of Energy Objects"

REVISION

"201311290000Z"

DESCRIPTION

"Initial version, published as RFC XXXX."

::= { energyMIB 1 }

energyAwareMIBNotifs OBJECT IDENTIFIER

::= { energyAwareMIB 0 }

energyAwareMIBObjects OBJECT IDENTIFIER

::= { energyAwareMIB 1 }

energyAwareMIBConform OBJECT IDENTIFIER

::= { energyAwareMIB 2 }

-- Textual Conventions

PethPsePortIndexOrZero ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"This textual convention is an extension of the
pethPsePortIndex convention, which defines a greater than
zero value used to identify a power Ethernet PSE port.
This extension permits the additional value of zero. The
semantics of the value zero are object-specific and must,
therefore, be defined as part of the description of any
object that uses this syntax. Examples of the usage of
this extension are situations where none or all physical
entities need to be referenced."

SYNTAX Integer32 (0..2147483647)

PethPsePortGroupIndexOrZero ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"This textual convention is an extension of the pethPsePortGroupIndex convention from the Power Over Ethernet MIB [[RFC3621](#)], which defines a greater than zero value used to identify group containing the port to which a power Ethernet PSE is connected. This extension permits the additional value of zero. The semantics of the value zero are object-specific and must, therefore, be defined as part of the description of any object that uses this syntax. Examples of the usage of this extension are situations where none or all physical entities need to be referenced."

SYNTAX Integer32 (0..2147483647)

LldpPortNumberOrZero ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"This textual convention is an extension of the LldpPortNumber convention specified in the LLDP MIB, which defines a greater than zero value used to uniquely identify each port contained in the chassis (that is known to the LLDP agent) by a port number. This extension permits the additional value of zero. The semantics of the value zero are object-specific and must, therefore, be defined as part of the description of any object that uses this syntax. Examples of the usage of this extension are situations where none or all physical entities need to be referenced."

SYNTAX Integer32(0..4096)

EnergyObjectKeywordList ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"A list of keywords that can be used to group Energy Objects for reporting or searching. If multiple keywords are present, then this string will contain all the keywords separated by the ',' character. All alphanumeric

characters and symbols (other than a comma), such as #, (, \$, !, and &, are allowed. White spaces before and after the commas are ignored, as well as within a keyword itself.

For example, if an Energy Object were to be tagged with the keyword values 'hospitality' and 'guest', then the keyword list will be 'hospitality,guest'."

SYNTAX OCTET STRING (SIZE (0..2048))

-- Objects

eoTable OBJECT-TYPE

SYNTAX SEQUENCE OF EoEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "This table lists Energy Objects."
 ::= { energyAwareMIBObjects 1 }

eoEntry OBJECT-TYPE

SYNTAX EoEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "An entry describes the attributes of an Energy Object. Whenever a new Energy Object is added or an existing Energy Object is deleted, a row in the eoTable is added or deleted."

INDEX {entPhysicalIndex }
 ::= { eoTable 1 }

EoEntry ::= SEQUENCE {
 eoEthPortIndex PethPsePortIndexOrZero,
 eoEthPortGrpIndex PethPsePortGroupIndexOrZero,
 eoLldpPortNumber LldpPortNumberOrZero,
 eoMgmtMacAddress MacAddress,
 eoMgmtAddressType InetAddressType,
 eoMgmtAddress InetAddress,
 eoMgmtDNSName SnmpAdminString,
 eoDomainName SnmpAdminString,
 eoRoleDescription SnmpAdminString,
 eoKeywords EnergyObjectKeywordList,
 eoImportance Integer32,
 eoPowerCategory INTEGER,

```

        eoAlternateKey          SnmpAdminString,
        eoPowerInterfaceType    INTEGER
    }

```

```

eoEthPortIndex    OBJECT-TYPE
    SYNTAX          PethPsePortIndexOrZero
    MAX-ACCESS      read-only
    STATUS           current
    DESCRIPTION
        "This variable uniquely identifies the power Ethernet
        port to which the attached device is connected [RFC3621].
        In addition, PoE MIB should be instantiated on the
        device. If such a power Ethernet port cannot be specified
        or is not known then the object is zero."
    ::= { eoEntry 1 }

```

```

eoEthPortGrpIndex    OBJECT-TYPE
    SYNTAX          PethPsePortGroupIndexOrZero
    MAX-ACCESS      read-only
    STATUS           current
    DESCRIPTION
        "This variable uniquely identifies the group containing
        the port to which a power Ethernet PSE is connected
        [RFC3621]. In addition, PoE MIB should be instantiated on
        the device. If such a group cannot be specified or is not
        known then the object is zero."
    ::= { eoEntry 2 }

```

```

eoLldpPortNumber    OBJECT-TYPE
    SYNTAX          LldpPortNumberOrZero
    MAX-ACCESS      read-only
    STATUS           current
    DESCRIPTION
        "This variable uniquely identifies the port component
        (contained in the local chassis with the LLDP agent) as
        defined by the lldpLocPortNum in the [LLDP-MIB] and
        [LLDP-MED-MIB]. In addition, LLDP MIB should be
        instantiated on the device If such a port number cannot
        be specified or is not known then the object is zero."
    ::= { eoEntry 3 }

```

```

eoMgmtMacAddress    OBJECT-TYPE
    SYNTAX          MacAddress
    MAX-ACCESS      read-only
    STATUS           current
    DESCRIPTION
        "This object specifies a MAC address of the Energy
        Object."

```

<Parello, Claise>

Expires May 29, 2014

[Page 17]

```
::= { eoEntry 4 }
```

eoMgmtAddressType OBJECT-TYPE

SYNTAX InetAddressType

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the eoMgmtAddress type, i.e. an IPv4 address or an IPv6 address. This object MUST be populated when eoMgmtAddress is populated."

```
::= { eoEntry 5 }
```

eoMgmtAddress OBJECT-TYPE

SYNTAX InetAddress

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the management address as an IPv4 address or IPv6 address of Energy Object. The IP address type, i.e. IPv4 or IPv6, is determined by the eoMgmtAddressType value. This object can be used as an alternate key to help link the Energy Object with other keyed information that may be stored within the EnMS(s)."

```
::= { eoEntry 6 }
```

eoMgmtDNSName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the DNS name of the eoMgmtAddress. This object can be used as an alternate key to help link the Energy Object with other keyed information that may be stored within the EnMS(s)."

```
::= { eoEntry 7 }
```

eoDomainName OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object specifies the name of an Energy Management Domain for the Energy Object. This object specifies a zero-length string value if no Energy Management Domain name is configured. The value of eoDomainName must remain constant at least from one re-initialization of the entity local management system to the next re-initialization."

<Parello, Claise>

Expires May 29, 2014

[Page 18]

```
::= { eoEntry 8 }
```

eoRoleDescription OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object specifies an administratively assigned name to indicate the purpose an Energy Object serves in the network.

For example, we can have a phone deployed to a lobby with eoRoleDescription as 'Lobby phone'.

This object specifies the value is the zero-length string value if no role description is configured.

The value of eoRoleDescription must remain constant at least from one re-initialization of the entity local management system to the next re-initialization. "

```
::= { eoEntry 9 }
```

eoKeywords OBJECT-TYPE

SYNTAX EnergyObjectKeywordList

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object specifies a list of keywords that can be used to group Energy Objects for reporting or searching. The value is the zero-length string if no keywords have been configured. If multiple keywords are present, then this string will contain all the keywords separated by the ',' character. For example, if an Energy Object were to be tagged with the keyword values 'hospitality' and 'guest', then the keyword list will be 'hospitality,guest'.

If write access is implemented and a value is written into the instance, the agent must retain the supplied value in the eoKeywords instance associated with the same physical entity for as long as that entity remains instantiated. This includes instantiations across all re-initializations/reboots of the local management agent. "

```
::= { eoEntry 10 }
```

eoImportance OBJECT-TYPE

SYNTAX Integer32 (1..100)

MAX-ACCESS read-write

<Parello, Claise>

Expires May 29, 2014

[Page 19]

STATUS current

DESCRIPTION

"This object specifies a ranking of how important the Energy Object is (on a scale of 1 to 100) compared with other Energy Objects in the same Energy Management Domain. The ranking should provide a business or operational context for the Energy Object as compared to other similar Energy Objects. This ranking could be used as input for policy-based network management.

Although network managers must establish their own ranking, the following is a broad recommendation:

90 to 100 Emergency response
 80 to 90 Executive or business critical
 70 to 79 General or Average
 60 to 69 Staff or support
 40 to 59 Public or guest
 1 to 39 Decorative or hospitality

The value of eoImportance must remain constant at least from one re-initialization of the entity local management system to the next re-initialization. "

DEFVAL { 1 }

::= { eoEntry 11 }

eoPowerCategory OBJECT-TYPE

SYNTAX INTEGER {
 consumer(0),
 producer(1),
 meter(2),
 distributor(3),
 store(4)
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object describes the Energy Object category, which indicates the expected behavior or physical property of the Energy Object, based on its design. An Energy Object can be a consumer(0), producer(1), meter(2), distributor(3) or store(4).

In some cases, a meter is required to measure the power consumption. In such a case, this meter Energy Object category is meter(2). If a device is functioning as a distributor of Energy that category of the Energy Object

<Parello, Claise>

Expires May 29, 2014

[Page 20]

is distributor (3). If a device is a store of electric Energy the category of the device can be store (4). "

```
::= { eoEntry 12 }
```

eoAlternateKey OBJECT-TYPE

SYNTAX SnmpAdminString
 MAX-ACCESS read-write
 STATUS current

DESCRIPTION

"This object specifies a manufacturer defined string that can be used to identify the Energy Object. Since Energy Management Systems (EnMS) and Network Management Systems (NMS) may need to correlate objects across management systems, this alternate key is provided to provide such a link. This optional value is intended as a foreign key or alternate identifier for a manufacturer or EnMS/NMS to use to correlate the unique Energy Object Id in other systems or namespaces. If an alternate key is not available or is not applicable then the value is the zero-length string.

The value of eoAlternateKey must remain constant at least from one re-initialization of the entity local management system to the next re-initialization. "

```
::= { eoEntry 13 }
```

eoPowerInterfaceType OBJECT-TYPE

SYNTAX INTEGER {
 inlet(0),
 outlet(1),
 both(2)
 }

MAX-ACCESS read-only
 STATUS current

DESCRIPTION

"This object describes the Power Interface for an Energy Object. A Power Interface is an interface at which a Energy Object is connected to a power transmission medium, at which it can in turn receive power, provide power, or both. A Power Interface type can be an inlet(0) or outlet(1) or both(2), respectively."

```
::= { eoEntry 14 }
```

eoRelationTable OBJECT-TYPE

SYNTAX SEQUENCE OF EoRelationEntry
 MAX-ACCESS not-accessible
 STATUS current

DESCRIPTION

<Parello, Claise>

Expires May 29, 2014

[Page 21]

"This table describes the relationships between Energy Objects."

::= { energyAwareMIBObjects 2 }

eoRelationEntry OBJECT-TYPE

SYNTAX EoRelationEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in this table describes the relationship between Energy objects."

INDEX { entPhysicalIndex, eoRelationIndex }

::= { eoRelationTable 1 }

EoRelationEntry ::= SEQUENCE {

eoRelationIndex Integer32,

eoRelationID UUIDorZero,

eoRelationship IANAEnergyRelationship

}

eoRelationIndex OBJECT-TYPE

SYNTAX Integer32 (0..2147483647)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object is an arbitrary index to identify the Energy Object related to another Energy Object"

::= { eoRelationEntry 1 }

eoRelationID OBJECT-TYPE

SYNTAX UUIDorZero

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the Universally Unique Identifier (UUID) of the peer (other) Energy Object. The UUID must comply the specifications of UUID in UUID-TC-MIB.

If UUID of the energy object is unknown or non-existent, the eoRelationID will be set to a zero-length string instead."

REFERENCE

"[RFC 6933](#), Entity MIB - version 4, May 2013 "

::= { eoRelationEntry 2 }

```

eoRelationship      OBJECT-TYPE
    SYNTAX            IANAEnergyRelationship
    MAX-ACCESS        read-write
    STATUS            current
    DESCRIPTION
        "This object describes the relations between Energy
        objects. For each Energy object, the relations between
        the other Energy objects are specified using the bitmap."
    ::= { eoRelationEntry 3 }

-- Conformance

energyAwareMIBCompliances OBJECT IDENTIFIER
    ::= { energyAwareMIBConform 1 }

energyAwareMIBGroups OBJECT IDENTIFIER
    ::= { energyAwareMIBConform 2 }

energyAwareMIBFullCompliance MODULE-COMPLIANCE
    STATUS            current
    DESCRIPTION
        "When this MIB is implemented with support for
        read-write, then such an implementation can
        claim full compliance. Such devices can then
        be both monitored and configured with this MIB."

    MODULE            -- this module
    MANDATORY-GROUPS {
        energyAwareMIBTableGroup,
        energyAwareRelationTableGroup
    }

    GROUP            energyAwareOptionalMIBTableGroup
    DESCRIPTION
        "A compliant implementation does not have to
        implement. Module Compliance of ENTITY-MIB
        with respect to entity4CRCompliance should
        be supported. "
    ::= { energyAwareMIBCompliances 1 }

energyAwareMIBReadOnlyCompliance MODULE-COMPLIANCE
    STATUS            current
    DESCRIPTION
        "When this MIB is implemented without support for
        read-write (i.e. in read-only mode), then such an
        implementation can claim read-only compliance.

```

<Parello, Claise>

Expires May 29, 2014

[Page 23]

Such a device can then be monitored but cannot be Configured with this MIB.

Module Compliance of ENTITY-MIB with respect to entity4CRCompliance should be supported."

MODULE -- this module

```
MANDATORY-GROUPS {
    energyAwareMIBTableGroup,
    energyAwareRelationTableGroup
}
```

GROUP energyAwareOptionalMIBTableGroup

DESCRIPTION

"A compliant implementation does not have to implement the managed objects in this GROUP.

Module Compliance of ENTITY-MIB with respect to entity4CRCompliance should be supported. "

::= { energyAwareMIBCompliances 2 }

-- Units of Conformance

energyAwareMIBTableGroup OBJECT-GROUP

```
OBJECTS {
    eoDomainName,
    eoRoleDescription,
    eoAlternateKey,
    eoKeywords,
    eoImportance,
    eoPowerCategory,
    eoPowerInterfaceType
}
```

STATUS current

DESCRIPTION

"This group contains the collection of all the objects related to the EnergyObject.

Module Compliance of ENTITY-MIB with respect to entity4CRCompliance should be supported. "

::= { energyAwareMIBGroups 1 }

energyAwareOptionalMIBTableGroup OBJECT-GROUP

```
OBJECTS {
    eoEthPortIndex,
    eoEthPortGrpIndex,
    eoLldpPortNumber,
    eoMgmtMacAddress,
    eoMgmtAddressType,
```


<Parello, Claise>

Expires May 29, 2014

[Page 24]

```

        eoMgmtAddress,
        eoMgmtDNSName
    }
STATUS          current
DESCRIPTION
    "This group contains the collection of all the objects
    related to the Energy Object."
 ::= { energyAwareMIBGroups 2 }

energyAwareRelationTableGroup OBJECT-GROUP
    OBJECTS
        {
            -- Note that object eoRelationIndex is not
            -- included since it is not-accessible

            eoRelationID,
            eoRelationship
        }
    STATUS          current
    DESCRIPTION
        "This group contains the collection of all objects
        specifying the relationship between Energy Objects."
 ::= { energyAwareMIBGroups 3 }

END

IANA-ENERGY-RELATION-MIB DEFINITIONS ::= BEGIN
    IMPORTS
        MODULE-IDENTITY, mib-2
            FROM SNMPv2-SMI
        TEXTUAL-CONVENTION
            FROM SNMPv2-TC;

    ianaEnergyRelationMIB MODULE-IDENTITY
        LAST-UPDATED "201306300000Z" -- June 30, 2013
        ORGANIZATION "IANA"
        CONTACT-INFO "
            Internet Assigned Numbers Authority
            Postal: ICANN
            4676 Admiralty Way, Suite 330
            Marina del Rey, CA 90292
            Tel: +1-310-823-9358
            EMail: iana@iana.org"

        DESCRIPTION
            "This MIB module defines a TEXTUAL-CONVENTION that
            describes the relationships between Energy Objects.
```

<Parello, Claise>

Expires May 29, 2014

[Page 25]

Copyright (C) The IETF Trust (2013).

The initial version of this MIB module was published in RFC yyyy; for full legal notices see the RFC itself. Supplementary information may be available at <http://www.ietf.org/copyrights/ianamib.html>"

REVISION "201306300000Z" -- June 30, 2013
DESCRIPTION "Initial version of this MIB as published in RFC yyyy."
::= { energyMIB 2 }

-- RFC Editor, please replace xxx with the IANA allocation
-- for this MIB module and yyyy with the number of the
-- approved RFC

-- Textual Conventions

IANAEnergyRelationship ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An enumerated value specifies the type of relationship between Energy Objects.

The enumeration 'poweredBy' is applicable if the Energy Object A is poweredBy Energy Object B.

The enumeration 'powering' is applicable if the Energy Object A is powering Energy Object B.

The enumeration 'meteredBy' is applicable if the Energy Object A is meteredBy Energy Object B.

The enumeration 'metering' is applicable if the Energy Object A is metering Energy Object B.

The enumeration 'aggregatedBy' is applicable if the Energy Object A is aggregatedBy Energy Object B.

The enumeration 'aggregating' is applicable if the Energy Object A is aggregating Energy Object B."

SYNTAX INTEGER {
poweredBy(1), -- power relationship
powering(2),

<Parello, Claise>

Expires May 29, 2014

[Page 26]

```
meteredBy(3), -- meter relationship
metering(4),
aggregatedBy(5), -- aggregation relationship
aggregating(6)
}
```

END

7. Implementation Status

[Note to RFC Editor: Please remove this section and the reference to [\[RFC6982\]](#) before publication.]

This section records the status of known implementations of the EMAN-Monitoring MIB at the time of posting of this Internet-Draft, and is based on a proposal described in [\[RFC6982\]](#).

The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs.

11.1 SNMP Research

Organization: SNMP Research, Inc.

Maturity: Prototype based upon early drafts of the MIBs.
We anticipate updating it to more recent documents as development schedules allow.

Coverage: Code was generated to implement all MIB objects in ENTITY-MIB (Version 4), ENERGY-OBJECT-CONTEXT-MIB, ENERGY-OBJECT-MIB, POWER-CHARACTERISTICS-MIB, and BATTERY-MIB.

Implementation experience: The documents are implementable.

Comments: Technical comments about the ENERGY-OBJECT-CONTEXT-MIB, ENERGY-OBJECT-MIB, and BATTERY-MIB were submitted to the EMAN Working Group E-mail list.

Licensing: Proprietary, royalty licensing

<Parello, Claise>

Expires May 29, 2014

[Page 27]

Contact: Alan Luchuk, luchuk at snmp.com

URL: <http://www.snmp.com/>

11.2 Python

Priyanka Rao mentioned on the mailing list (<http://www.ietf.org/mail-archive/web/eman/current/msg02063.html>) that she has got an python implementation.

8. Security Considerations

Some of the readable objects in these MIB modules (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP.

There are a number of management objects defined in these MIB modules with a MAX-ACCESS clause of read-write and/or read-create. Such objects MAY be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations. The following are the tables and objects and their sensitivity/vulnerability:

- . Unauthorized changes to the eoDomainName, entPhysicalName, eoRoleDescription, eoKeywords, and/or eoImportance MAY disrupt power and energy collection, and therefore any predefined policies defined in the network.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example, by using IPsec), there is still no secure control over who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in these MIB modules.

It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework (see [\[RFC3410\]](#), [section 8](#)), including full support for the SNMPv3 cryptographic mechanisms (for authentication and privacy).

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of these MIB modules is properly configured to give access to the objects only to those principals (users) that have legitimate rights to GET or SET (change/create/delete) them.

9. IANA Considerations

The MIB modules in this document uses the following IANA-assigned OBJECT IDENTIFIER values recorded in the SMI Numbers registry:

Descriptor	OBJECT IDENTIFIER value
-----	-----
energyMIB	{ mib-2 xxx }

Additions to the ENERGY-OBJECT-CONTEXT-MIB module are subject to Expert Review [[RFC5226](#)], i.e., review by one of a group of experts designated by an IETF Area Director. The group of experts MUST check the requested MIB objects for completeness and accuracy of the description. Requests for MIB objects that duplicate the functionality of existing objects SHOULD be declined. The smallest available OID SHOULD be assigned to new MIB objects. The specification of new MIB objects SHOULD follow the structure specified in [Section 6](#) and MUST be published using a well-established and persistent publication medium.

This document defines the first version of the IANA-maintained IANA-ENERGY-RELATION-MIB module, which allows new definitions of relationships between Energy Objects. A Specification Required as defined in [RFC 5226](#) [[RFC5226](#)], is REQUIRED for each modification of the energy relationships.

10. Acknowledgement

We would like to thank Juergen Quittek and Juergen Schoenwalder for their suggestions on the new design of eoRelationTable which was a proposed solution for the open issue on the representation of Energy Object as a UUIDlist.

Many thanks to Juergen Quittek for many comments on the wording, text and design of the MIB thus resulting in an improved draft.

<Parello, Claise>

Expires May 29, 2014

[Page 29]

Many thanks to Alan Luchuk for the review of the MIB and his comments.

In addition the authors thank Bill Mielke for his multiple reviews, Brad Schoening and Juergen Schoenwaelder for their suggestions and Michael Brown for dramatically improving this draft.

11. References

11.1. Normative References

- [RFC2119] S. Bradner, Key words for use in RFCs to Indicate Requirement Levels, [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2578] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Structure of Management Information Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.
- [RFC2579] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Textual Conventions for SMIv2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIv2", STD 58, [RFC 2580](#), April 1999.
- [RFC3621] Berger, A., and D. Romascanu, "Power Ethernet MIB", [RFC3621](#), December 2003.
- [RFC4122] Leach, P., Mealling, M., and R. Salz, "A Universally Unique IDentifier (UUID) URN Namespace ", [RFC 4122](#), July 2005.
- [RFC6933] Bierman, A. Romascanu, D. Quittek, J. and M. Chandramouli, "Entity MIB (Version 4)", [RFC 6933](#), May 2013.
- [LLDP-MIB] IEEE 802.1AB-2005, "Management Information Base module for LLDP configuration, statistics, local system data and remote systems data components", May 2005.

[LLDP-MED-MIB] ANSI/TIA-1057, "The LLDP Management Information Base extension module for TIA-TR41.4 media endpoint discovery information", July 2005.

[EMAN-MON-MIB] M. Chandramouli, Schoening, B., Quittek, J., Dietz, T., and B. Claise "Power and Energy Monitoring MIB", [draft-ietf-eman-energy-monitoring-mib-07](#), October 2013.

11.2. Informative References

[RFC3410] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction and Applicability Statements for Internet Standard Management Framework", [RFC 3410](#), December 2002.

[RFC3433] Bierman, A., Romascanu, D., and K.C. Norseth, "Entity Sensor Management Information Base", [RFC 3433](#), December 2002.

[RFC5226] Narten, T. Alverstrand, H., A. and K. McCloghrie, "Guidelines for Writing an IANA Considerations Section in RFCs ", [BCP 26](#), [RFC 5226](#), May 2008.

[RFC6988] Quittek, J., Winter, R., Dietz, T., Claise, B., and M. Chandramouli, "Requirements for Energy Management", [RFC 6988](#), September 2013.

[EMAN-FMWK] Claise, B., Parelllo, J., Schoening, B., and J. Quittek, "Energy Management Framework", [draft-ietf-eman-framework-11](#), work in progress, November 2013.

[EMAN-AS] Schoening, B., Chandramouli, M., and B. Nordman, "Energy Management (EMAN) Applicability Statement", [draft-ietf-eman-applicability-statement-04.txt](#), work in progress, October 2013.

[RFC6982] Sheffer, Y. and A. Farrel, "Improving Awareness of Running Code: The Implementation Status Section", [RFC 6982](#), July 2013.

Authors' Addresses

Benoit Claise
Cisco Systems, Inc.
De Kleetlaan 6a b1

Diegem 1813
BE

<Parello, Claise>

Expires May 29, 2014

[Page 31]

Phone: +32 2 704 5622
Email: bclaise@cisco.com

John Parello
Cisco Systems, Inc.
3550 Cisco Way
San Jose, California 95134
US

Phone: +1 408 525 2339
Email: jparello@cisco.com

Mouli Chandramouli
Cisco Systems, Inc.
Sarjapur Outer Ring Road
Bangalore 560103
IN

Phone: +91 80 4429 2409
Email: moulchan@cisco.com