

I2RS working group  
Internet-Draft  
Intended status: Standards Track  
Expires: September 14, 2017

S. Hares  
Huawei  
S. Kini  
Ericsson  
L. Dunbar  
Huawei  
R. Krishnan  
Dell  
D. Bogdanovic  
Juniper Networks  
R. White  
Linkedin  
March 13, 2017

**Filter-Based RIB Data Model**  
**draft-ietf-i2rs-fb-rib-data-model-01**

Abstract

This document defines a data model to support the Filter-based Routing Information Base (RIB) Yang data models. A routing system uses the Filter-based RIB to program FIB entries that process incoming packets by matching on multiple fields within the packet and then performing a specified action on it. The FB-RIB can also specify an action to forward the packet according to the FIB entries programmed using the RIBs of its routing instance.

The Filter based RIB is a protocol independent data structure which can be deployed in a configuration datastore, an ephemeral control plane data store.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 14, 2017.

## Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">1.1.</a>	Definition of Filter Based RIB . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Requirements Language . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Definitions and Acronyms . . . . .	<a href="#">4</a>
<a href="#">4.</a>	High level Yang structure for the FB-RIB . . . . .	<a href="#">5</a>
<a href="#">4.1.</a>	Top Level Yang Structure for ietf-fb-rib . . . . .	<a href="#">7</a>
<a href="#">4.2.</a>	Filter-Based RIB structures . . . . .	<a href="#">8</a>
<a href="#">5.</a>	yang models . . . . .	<a href="#">9</a>
<a href="#">5.1.</a>	Filter-Based RIB types . . . . .	<a href="#">9</a>
<a href="#">5.2.</a>	FB-RIB . . . . .	<a href="#">16</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">18</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">19</a>
<a href="#">8.</a>	References . . . . .	<a href="#">19</a>
<a href="#">8.1.</a>	Normative References: . . . . .	<a href="#">19</a>
<a href="#">8.2.</a>	Informative References . . . . .	<a href="#">19</a>
	Authors' Addresses . . . . .	<a href="#">20</a>

## [1.](#) Introduction

This document provides a protocol-independent yang module for Filter Based Routing (FB-RIB) routing filters within a routing element. The informational model for this FB-RIB is in [\[I-D.ietf-i2rs-fb-rib-info-model\]](#).

### [1.1.](#) Definition of Filter Based RIB

Filter-based routing is a technique used to make packet forwarding decisions based on a filter that is matched to the incoming packets and the specified action. It should be noted that that this is distinct from the static routes in the RIB where the routing is destination address based.



A Filter-Based RIB (Routing Information Base) is contained in a routing instance. It contains a list of filters (match-action conditions) and a list of interfaces the filter-based forwarding operates on, and default RIB(s).

A Filter Based RIB uses packet forwarding policy. If packet reception is considered an event, then the Filter-based RIB uses a minimalistic Event-matchCondition-Action policy with the following characteristics:

event = packet/frame received,

match condition - match on field in frame/packet or circumstances relating to packet reception (e.g. time received),

action - modify packet and forward/drop packet.

A Filter-based RIB entry specifies match filters for the fields in a packet (which may include layer 1 to layer 3 header fields, transport or application fields) or size of the packet or interface received on. The matches are contained in an ordered list of filters which contain pairs of match condition-action (aka event-condition-action).

If all matches fail, default action is to forward the packet using Destination Based forward from the default RIB(s). The default RIBs can be:

- o created by the I2RS Routing Information Base (RIB) manager using the yang model described in: in [[I-D.ietf-i2rs-rib-info-model](#)], or
- o configured RIB created using static routes or [[I-D.ietf-netmod-routing-cfg](#)].

Actions in the condition-action pair may impact forwarding or set something in the packet that will impact forwarding. Policy actions are typically applied before applying QoS constraints since policy actions may override QoS constraint.

The Filter-Based RIB can reside in the configuration datastore, a control plane datastore, or an ephemeral control plane data store (e.g. I2RS ephemeral control plane datastore).

The Interface to the Routing System (I2RS) [[RFC7921](#)] architecture provides dynamic read and write access to the information and state within the routing elements. The I2RS client interacts with the I2RS agent in one or more network routing systems. The I2RS architecture defines the I2RS control plane datastore as ephemeral - which means it does not persist across a reboot.



## **2. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

In this document, these words will appear with that interpretation only when in ALL CAPS. Lower case uses of these words are not to be interpreted as carrying [RFC-2119](#) significance.

## **3. Definitions and Acronyms**

CLI

Command Line Interface

FB-RIB

Filter-Based Routing Information Base

FB-Route

The policy rules in the filter-based RIB are prescriptive of the Event-Condition-Action form which is often represented by if Condition then action".

Policy Group

Policy Groups are groups of policy rules. The groups of policy in the basic network policy [[I-D.ietf-i2rs-pkt-eca-data-model](#)] allow grouping of policy by name. This structure allow easier management of customer-based or provider based filters, but does not change the policy-rules list.

RIB IM

RIB Informational Model (RIB IM) [[I-D.ietf-i2rs-rib-info-model](#)]

Routing instance

A routing instance, in the context of the FB-FIB is a collection of RIBs, interfaces, and routing parameters. A routing instance creates a logical slice of the router and allows different logical slices; across a set of routers; to communicate with each other.



#### **4. High level Yang structure for the FB-RIB**

There are three levels in the Filter-Based RIB (FB-RIB) structure:

- o a global FB-RIB structures,
- o the common structure of the FB-RIB, and
- o the groupings that make up the FB-RIB

All structures have two types: configuration/ephemeral state and operational state.

This yang model allows for three types of FB-RIB installations in three types of datastores:

configuration (Config=TRUE, ephemeral=false, opstate definitions)

ephemeral control plane (E.g. I2RS Agent, config=TRUE, ephemeral=TRUE, opstate definitions), and

non-ephemeral control plane datastore (e.g. dBGp FB-FIB with config=TRUE; ephemeral=false, opstate which stores BGP Flow Specification received by bgp speaker from BGP peers).

Each of these cases is differentiated by using an "if-feature" to provide unique RIB under the routing instance.





## Configuration RIBS

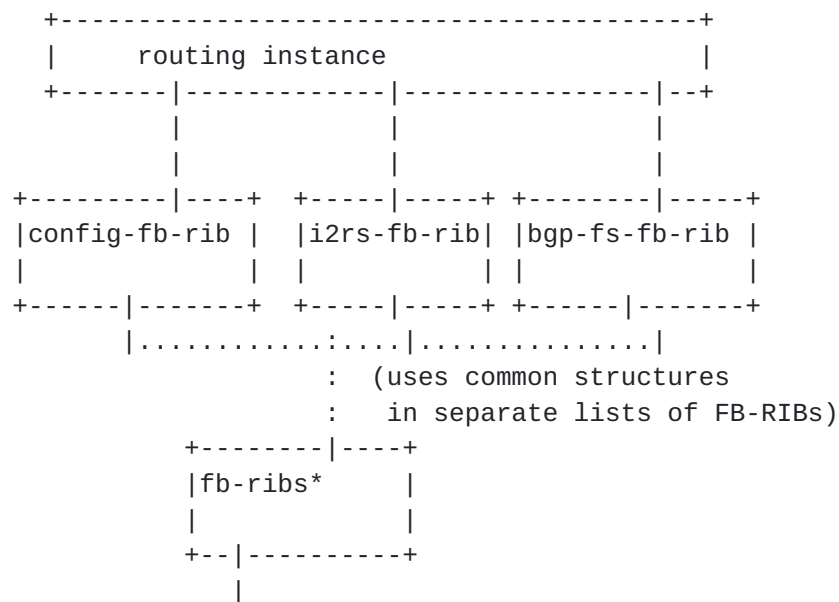


Figure 3: Routing instance with three types of Filter-FIB lists

The following section provides the high level yang structure diagrams for the following levels of structures for both config/ephemeral state and operationa.

- o ietf-fb-rib - contains filter-based RIBS for config, I2RS FB-RIB, and BGP Flow Specification.
- o fb-rib - that contains the structures for the filter-based grouping
- o fb-rib-types - that contains the structures for groupings within the filter-based RIBS

These structures are contained within the yang section in this draft.

The packet-reception ECA policy yang module is contained in the draft [\[I-D.ietf-i2rs-pkt-eca-data-model\]](#).

For those who desire more information regarding the logic behind the I2RS Filter-Based RIB, please see the Informational Model at: [\[I-D.ietf-i2rs-fb-rib-info-model\]](#).



#### [4.1.](#) Top Level Yang Structure for ietf-fb-rib

The Top-level Yang structure for a global FB-RIB types (similar to acl) is not defined for filter-based RIBS. The I2RS Filter-Based RIB should be defined under this structure under a routing instance. The three things under this RIB would be: configured Filter-Based RIB (aka Policy routing), I2RS reboot Ephemeral Filter-Based RIB, and BGP Flow Specification's Filter-Based RIB. All of these RIBs have similar actions.

There are two types top-level structures for ietf-fb-ribs: config and operational state.

The Top-level Yang structure for a global configuration of Filter-Based RIBs are:

```
Augments rt:logical-network-elements:\
    :logical-network-element:network-instances: \
        network-instance

ietf-fb-rib module
  +--rw ietf-fb-rib
    +--rw default-instance-name string
    +--rw default-router-id rt:router-id
    +--rw config-fb-ribs
      if-feature "config-filter-based-RIB";
      uses fb-ribs;
    +--rw i2rs-fb-ribs
      if-feature "I2RS-filter-based-RIB";
      uses fb-rib-t:fb-ribs;
    +--rw bgp-fs-fb-ribs
      if-feature "BGP-FS-filter-based-RIB";
      uses fb-rib-t:fb-ribs;
```

Figure 5: configuration state

The Top-level Yang structure for a global operational state of Filter-Based RIBs are:



```
Augments rt:logical-network-elements:\
      :logical-network-element:network-instances: \
        network-instance

ietf-fb-rib module
  +--rw ietf-fb-rib-opstate
    +--rw default-instance-name string
    +--rw default-router-id rt:router-id
      +--rw config-fb-rib-opstate
        if-feature "config-filter-based-RIB";
        uses fb-rib-t:fb-ribs-oper-status;
      +--rw i2rs-fb-rib-opstate {
        if-feature "I2RS-filter-based-RIB";
        uses fb-rib-t:fb-ribs-oper-status;
      +--rw bgp-fs-fb-rib-opstate
        if-feature "BGP-FS-filter-based-RIB";
        uses fb-rib-t:fb-ribs-oper-status;
```

Figure 5: operational state

#### [4.2.](#) Filter-Based RIB structures

The Top-level yang structures at the Filter-Based RIB level have two types: configuration and operational state.

The Top-level Yang structure for the FB-RIB types is:



```

module: fb-rib-types:
+--rw fb-ribs
  +--rw fb-rib* [rib-name]
    | +--rw rib-name string
    | | rw fb-type identityref / ephemeral or not
    | +--rw rib-afi rt:address-family
    | +--rw fb-rib-intf* [name]
    | | +--rw name string
    | | +--rw intf if:interface
    | +--rw default-rib
    | | +--rw rt-rib string
    | | +--rw config-rib string; // config rib name
    | | +--rw i2rs-rib:routing-instance:name
    | | +--rw i2rs-rib string; //ephemeral rib name
    | | +--rw bgp-instance-name string
    | | +--rw bgp-rib string //session ephemeral
    | +--rw fb-rib-refs
    | | +--rw fb-rib-update-ref uint32
    | | | /count of writes
    | +--rw instance-using*
    | | device:networking-instance:\
    | | | /networking-instance-name
    | +--uses pkt-eca:pkt-eca-policy-set
    | +--uses acls:access-lists

```

Figure 6: FB RIB Type Structure

Note: acls:access-lists is the list of ACL filters in [\[I-D.ietf-netmod-acl-model\]](#).

High Level Yang

```

+--rw fb-ribs-oper-status
  +--rw fb-rib-oper-status* [fb-rib-name]
    uses pkt-eca:pkt-eca-opstate

```

## 5. yang models

### 5.1. Filter-Based RIB types

```

<CODE BEGINS> file "ietf-fb-rib-types@2017-03-13.yang"
module ietf-fb-rib-types {

  yang-version "1";

  // namespace
  namespace "urn:ietf:params:xml:ns:yang:ietf-fb-rib-types";

```





```
prefix "fb-rib-t";
  import ietf-interfaces {prefix "if";}
  import ietf-routing {prefix "rt";}
  import ietf-pkt-eca-policy {prefix "pkt-eca";}
  import ietf-access-control-lists {prefix "acls";}

// meta
organization
  "IETF";

contact
  "email: shares@ndzh.com;
    email: sriganesh.kini@ericsson.com
    email: cengiz@packetdesign.com
    email: ivandean@gmail.org
    email: linda.dunbar@huawei.com;
    email: russ@riw.com;
  ";

description
  "This module describes a YANG model for the I2RS
  Filter-based RIB Types. These types
  specify types for the Filter-Based RIB.

  Copyright (c) 2015 IETF Trust and the persons identified as
  the document authors. All rights reserved.

  Redistribution and use in source and binary forms, with or
  without modification, is permitted pursuant to, and subject
  to the license terms contained in, the Simplified BSD
  License set forth in Section 4.c of the IETF Trust's Legal
  Provisions Relating to IETF Documents
  (http://trustee.ietf.org/license-info).";

revision "2017-03-13" {
  description
    "Filter-Based RIB protocol ";
  reference "draft-ietf-i2rs-fb-rib-data-model-01";
}

typedef fb-rib-type-def {
  type identityref {
    base "fb-rib-type";
  }
  description
    "This type is used to refer to
    source of Filter-Based RIB:"
```



```
        configuration, I2RS, Flow-Spec.";
    }

    identity fb-rib-type {
        description
            "This type is used to refer to
            source of Filter-Based RIB:
            configuration, I2RS, Flow-Spec.";
    }

    identity fb-rib-config-type {
        base fb-rib-type;
        description
            "config Filter-Based RIB";
    }

    identity fb-rib-i2rs-ephemeral-type {
        base fb-rib-type;
        description
            "I2RS Reboot ephemeral Filter-Based RIB";
    }

    identity fb-rib-BGP-FS-type {
        base fb-rib-type;
        description
            "BGP Flow Specification Filter-Based RIB";
    }

    typedef fb-rib-policy-type-def {
        type identityref {
            base "fb-rib-policy-type";
        }
        description
            "This type is used to refer to FB-RIB type";
    }

    identity fb-rib-policy-type {
        description
            "Types of filter-based policies
            acl and eca";
    }

    identity fb-rib-acl {
        base fb-rib-policy-type;
        description
            "filter based policy based on access-lists";
    }
```



```
    identity fb-bnp-eca-rules {
        base fb-rib-policy-type;
        description
        "filter based policy based on qos forwarding rules";
    }

typedef fb-rules-status {
    type identityref {
        base "fb-rule-opstat";
    }
    description
    "This type is used to refer to FB-RIB type";
}

identity fb-rule-opstat {
    description
    "operational statuses for filter rules
    inactive and active";
}

identity fb-rule-inactive {
    base fb-rule-opstat;
    description
    "policy rule is inactive";
}

identity fb-rule-active {
    base fb-rule-opstat;
    description
    "policy rule is active";
}

grouping fb-rib-rule-order-status {
    leaf statement-order {
        type uint16;
        description "order identifier";
    }
    leaf statement-oper_status {
        type fb-rules-status;
        description "status of rule";
    }
    description "filter-rib
    policy rule order and status";
}

grouping fb-rib-group-order-status {
    leaf group-refcnt {
        type uint16;
```



```
        description "refcnt for this group";
    }
    leaf group-installed {
        type uint32;
        description "number of rules installed";
    }
    leaf group-matches {
        type uint64;
        description "number of matches by all
            rules in group";
    }
    description "fb-rib group list order
        and status info.";
}

grouping fb-rib-updates {
    leaf fb-rib-update-ref {
        type uint64;
        description
            "number of updates to this FB RIB
            since last reboot";
    }
    description "FB-RIB update info";
}

grouping default-fb-rib {
    // configuration instance for default RIB
    leaf config-instance {
        type string;
        description "instance name - string until
            netmod fixes mount issues";
    }
    leaf config-rib {
        type string;
        description "name of config default RIB";
    }
    //I2RS default instance for default RIB
    leaf i2rs-instance-name {
        type string;
        description "I2RS instance name";
    }
    leaf i2rs-rib-name {
        type string;
        description "name of default I2RS RIB";
    }
    leaf bgp-instance-name {
        type string;
        description "name of bgp instance";
    }
}
```





```
    }

    leaf bgp-fs-rib-name {
        type string;
        description "name of BGP
                    flow specification default RIB";
    }
    description "default RIB for forwarding
                if the policy match";
}

grouping fb-ribs {
    list fb-rib {
        key fb-rib-name;
        leaf fb-rib-name {
            type string;
            mandatory true;
            description "RIB name";
        }
        uses rt:address-family;
        leaf fb-type {
            type fb-rib-type-def;
            description "type of RIB
                        list: config, I2RS reboot
                        ephemeral, BGP Flow Specification
                        ephemeral. ";
        }
    }
    list fb-rib-intf {
        key "name";
        leaf name {
            type if:interface-ref;
            description
                "A reference to the name of a
                 configured network layer
                 interface.";
        }
        description "This represents
                    the list of interfaces
                    associated with this routing instance.
                    The interface list helps constrain the
                    boundaries of packet forwarding.
                    Packets coming on these interfaces are
                    directly associated with the given routing
                    instance. The interface list contains a
                    list of identifiers, with each identifier
                    uniquely identifying an interface.";
    }
    uses default-fb-rib; // defaults ribs
```



```
        uses fb-rib-updates; // write refs to this RIB
    list instance-using {
        key instance-name;
        leaf instance-name {
            type string;
            description
                " name of instance using this fb-rib
                rt:routing-instance";
        }
        description "instances using
        this fb-rib";
    }
    // ordered rule list + group list
    uses pkt-eca:pkt-eca-policy-set;

    // ordered acl list
    uses acs:access-lists;

    description "Configuration of
    an filter-based rib list";
}
description "fb-rib group";
}

grouping fb-ribs-oper-status {
    list fb-rib-oper-status {
        key fb-rib-name;
        leaf fb-rib-name {
            type string;
            description "rib name";
        }
        leaf pkt-eca-cfged {
            type boolean;
            description
                "pkt eca configured";
        }
        leaf acs-cfged {
            type boolean;
            description
                "acs configured";
        }
    }
    uses pkt-eca:pkt-eca-opstate;
    description
        "Configuration of
        an filter-based rib list";
}
description
    "list of FB-FIB operational
```



```
        status";
    }

}
```

<CODE ENDS>

## **5.2. FB-RIB**

```
<CODE BEGINS> file "ietf-fb-rib@2017-03-13.yang"
module ietf-fb-rib {
  yang-version "1";

  // namespace
  namespace "urn:ietf:params:xml:ns:yang:ietf-fb-rib";
  // replace with iana namespace when assigned
  prefix "fb-rib";

  // import some basic inet types
  import ietf-yang-types {prefix "yang";}
  import ietf-fb-rib-types { prefix "fb-rib-t";}

  // meta
  organization
    "IETF";

  contact
    "email: sriganesh.kini@ericsson.com
      email: cengiz@packetdesign.com
      email: anoop@ieee.duke.edu
      email: ivandean@gmail.org
      email: shares@ndzh.com;
      email: linda.dunbar@huawei.com;
      email: russ@riw.com;
    ";

  description
    "This Top level module describes a YANG model for the I2RS
      Filter-based RIB which is an global protocol independent FB RIB
      module.";

  revision "2017-03-13" {
    description "initial revision";
    reference "draft-ietf-i2rs-fb-rib-data-model-01";
  }

  feature config-filter-based-RIB {
```



```
description
  "This feature means that a node support
  config filter-based rib.";
}
  feature I2RS-filter-based-RIB {
description
  "This feature means that a node support
  I2RS filter-based rib.";
}
  feature BGP-FS-filter-based-RIB {
description
  "This feature means that a node support
  BGP FS filter-based rib.";
}

  container ietf-fb-rib {
    presence "top-level structure for
    configuration";
    leaf default-instance-name {
      type string;
      mandatory true;
    description
      "A routing instance is identified by its name,
      INSTANCE_name. This MUST be unique across all routing
      instances in a given network device.";
    }
    leaf default-router-id {
      type yang:dotted-quad;
      description "Default router id";
    }
    container config-fb-rib {
      if-feature config-filter-based-RIB;
      uses fb-rib-t:fb-ribs;
      description "config filter-based RIB";
    }

    container i2rs-fb-rib {
      if-feature I2RS-filter-based-RIB;
      uses fb-rib-t:fb-ribs;
      description "bgp-fs filter-based RIB";
    }
    container bgp-fs-fb-rib {
      if-feature BGP-FS-filter-based-RIB;
      uses fb-rib-t:fb-ribs;
      description "bgp fs filter-based RIB";
    }
    description "fb-rib augments routing instance";
```





```
    }

    container ietf-fb-rib-opstate {
      presence "top-level structure for
        op-state";
      config "false";
    leaf default-instance-name {
      type string;
      mandatory true;
    }
    description
      "A routing instance is identified by its name,
        INSTANCE_name.  This MUST be unique across all routing
        instances in a given network device.";
  }
  leaf default-router-id {
    type yang:dotted-quad;
    description "Default router id";
  }
  container config-fb-rib-opstate {
    if-feature config-filter-based-RIB;
    uses fb-rib-t:fb-ribs-oper-status;
    description "config filter-based RIB";
  }
  container i2rs-fb-rib-opstate {
    if-feature I2RS-filter-based-RIB;
    uses fb-rib-t:fb-ribs-oper-status;
    description "bgp-fs filter-based RIB";
  }
  container bgp-fs-fb-rib-opstate {
    if-feature BGP-FS-filter-based-RIB;
    uses fb-rib-t:fb-ribs-oper-status;
    description "bgp fs filter-based RIB";
  }
  description "fb-rib augments routing instance";
}
}
```

<CODE ENDS>

## **6. IANA Considerations**

TBD



## **7. Security Considerations**

A I2RS RIB is ephemeral data store that will dynamically change traffic paths set by the routing configuration. An I2RS FB-RIB provides dynamic Event-Condition-Action policy that will further change the operation of forwarding by allow dynamic policy and ephemeral RIBs to alter the traffic paths set by routing configuration. Care must be taken in deployments to use the appropriate security and operational control to make use of the tools the I2RS RIB and I2RS FB-RIB provide.

## **8. References**

### **8.1. Normative References:**

[I-D.ietf-i2rs-pkt-eca-data-model]

Hares, S., Wu, Q., and R. White, "Filter-Based Packet Forwarding ECA Policy", [draft-ietf-i2rs-pkt-eca-data-model-02](#) (work in progress), October 2016.

[I-D.ietf-i2rs-rib-data-model]

Wang, L., Ananthakrishnan, H., Chen, M., amit.dass@ericsson.com, a., Kini, S., and N. Bahadur, "A YANG Data Model for Routing Information Base (RIB)", [draft-ietf-i2rs-rib-data-model-07](#) (work in progress), January 2017.

[I-D.ietf-netmod-acl-model]

Bogdanovic, D., Koushik, K., Huang, L., and D. Blair, "Network Access Control List (ACL) YANG Data Model", [draft-ietf-netmod-acl-model-10](#) (work in progress), March 2017.

[I-D.ietf-netmod-routing-cfg]

Lhotka, L. and A. Lindem, "A YANG Data Model for Routing Management", [draft-ietf-netmod-routing-cfg-25](#) (work in progress), November 2016.

### **8.2. Informative References**

[I-D.ietf-i2rs-fb-rib-info-model]

Kini, S., Hares, S., Dunbar, L., Ghanwani, A., Krishnan, R., Bogdanovic, D., and R. White, "Filter-Based RIB Information Model", [draft-ietf-i2rs-fb-rib-info-model-00](#) (work in progress), June 2016.



[I-D.ietf-i2rs-rib-info-model]

Bahadur, N., Kini, S., and J. Medved, "Routing Information Base Info Model", [draft-ietf-i2rs-rib-info-model-10](#) (work in progress), December 2016.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

[RFC7921] Atlas, A., Halpern, J., Hares, S., Ward, D., and T. Nadeau, "An Architecture for the Interface to the Routing System", [RFC 7921](#), DOI 10.17487/RFC7921, June 2016, <<http://www.rfc-editor.org/info/rfc7921>>.

Authors' Addresses

Susan Hares  
Huawei  
7453 Hickory Hill  
Saline, MI 48176  
USA

Email: [shares@ndzh.com](mailto:shares@ndzh.com)

Sriganesh Kini  
Ericsson

Email: [sriganesh.kini@ericsson.com](mailto:sriganesh.kini@ericsson.com)

Linda Dunbar  
Huawei  
USA

Email: [linda.dunbar@huawei.com](mailto:linda.dunbar@huawei.com)

Ram Krishnan  
Dell

Email: [Ramkri123@gmail.com](mailto:Ramkri123@gmail.com)



Dean Bogdanovic  
Juniper Networks  
Westford, MA

Email: [ivandean@gmail.org](mailto:ivandean@gmail.org)

Russ White  
Linkedin

Email: [russ@riw.us](mailto:russ@riw.us)