

Network Working Group
Internet Draft
Expires: September 29, 2008

Anca Zamfir
Zafar Ali
Cisco Systems
Dimitri Papadimitriou
Alcatel-Lucent
March 30, 2008

Component Link Recording and Resource Control for TE Link Bundles

[draft-ietf-mpls-explicit-resource-control-bundle-03.txt](#)

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on September 29, 2008.

Copyright Notice

Copyright (C) The IETF Trust (2008).

Abstract

Record Route is a useful administrative tool that has been used extensively by the service providers. However, when TE links are bundled, identification of label resource in Record Route Object (RRO) is not enough for the administrative purpose. Network service

 Component Link Record. & Resource Control for TE Link Bundles Mar.2008

providers would like to know the component link within a TE link that is being used by a given LSP. In other words, when link bundling is used, resource recording requires mechanisms to specify the component link identifier, along with the TE link identifier and Label. As it is not possible to record component link in the RRO, this draft defines the extensions to RSVP-TE [[RFC3209](#)] and [[RFC3473](#)] to specify component link identifiers for resource recording purposes.

This draft also defines the Explicit Route Object (ERO) counterpart of the RRO extension. The ERO extensions are needed to perform explicit label/ resource control over bundled TE link. Hence, this document defines the extensions to RSVP-TE [[RFC3209](#)] and [[RFC3473](#)] to specify component link identifiers for explicit resource control and recording over TE link bundles.

Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Table of Contents

1.	Terminology.....	2
2.	Resource Control and Recording.....	3
3.	LSP Resource Recording.....	4
3.1	Component Interface Identifier RRO subobject.....	4
3.2	Processing of Component Interface identifier RRO Subobject.	5
4.	Signaling Component Interface Identifier in ERO.....	6
4.1	Processing of Component Interface Identifier ERO Subobject.	7
5.	Forward Compatibility Note.....	9
6.	Security Considerations.....	9
7.	IANA Considerations.....	10
8.	References.....	10
8.1	Normative Reference.....	10
8.2	Informative Reference.....	11
9.	Author's Addresses.....	11
10.	Intellectual Property Considerations.....	12
11.	Full Copyright Statement.....	12

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

1. Terminology

TE Link: Unless specified otherwise, it refers to a bundled Traffic Engineering link as defined in [[RFC4201](#)]. Furthermore, the terms TE Link and bundled TE Link are used interchangeably in this draft.

Component (interface) link: refers (locally) to a component link as part of a bundled TE link. A component link is numbered/ unnumbered in its own right. For unnumbered component links, the component link ID is assumed to be unique on an advertising node. For numbered component links, the component link ID is assumed to be unique within a domain.

Component Interface Identifier: Refers to an ID used to uniquely identify a Component Interface. On a bundled link a combination of <component link identifier, label> is sufficient to unambiguously identify the appropriate resources used by an LSP [[RFC4201](#)].

2. Resource Control and Recording

In GMPLS networks that deals with unbundled (being either PSC, L2SC, TDM or LSC) TE Links, one of the types of resources that an LSP originator can control and would like to record are the TE Link interfaces used by the LSP. The resource control and recording is done by the use of an explicit route, i.e., Explicit Route (ERO) Object and record Route, i.e., Record Route Object (RRO) object, respectively.

Link Bundling, introduced in [[RFC4201](#)], is used to improve routing scalability by reducing the amount of TE related information that needs to be flooded and handled by IGP in a TE network. This is accomplished by aggregating and abstracting the TE Link resource. In some cases the complete resource identification is left as a local decision. However, as described above there are cases when it is desirable for a non-local (e.g., LSP head-end) node to identify completely or partially the LSP resources. In either case, and for

administrative reasons, it is required to know which component link within a bundled TE link has been used for a given LSP.

When link bundling is used to aggregate multiple component links into a TE link, label is not the only resource that needs to be identified and recorded. In other words, the TE Link and the Label specified in the ERO/ RRO objects are not enough to completely identify the resource. For the bundled TE link case, in order to fully specify the resources on a link for a given LSP, the component link needs to be specified along with the label. In the case of bi-directional LSPs both upstream and downstream information may be specified. Therefore, explicit resource control and recording over a bundled TE link also requires ability to specify a component link within the TE link.

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

This draft defines extensions to and describes the use of RSVP-TE [[RFC3209](#)], [[RFC3471](#)], [[RFC3473](#)] to specify the component link identifier for resource recording and explicit resource control over TE link bundles. Specifically, in this document, component interface identifier RRO and ERO subobjects are defined to complement their Label RRO and ERO counterparts. Furthermore, procedures for processing component interface identifier RRO and ERO subobjects and how they can co-exist with the Label RRO and ERO subobjects are specified.

[3.](#) LSP Resource Recording


LSP Resource Recording refers to the ability to record the resources used by an LSP.

The procedure for unbundled numbered TE links is described in [[RFC3209](#)] and for unbundled unnumbered TE links in [[RFC3477](#)]. For the purpose of recording LSP resources used over bundled TE Links, the Component Interface Identifier RRO sub-object is introduced.

[3.1](#) Component Interface Identifier RRO subobject

A new subobject of the Record Route Object (RRO) is used to record component interface identifier of a (bundled) TE Link. This subobject has the following format:

0		1		2		3															
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1

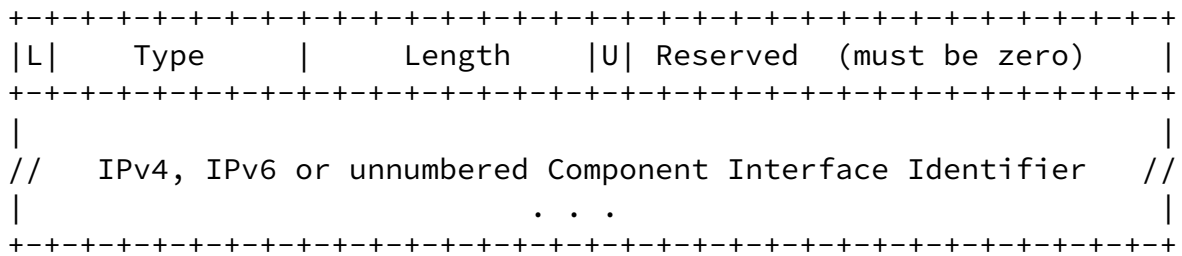

L: 1 bit

This bit must be set to 0.

Type

- Type 10 (TBD): Component Interface identifier IPv4
- Type 11 (TBD): Component Interface identifier IPv6
- Type 12 (TBD): Component Interface identifier Unnumbered

Length

The Length contains the total length of the subobject in bytes, including the Type and Length fields. The Length is 8 bytes for the Component Interface identifier IPv4 and Component Interface identifier Unnumbered types. For Component Interface identifier IPv6 type of sub-object, the length field is 20 bytes.

U: 1 bit

This bit indicates the direction of the component interface. It is 0 for the downstream interface. It is set to 1 for the upstream interface and is only used for bi-directional LSPs.

[3.2](#) Processing of Component Interface identifier RRO Subobject

If a node desires component link recording, the "Component Link Recording desired" flag (value TBD) should be set in the LSP_ATTRIBUTES object, object that is defined in [[RFC4420](#)].

Setting of "Component Link Recording desired" flag is independent of

the Label Recording flag in SESSION_ATTRIBUTE object as specified in [RFC3209]. Nevertheless, the following combinations are valid:

- 1) If both Label and Component Link flags are clear, then neither Labels nor Component Links are recorded.
- 2) If Label Recording flag is set and Component Link flag is clear, then only Label Recording is performed as defined in [RFC3209].
- 3) If Label Recording flag is clear and Component Link flag is set, then Component Link Recording is performed as defined in this proposal.
- 4) If both Label Recording and Component Link flags are set, then Label Recording is performed as defined in [RFC3209] and also Component Link recording is performed as defined in this proposal.

In most cases, a node initiates recording for a given LSP by adding the RRO to the Path message. If the node desires Component Link recording and if the outgoing TE link is bundled, then the initial RRO contains the Component Link identifier (numbered or unnumbered) as selected by the sender. As well, the Component Link Recording desired flag is set in the LSP_ATTRIBUTE object. If the node also desires label recording, it sets the Label_Recording flag in the SESSION_ATTRIBUTE object.

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

When a Path message with the "Component Link Recording desired" flag set is received by an intermediate node, if a new Path message is to be sent for a downstream bundled TE link, the node adds a new Component Link subobject to the RECORD_ROUTE object (RRO) and appends the resulting RRO to the Path message before transmission.

Note also that, unlike Labels, Component Link identifiers are always known on receipt of the Path message.

When the destination node of an RSVP session receives a Path message with an RRO and the "Component Link Recording desired" flag set, this indicates that the sender node needs TE route as well as component link recording. The destination node initiates the RRO process by adding an RRO to Resv messages. The processing mirrors that of the Path messages


The Component Interface Record subobject is pushed onto the RECORD_ROUTE object (RRO) prior to pushing on the node's IP address. A node MUST NOT push on a Component Interface Record subobject without also pushing on the IP address or unnumbered Interface Id subobject that identifies the TE Link.

When component interfaces are recorded for bi-directional LSPs, component interface RRO subobjects for both downstream and upstream interfaces MUST be included.

4. Signaling Component Interface Identifier in ERO

A new OPTIONAL subobject of the EXPLICIT_ROUTE Object (ERO) is used to specify component interface identifier of a bundled TE Link.

This Component Interface Identifier subobject has the following format:

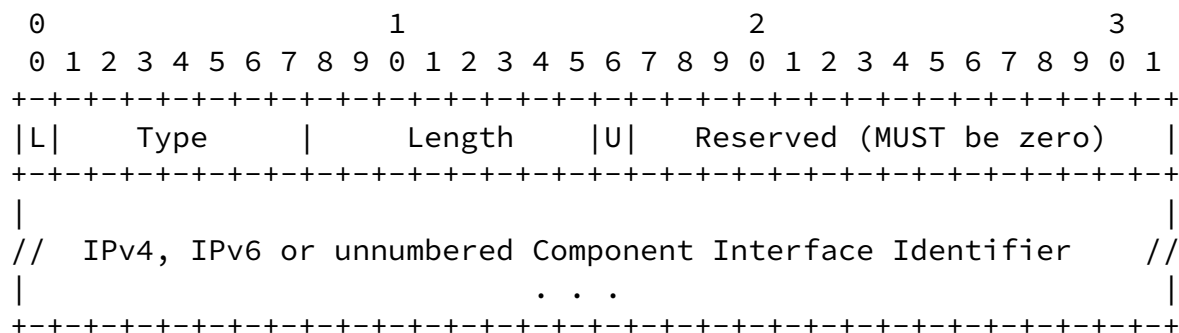

L: 1 bit

This bit must be set to 0.

Type

- Type 10 (TBD): Component Interface identifier IPv4
- Type 11 (TBD): Component Interface identifier IPv6
- Type 12 (TBD): Component Interface identifier Unnumbered

Length

The Length contains the total length of the subobject in

bytes, including the Type and Length fields. The Length is 8 bytes for the Component Interface identifier types: IPv4 and Component Interface identifier Unnumbered. For Component Interface identifier IPv6 type of sub-object, the length field is 20 bytes.

U: 1 bit

This bit indicates the direction of the component interface. It is 0 for the downstream interface. It is set to 1 for the upstream interface and is only used for bi-directional LSPs.

4.1 Processing of Component Interface Identifier ERO Subobject

The Component Interface Identifier ERO subobject follows a subobject containing the IP address, or the link identifier [[RFC3477](#)], associated with the TE link on which it is to be used. It is used to identify the component of a bundled TE Link.

The following SHOULD result in "Bad EXPLICIT_ROUTE object" error being sent upstream by a node processing an ERO that contains the Component Interface ID sub-object:

- o) The first component interface identifier subobject is not preceded by a sub-object containing an IPv4 or IPv6 address, or an interface identifier [[RFC3477](#)], associated with a TE link.
- o) The Component Interface Identifier ERO subobject follows a subobject that has the L-bit set.
- o) On unidirectional LSP setup, there is a Component Interface Identifier ERO subobject with the U-bit set.
- o) Two Component Interface Identifier ERO subobjects with the same U-bit values exist.

If a node implements the component interface identifier subobject, it MUST check if it represents a component interface in the bundled TE Link specified in the preceding subobject that contains the IPv4/IPv6 address or interface identifier of the TE Link. If the content of the component interface identifier subobject does not match a component

be reported as "Routing Problem" (error code 24).

If U-bit of the subobject being examined is cleared (0) and the upstream interface specified in this subobject is acceptable, then the value of the upstream component interface is translated locally in the TLV of the IF_ID RSVP HOP object [[RFC3471](#)]. The local decision normally used to select the upstream component link is bypassed except for local translation into the outgoing interface identifier from the received incoming remote interface identifier. If this interface is not acceptable, a "Bad EXPLICIT_ROUTE object" error SHOULD be reported as "Routing Problem" (error code 24).

If the U-bit of the subobject being examined is set (1), then the value represents the component interface to be used for upstream traffic associated with the bidirectional LSP. Again, if this interface is not acceptable or if the request is not one for a bidirectional LSP, then a "Bad EXPLICIT_ROUTE object" error SHOULD be reported as "Routing Problem" (error code 24). Otherwise, the component interface IP address/ identifier is copied into a TLV sub-object as part of the IF_ID RSVP_HOP object. The local decision normally used to select the upstream component link is bypassed except for local translation into the outgoing interface identifier from the received incoming remote interface identifier.

The IF_ID RSVP_HOP object constructed as above MUST be included in the corresponding outgoing Path message.

Note that, associated with a TE Link sub-object in the ERO, either the (remote) upstream component interface or the (remote) downstream component interface or both may be specified. As specified in [[RFC4201](#)] there is no relationship between the TE Link type (numbered or unnumbered) and the Link type of any one of its components.

The Component Interface Identifier ERO subobject is optional. Similarly, presence of the Label ERO sub-objects is not mandatory [[RFC3471](#)], [[RFC3473](#)]. Furthermore, component interface identifier ERO subobject and Label ERO subobject may be included in the ERO independently of each other. One of the following alternatives applies:

- o) When both sub-objects are absent, a node may select any appropriate component link within the TE link and any label on the selected component link.
- o) When the Label subobject is only present for a bundled link, then the selection of the component link within the bundle is a local decision and the node may select any appropriate component link, which can assume the label specified in the Label ERO.

- o) When only the component interface identifier ERO subobject is present, a node MUST select the component interface specified in the ERO and may select any appropriate label value at the specified component link.
- o) When both component interface identifier ERO subobject and Label ERO subobject are present, the node MUST select the locally corresponding component link and the specified label value on that component link. When present, both subobjects may appear in any relative order to each other but they MUST appear after the TE Link subobject that they refer to.

After processing, the component interface identifier subobjects are removed from the ERO.

Inferred from above, the interface subobject should never be the first subobject in a newly received message. If the component interface subobject is the first subobject in a received ERO, then it SHOULD be treated as a "Bad strict node" error.

Note: Information to construct the Component Interface ERO subobject may come from the same mean used to populate the label ERO subobject. Procedures by which an LSR at the head-end of an LSP obtains the information needed to construct the Component Interface subobject are outside the scope of this document.

5. Forward Compatibility Note

The extensions specified in this draft do not affect the processing of the RRO, ERO at nodes that do not support them. A node that does not support the Component Interface RRO subobject but that does support Label subobject SHOULD only insert the Label subobject in the RRO as per [[RFC3471](#)] and [[RFC3473](#)].

A node that receives an ERO that contains a Component Link ID subobject SHOULD send "Bad EXPLICIT_ROUTE object" if it does not implement this subobject.

Per [[RFC3209](#)], [Section 4.4.5](#), a non-compliant node that receives an RRO that contains Component Interface Identifier sub-objects should ignore and pass them on. This limits the full applicability of if nodes traversed by the LSP are compliant with the proposed extensions.

6. Security Considerations

This document does not introduce new security issues. The security considerations pertaining to the original RSVP protocol [[RFC2205](#)] remain relevant.

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

7. IANA Considerations

This document introduces the following RSVP protocol elements:

- o) Component Interface Identifier RRO subobject of the Record Route Object (RRO). The following Types are defined:

- Type 10 (TBD): Component Interface identifier IPv4

- Type 11 (TBD): Component Interface identifier IPv6

- Type 12 (TBD): Component Interface identifier Unnumbered

- o) Component Interface Identifier subobject of the Explicit Route Object (ERO). The following Types are defined:

- Type 10 (TBD): Component Interface identifier IPv4

- Type 11 (TBD): Component Interface identifier IPv6

- Type 12 (TBD): Component Interface identifier Unnumbered

- o) A new "Component Link Recording desired" flag (value TBD) of the LSP_ATTRIBUTES object [[RFC4420](#)]

8. References

8.1 Normative Reference

- [RFC2205] R. Braden, et al., "Resource ReSerVation Protocol (RSVP) - Version 1, Functional Specification", [RFC 2205](#), September 1997.
- [RFC2119] S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March 1997.
- [RFC3209] D. Awduche, et al., "Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3471] L. Berger, et al., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#), January 2003.

[RFC3473] L. Berger, et al., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource Reservation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.

[RFC3477] K. Kompella, et al., "Signaling Unnumbered Links in Resource ReSerVation Protocol - Traffic Engineering (RSVP-TE)", [RFC 3477](#), January 2003.

A.Zamfir et al. - Expires September 2008

[Page 10]

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

[RFC4201] K. Kompella, et al., "Link Bundling in MPLS Traffic Engineering", [RFC 4201](#), January 2003.

[RFC4420] A. Farrel, et al., "Encoding of Attributes for Multiprotocol Label Switching (MPLS) Label Switched Path (LSP) Establishment Using Resource Reservation Protocol-Traffic Engineering (RSVP-TE)", [RFC 4420](#), February 2006.

[8.2](#) Informative Reference

[RFC3945] E. Mannie, et al., "Generalized Multi-Protocol Label Switching (GMPLS) Architecture", [RFC 3945](#), October 2004.

[9.](#) Author's Addresses

Anca Zamfir
Cisco Systems Inc.
2000 Innovation Dr.,
Kanata, Ontario, K2K 3E8
Canada.
Phone: (613)-254-3484
Email: ancaz@cisco.com

Zafar Ali
Cisco Systems Inc.
2000 Innovation Dr.,
Kanata, Ontario, K2K 3E8
Canada.
Phone: (613) 889-6158
Email: zali@cisco.com

Dimitri Papadimitriou
Alcatel-Lucent
Copernicuslaan 50
B-2018 Antwerpen
Belgium
Phone: +32 3 240-8491
Email: dimitri.papadimitriou@alcatel-lucent.be

Component Link Record. & Resource Control for TE Link Bundles Mar.2008

10. Full Copyright Statement

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

11. Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be

found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgement

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).