

SIPCORE Working Group
Internet-Draft
Updates: [5502](#) (if approved)
Intended status: Informational
Expires: March 28, 2019

M. Mohali
Orange
September 24, 2018

A P-Served-User Header Field Parameter for Originating CDIV session case
in Session Initiation Protocol (SIP)
[draft-ietf-sipcore-originating-cdiv-parameter-04](#)

Abstract

The P-Served-User header field is used to convey the identity of the served user and the session case that applies to this particular communication session and application invocation. This document updates [RFC5502](#) by defining a new P-Served-User header field parameter, "orig-cdiv". The parameter conveys the session case used by a proxy when handling an originating session after Call Diversion (CDIV) services have been invoked for the served user. This document also fixes the ABNF in [RFC 5502](#) and provides more guidance for using the P-Served-User header field in IP networks.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 28, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

This document may contain material from IETF Documents or IETF Contributions published or made publicly available before November 10, 2008. The person(s) controlling the copyright in some of this material may not have granted the IETF Trust the right to allow modifications of such material outside the IETF Standards Process. Without obtaining an adequate license from the person(s) controlling the copyright in such materials, this document may not be modified outside the IETF Standards Process, and derivative works of it may not be created outside the IETF Standards Process, except to format it for publication as an RFC or to translate it into languages other than English.

Table of Contents

1.	Introduction	2
1.1.	General	3
1.2.	Basic Use Case	3
1.3.	Problem Statement	4
2.	Conventions and Terminology	5
3.	Applicability	5
4.	Proxy behavior and parameter handling	5
5.	Clarification of RFC5502 procedures	6
6.	Syntax	6
6.1.	General	7
6.2.	ABNF	7
7.	Call Flow Examples	8
7.1.	Call diversion case	8
7.2.	Call diversion and privacy	10
8.	IANA Considerations	12
9.	Security Considerations	12
10.	Acknowledgments	13
11.	References	13
11.1.	Normative References	13
11.2.	Informative References	14
	Author's Address	14

[1.](#) Introduction

1.1. General

The P-Served-User header field [[RFC5502](#)] was defined based on a requirement from 3rd Generation Partnership Project (3GPP) IMS (IP Multimedia Subsystem) in order to convey the identity of the served user, his/her registration state and the session case between an Serving Call Session Control Function (S-CSCF) and an Application Server (AS) on the IMS Service Control (ISC) interface. A session case is an information indicating the status of the session in which the served user is involved (originating, terminating..). For more information on session cases and the IMS, a detailed description can be found in [[TS.3GPP.24.229](#)].

[RFC5502] defines the originating and terminating session cases for a registered or unregistered user. This document extends the P-Served-User header field to include the session case for a forwarded leg when a call diversion service (CDIV) has been invoked and if an originating service of the diverting user has to be triggered.

The sessioncase-param parameter of the P-Served-User header field is extended with the "orig-cdiv" parameter for this "originating after CDIV" session case.

The following section defines usage of the "orig-cdiv" parameter of P-Served-User header field, [Section 3](#) discusses the applicability and scope of this new header field parameter, and [Section 4](#) specifies the proxy behavior for handling the new header field parameter.

[Section 5](#) clarifies some of the [[RFC5502](#)] procedures, [Section 6](#) describes the extended syntax and corrects the syntax of [[RFC5502](#)], [Section 8](#) registers the P-Served-User header field parameters with IANA, [Section 7](#) gives some examples, and [Section 9](#) discusses the security properties of the environment where this new header field parameter is intended to be used.

1.2. Basic Use Case

In the 3GPP IMS (IP Multimedia Subsystem), the S-CSCF (Serving CSCF) is a SIP proxy that serves as a registrar and handles originating and terminating session states for users assigned to it. This means that any call that is originated by a specific user or any call that is terminated to that specific user will pass through the S-CSCF that is assigned to that user.

At the moment that an S-CSCF is assigned to a specific user, the user profile is downloaded from the Home Subscriber Server (HSS) to this S-CSCF, see [[TS.3GPP.29.228](#)]. The user profile contains the list of actions to be taken by the S-CSCF for the served user depending on the session direction (originating or terminating) and the user state

(registered or not) in the IMS network. With this user profile, the S-CSCF determines the current case and applies the corresponding actions such as forwarding the request to an AS. The AS then goes through a similar process of determining who is the current served user, what is his/her "registration state", and what is the "session case" of the session. [RFC5502] defines all those parameters and in particular the originating and terminating session cases.

In basic call scenarios, there is no particular issue for the S-CSCF and AS to know which scenario needs to be realized, but in case of call diversion services for which the session is re-targeted, the session cases defined in [RFC5502] pose some limitations as described in the following section.

1.3. Problem Statement

In the case of a call diversion service, the received request is first treated as a terminating session case, and the terminating filter criteria configured in the S-CSCF are performed. A filter criteria is a user profile information that determines whether a particular initial request needs to be sent to a particular AS. When the AS receives the call initiation request, the AS is able to determine the served user and the session case (here "term") from the received P-Served-User header field content and to execute terminating services. When the call diversion service is executed (as a terminating service), the AS changes the target (Request-URI) of the session and a new call leg is created. This new call leg could be considered as an originating call leg from the diverting user but this is not the case. Indeed, the originating user remains the same, and some of the diverting user's originating services should not be triggered as if it was an originating call. For instance, the originating user identity should not be restricted because the diverting user has a privacy service for his/her own identity. The privacy of the diverting user should apply to information related to this user (eg. in the History-Info header field). In the same manner, some specific services will need to be triggered on the outgoing leg after a call diversion. Without a dedicated session case for originating after CDIV, the S-CSCF cannot trigger an originating service for the diverting user, nor can an AS execute the procedures for this particular session case.

For this use case, this document creates a new parameter for the originating after CDIV session case to be embedded in the P-Served-User header field.

2. Conventions and Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

3. Applicability

The use of the P-Served-User header field extensions is only applicable inside a Trust Domain [[RFC3324](#)] for the P-Served-User header field. Nodes in such a Trust Domain explicitly trust each other to convey the served user and to be responsible for withholding that information outside of the Trust Domain. The means by which the network determines the served user and the policies that are executed for a specific served user is outside the scope of this document.

4. Proxy behavior and parameter handling

The following section illustrates how this header field parameter can be used in a 3GPP network.

For a terminating call, the following steps will be followed:

1. The S-CSCF receives the initial INVITE request for a terminating call and determines that the session case is for a terminating user as described in [[RFC5502](#)];
2. The S-CSCF determines who is the served user by looking at the Request-URI and saves the current Request-URI;
3. The S-CSCF analyzes the filter criteria. It then sends the request to the AS of the served user an INVITE that includes the P-Served-User header field with the "sescase" parameter set to "term" and the "regstate" set to the corresponding value in order to trigger execution of terminating services;
4. Based on some criteria, the AS concludes that the request has to be diverted to another target user or application. The AS replaces the received Request-URI with the new diverted-to address and the AS stores the successive Request-URI(s) values by adding one or two History-Info header field entry(ies) [[RFC7044](#)] in the outgoing INVITE. In the History-Info header field, the served user address is tagged using the mp-param header field parameter added in entry associated to the diverted-to address created. The AS forwards the INVITE request back to the S-CSCF;

5. When receiving back the INVITE request, the S-CSCF can see that the topmost Route header field contains its own hostname but the Request-URI does not match the saved Request-URI. In this case, the S-CSCF updates the P-Served-User header field content by replacing the "sescase" parameter with the "orig-cdiv" parameter. The P-Served-User header field value remains unchanged;
6. The S-CSCF forwards the INVITE request to an AS that hosts the originating services of the served user (diverting user) that need to be executed on the forwarded leg after a call diversion service;
7. When the AS receives the INVITE request, it determines that the session case is for "orig-cdiv" session case and performs the originating services to be executed after retargeting for the diverting user (i.e. served user).

5. Clarification of [RFC5502](#) procedures

This document provides the following guidance for the handling of the P-Served-User header field that are missing in [\[RFC5502\]](#):

- o The P-Served-User header field MUST NOT be repeated within a request for a particular session at a particular time for the reason that session cases are mutually exclusive. This document updates [\[RFC5502\]](#) to clearly state that the P-Served-User header field MUST NOT contain multiple values either comma-separated or header-separated. This documents also updates the syntax of the header from [\[RFC5502\]](#) to reflect this uniqueness of parameters values.
- o In [\[RFC5502\]](#), except for security reasons, it is not to clearly stated what to do with the received P-Served-User header field when a call is diverted to another destination. This document dealing with this specific use case, highlights that several possibilities exist: the S-CSCF could store the previous "regstate" value and decide that the same value applies, or the "regstate" may not be relevant after a diverting service and removed, or the regstate could be combined with the orig-cdiv session case to provide different services if the served user is registered or unregistered. These choices are implementation dependent.

6. Syntax

6.1. General

[RFC5502] defines the P-Served-User header field with the sessioncase-param parameter "sescase" which is specified as having "orig" and "term" predefined values. This document defines an additional parameter for the sessioncase-param: "orig-cdiv".

Because this document extends the existing sessioncase-param parameter, and because errors have been identified in the syntax, this document corrects and extends the P-Served-User header field.

The extension of the sessioncase-param parameter to add the "orig-cdiv" session case is done in a way to fit the parameter format introduced in Release 11 of the 3GPP [TS.3GPP.24.229] and to maintain a backward compatibility.

"EQUAL", "HCOLON", "SEMI", "name-addr", "addr-spec", and "generic-param" are defined in [RFC3261].

6.2. ABNF

The augmented Backus-Naur Form (ABNF) [RFC5234] syntax of the P-Served-User header field is described in [RFC5502].

This document updates [RFC5502] to correct the P-Served-User header field ABNF syntax and extend it as following:

```
P-Served-User          = "P-Served-User" HCOLON PServedUser-value
                        *(SEMI served-user-param)
served-user-param      = sessioncase-param
                        / registration-state-param
                        / generic-param
PServedUser-value      = name-addr / addr-spec
sessioncase-param      = "sescase" EQUAL ("orig"/"term")/ orig-cdiv
registration-state-param = "regstate" EQUAL ("unreg" / "reg")
orig-cdiv              = "orig-cdiv"
```

Examples of possible P-Served-User header field:


```
P-Served-User: <sip:user@example.com>; orig-cdiv; regstate=reg
or
P-Served-User: <sip:user@example.com>; orig-cdiv
or
P-Served-User: <sip:user@example.com>; sescase=term; regstate=unreg
```


This document allows choosing between `addr-spec` and `name-addr` when constructing the header field value. As specified in [RFC 8217](#), the "addr-spec" form MUST NOT be used if its value would contain a comma, semicolon, or question mark [[RFC8217](#)].

7. Call Flow Examples

7.1. Call diversion case

The following call flow shows a session establishment when Alice calls Bob, who has a call diversion service that diverts to Carol when Bob is busy.

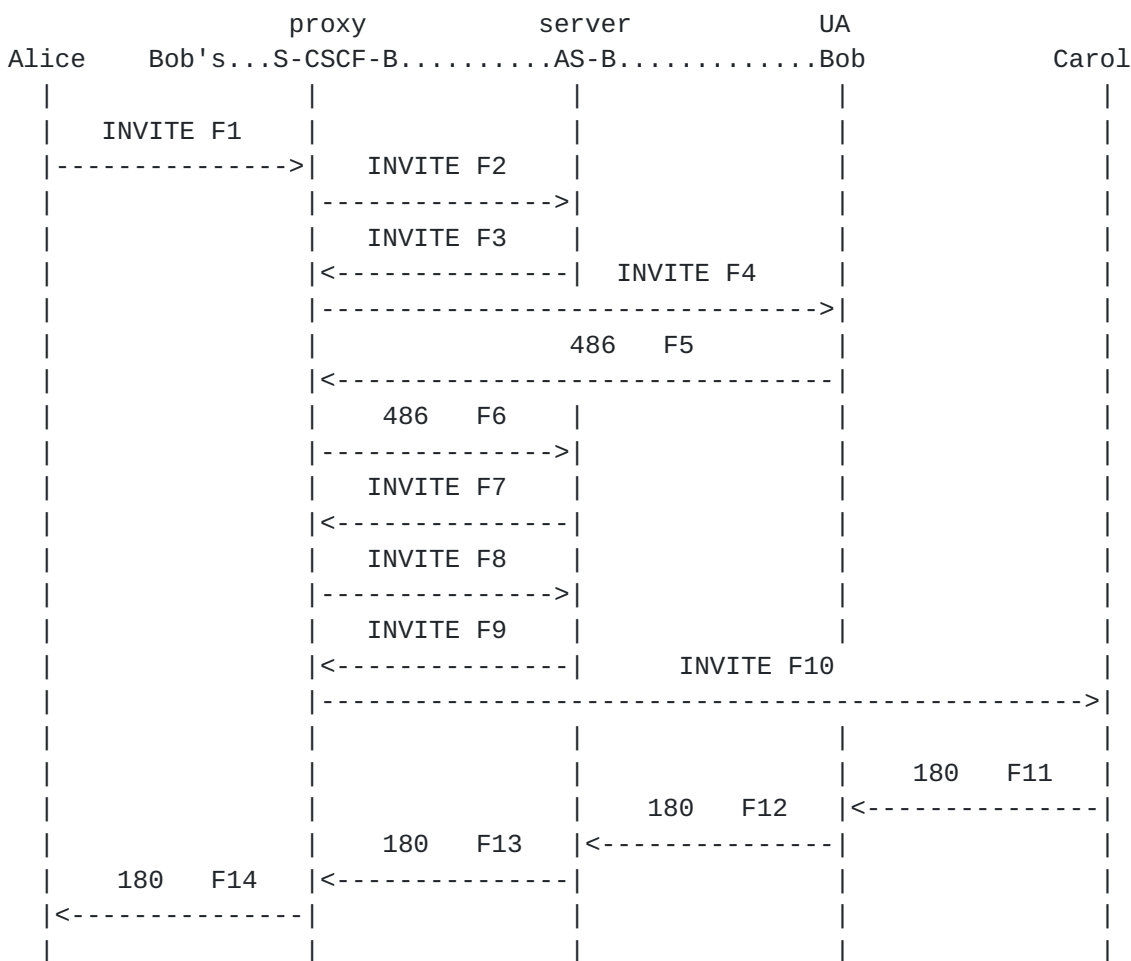

[Alice calls Bob]

F1 INVITE Alice -> S-CSCF-B

INVITE sip:bob@example.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

F2 INVITE S-CSCF-B -> AS-B

INVITE sip:bob@example.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

P-Served-User: <sip:bob@example.com>; term; regstate=reg

F3 INVITE AS-B -> S-CSCF-B

INVITE sip:bob@example.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

P-Served-User: <sip:bob@example.com>; term; regstate=reg

F4 INVITE S-CSCF-B -> Bob

INVITE sip:bob@192.0.2.4 SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

P-Served-User: <sip:bob@example.com>; term; regstate=reg

[Bob is busy. His call diversion when busy is invoked towards Carol]

F5-F6 486 BUSY Bob -> S-CSCF-B -> AS-B

486 BUSY

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>;tag=es43sd

[Alice's call is diverted to Carol]

F7 INVITE AS-B -> S-CSCF-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

P-Served-User: <sip:bob@example.com>; term; regstate=reg

[Forwarded leg to Carol is identified as an originating call after diversion that should not trigger all Bob's originating services]

F8 INVITE S-CSCF-B -> AS-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>

P-Served-User: <sip:bob@example.com>; orig-cdiv; regstate=reg

F9 INVITE AS-B -> S-CSCF-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Bob <sip:bob@example.com>


P-Served-User: <sip:bob@example.com>; orig-cdiv; regstate=reg


```
F10 INVITE S-CSCF-B -> Carol
INVITE sip:carol@192.0.2.7 SIP/2.0
  From: Alice <sip:alice@domaina.com>;tag=1928301774
  To: Bob <sip:bob@example.com>
```

Figure 1: P-Served-User during call diversion service

7.2. Call diversion and privacy

The following call flow shows a call diversion use case for which Alice has no identity restriction service and Bob has an unconditional call diversion service towards Carol and an identity presentation restriction service.

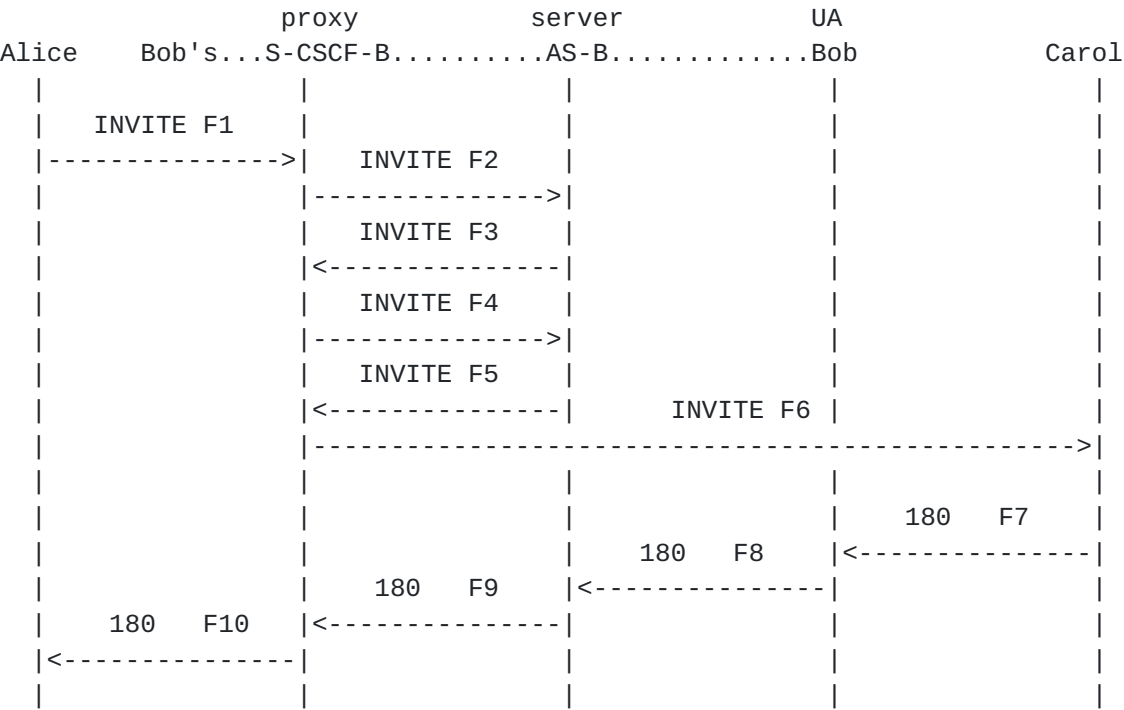

[Alice calls Bob]

```
F1 INVITE Alice -> S-CSCF-B
INVITE sip:bob@example.com SIP/2.0
  From: Alice <sip:alice@domaina.com>;tag=1928301774
  To: Bob <sip:bob@example.com>
  Supported: histinfo

F2 INVITE S-CSCF-B -> AS-B
INVITE sip:bob@example.com SIP/2.0
  From: Alice <sip:alice@domaina.com>;tag=1928301774
  To: Bob <sip:bob@example.com>
```


P-Served-User: <sip:bob@example.com>; term; regstate=reg

[Bob's unconditional call diversion to Carol is triggered]

F3 INVITE AS-B -> S-CSCF-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Carol <sip:carol@domainc.com>

P-Served-User: <sip:bob@example.com>; term; regstate=reg

History-Info:

<sip:bob@example.com>;index=1,

<sip:carol@domainc.com;cause=302>;index=1.1;mp=1

[Alice's call is diverted to Carol]

F4 INVITE S-CSCF-B -> AS-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Carol <sip:carol@domainc.com>

P-Served-User: <sip:bob@example.com>; orig-cdiv; regstate=reg

History-Info:

<sip:bob@example.com>;index=1,

<sip:carol@domainc.com;cause=302>;index=1.1;mp=1

F5 INVITE AS-B -> S-CSCF-B

INVITE sip:carol@domainc.com SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Carol <sip:carol@domainc.com>

P-Served-User: <sip:bob@example.com>; orig-cdiv; regstate=reg

History-Info:

<sip:bob@example.com?privacy=history>;index=1,

<sip:carol@domainc.com;cause=302>;index=1.1;mp=1

[Forwarded leg to Carol is identified as an originating call after diversion that allows to apply Bob's privacy request to his identity within the History-Info header field]

F6 INVITE S-CSCF-B -> Carol

INVITE sip:carol@192.0.2.7 SIP/2.0

From: Alice <sip:alice@domaina.com>;tag=1928301774

To: Carol <sip:carol@domainc.com>

History-Info:

<sip:bob@example.com?privacy=history>;index=1,

<sip:carol@domainc.com;cause=302>;index=1.1;mp=1

<sip:carol@192.0.2.7>;index=1.1.1;rc=1.1

Figure 2: P-Served-User when privacy requested

8. IANA Considerations

The syntax of the P-Served-User header field [[RFC5502](#)] is updated in [Section 4](#) of this document.

This document requests IANA to update the existing row for the P-Served-User header field in the "Header Fields" sub-registry within the "Session Initiation Protocol (SIP) Parameters" registry:

Header Name	Compact Form	Reference
-----	-----	-----
P-Served-User	none	[RFC5502][RFCXXXX]

Note to RFC Editor: Please replace XXXX with the RFC number of this document.

This document requests IANA to add new rows for the P-Served-User header field parameters in the "Header Field Parameters and Parameter Values" sub-registry within the "Session Initiation Protocol (SIP) Parameters" registry: as per the registry created by [[RFC3968](#)]:

Header Field	Parameter Name	Predefined Values	Reference
-----	-----	-----	-----
P-Served-User	sescase	Yes	[RFC5502]
P-Served-User	regstate	Yes	[RFC5502]
P-Served-User	orig-cdiv	No	[RFCXXXX]

Note to RFC Editor: Please replace XXXX with the RFC number of this document.

9. Security Considerations

The security considerations in [[RFC5502](#)] apply.

As the "orig-cdiv" parameter of P-Served-User header field can be used to trigger applications when a call is diverted, it is important to ensure that the parameter has not been added to the SIP message by an unauthorized SIP entity. Thus, the P-Served-User header field is to be used in a trusted environment and proxies MUST NOT insert the header unless they have sufficient knowledge that the route set includes another trusted proxy.

10. Acknowledgments

The author wishes to thank the 3GPP community for providing guidance, input, and comments on the document. Thanks to Dale Worley, Jean Mahoney and Ben Campbell for their careful review of the document. Thanks to Paul Kyzivat and Adam Roach. A special thanks to Christer Holmberg.

11. References

11.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3324] Watson, M., "Short Term Requirements for Network Asserted Identity", [RFC 3324](#), DOI 10.17487/RFC3324, November 2002, <<https://www.rfc-editor.org/info/rfc3324>>.
- [RFC3261] Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol", [RFC 3261](#), DOI 10.17487/RFC3261, June 2002, <<https://www.rfc-editor.org/info/rfc3261>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8217] Sparks, R., "Clarifications for When to Use the name-addr Production in SIP Messages", [RFC 8217](#), DOI 10.17487/RFC8217, August 2017, <<https://www.rfc-editor.org/info/rfc8217>>.
- [RFC3968] Camarillo, G., "The Internet Assigned Number Authority (IANA) Header Field Parameter Registry for the Session Initiation Protocol (SIP)", [BCP 98](#), [RFC 3968](#), DOI 10.17487/RFC3968, December 2004, <<https://www.rfc-editor.org/info/rfc3968>>.
- [RFC5234] Crocker, D., Ed. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, [RFC 5234](#), DOI 10.17487/RFC5234, January 2008, <<https://www.rfc-editor.org/info/rfc5234>>.

- [RFC7044] Barnes, M., Audet, F., Schubert, S., van Elburg, J., and C. Holmberg, "An Extension to the Session Initiation Protocol (SIP) for Request History Information", [RFC 7044](#), DOI 10.17487/RFC7044, February 2014, <<https://www.rfc-editor.org/info/rfc7044>>.
- [RFC5502] van Elburg, J., "The SIP P-Served-User Private-Header (P-Header) for the 3GPP IP Multimedia (IM) Core Network (CN) Subsystem", [RFC 5502](#), DOI 10.17487/RFC5502, April 2009, <<https://www.rfc-editor.org/info/rfc5502>>.

11.2. Informative References

- [TS.3GPP.24.229]
3GPP, "IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP);Stage 3", 3GPP TS 24.229 v11.
- [TS.3GPP.29.228]
3GPP, "IP Multimedia (IM) Subsystem Cx and Dx interfaces; Signalling flows and message contents", 3GPP TS 29.228 v11.

Author's Address

Marianne Mohali
Orange
Orange Gardens, 44 avenue de la Republique
Chatillon 92326
France

Email: marianne.mohali@orange.com

