

Francois Le Faucheur, Editor
Cisco Systems, Inc.

IETF Internet Draft

Expires: March, 2004

Document: [draft-ietf-tewg-diff-te-russian-04.txt](#)

September, 2003

Russian Dolls Bandwidth Constraints Model for Diff-Serv-aware MPLS Traffic Engineering

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#). Internet-Drafts are Working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

Abstract

This document provides specification for one Bandwidth Constraints model for Diff-Serv-aware MPLS Traffic Engineering, which is referred to as the Russian Dolls Model.

Summary for Sub-IP related Internet Drafts

RELATED DOCUMENTS:

[draft-ietf-tewg-diff-te-reqts-07.txt](#)
[draft-ietf-tewg-diff-te-proto-04.txt](#)

WHERE DOES IT FIT IN THE PICTURE OF THE SUB-IP WORK

This ID is a Working Group document of the TE Working Group.

WHY IS IT TARGETED AT THIS WG(s)

TEWG is responsible for specifying protocol extensions for support of

JUSTIFICATION

The TEWG charter states that "This will entail verification and review of the Diffserv requirements in the WG Framework document and initial specification of how these requirements can be met through use and potentially expansion of existing protocols."

In line with this, the TEWG is specifying bandwidth constraints model for Diff-Serv-aware MPLS Traffic Engineering. This document describes one particular bandwidth constraints model.

Specification of Requirements

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

1. Introduction

[DSTE-REQ] presents the Service Providers requirements for support of Diff-Serv-aware MPLS Traffic Engineering (DS-TE). This includes the fundamental requirement to be able to enforce different bandwidth constraints for different classes of traffic.

[DSTE-REQ] also defines the concept of Bandwidth Constraint Models for DS-TE and states that "The DS-TE technical solution MUST specify at least one bandwidth constraint model and MAY specify multiple bandwidth constraint."

This document provides a detailed description of one particular Bandwidth Constraint model for DS-TE which is introduced in [DSTE-REQ] and called the Russian Dolls Model (RDM).

[DSTE-PROTO] specifies the IGP and RSVP-TE signaling extensions for support of DS-TE. These extensions support RDM.

2. Contributing Authors

This document was the collective work of several. The text and content of this document was contributed by the editor and the co-authors listed below. (The contact information for the editor appears in [Section 11](#), and is not repeated below.)

Jim Boyle
Protocol Driven Networks, Inc.
1381 Kildaire Farm Road #288
Cary, NC 27511, USA
Phone: (919) 852-5160
Email: jboyle@pdnets.com

Kireeti Kompella
Juniper Networks, Inc.
1194 N. Mathilda Ave.
Sunnyvale, CA 94099
Email: kireeti@juniper.net

Le Faucheur et. al

2

Russian Dolls Model for DS-TE

September 2003

William Townsend
Tenor Networks
100 Nagog Park
Acton, MA 01720
Phone: +1-978-264-4900
Email:
btownsend@tenornetworks.com

Thomas D. Nadeau
Cisco Systems, Inc.
250 Apollo Drive
Chelmsford, MA 01824
Phone: +1-978-244-3051
Email: tnadeau@cisco.com

Darek Skalecki
Nortel Networks
3500 Carling Ave,
Nepean K2H 8E9
Phone: +1-613-765-2252
Email: dareks@nortelnetworks.com

3. Definitions

For readability a number of definitions from [[DSTE-REQ](#)] are repeated here:

Class-Type (CT): the set of Traffic Trunks crossing a link that is governed by a specific set of Bandwidth Constraints. CT is used for the purposes of link bandwidth allocation, constraint based routing

and admission control. A given Traffic Trunk belongs to the same CT on all links.

TE-Class: A pair of:

- i. a Class-Type
- ii. a preemption priority allowed for that Class-Type. This means that an LSP transporting a Traffic Trunk from that Class-Type can use that preemption priority as the set-up priority, as the holding priority or both.

A number of recovery mechanisms under investigation or specification in the IETF take advantage of the concept of bandwidth sharing across particular sets of LSPs. "Shared Mesh Restoration" in [[GMPLS-RECOV](#)] and "Facility-based Computation Model" in [[MPLS-BACKUP](#)] are example mechanisms which increase bandwidth efficiency by sharing bandwidth across backup LSPs protecting against independent failures. To ensure that the notion of "Reserved (CTc)" introduced in [[DSTE-REQ](#)] is compatible with such a concept of bandwidth sharing across multiple LSPs, the wording of the "Reserved (CTc)" definition provided in [[DSTE-REQ](#)] is generalized into the following:

Reserved (CTc): For a given Class-Type CTc ($0 \leq c \leq \text{MaxCT}$), let us define "Reserved(CTc)" as the total amount of the bandwidth reserved by all the established LSPs which belong to CTc.

With this generalization, the Russian Dolls Model definition provided in this document is compatible with Shared Mesh Restoration defined

Le Faucheur et. al

3

Russian Dolls Model for DS-TE

September 2003

in [[GMPLS-RECOV](#)], so that DS-TE and Shared Mesh Protection can operate simultaneously, under the assumption that Shared Mesh Restoration operates independently within each DS-TE Class-Type and does not operate across Class-Types (for example back up LSPs protecting Primary LSPs of CTx must also belong to CTx; Excess Traffic LSPs sharing bandwidth with Backup LSPs of CTx must also belong to CTx).

We also introduce the following definition:

Reserved(CTb,q) : let us define "Reserved(CTb,q)" as the total amount

of the bandwidth reserved by all the established LSPs which belong to CT_b and have a holding priority of q. Note that if q and CT_b do not form one of the 8 possible configured TE-Classes, then there can not be any established LSP which belong to CT_b and have a holding priority of q, so in that case, Reserved(CT_b,q)=0.

4. Russian Dolls Model Definition

RDM is defined in the following manner:

- o Maximum Number of Bandwidth Constraints (MaxBC)=
Maximum Number of Class-Types (MaxCT) = 8
- o for each value of b in the range $0 \leq b \leq (\text{MaxCT} - 1)$:
SUM (Reserved (CT_c)) \leq BC_b,
Where the SUM is across all values of c in the
range $b \leq c \leq (\text{MaxCT} - 1)$
- o BC₀= Maximum Reservable Bandwidth, so that
SUM (Reserved(CT_c)) \leq Max-Reservable-Bw,
where the SUM is across all values of c in the
range $0 \leq c \leq (\text{MaxCT} - 1)$


A DS-TE LSR implementing RDM MUST support enforcement of bandwidth constraints in compliance with this definition.

Both preemption within a Class-Type and across Class-Types is allowed.

Where 8 Class-Types are active, the RDM bandwidth constraints can also be expressed in the following way:

- All LSPs from CT₇ use no more than BC₇
- All LSPs from CT₆ and CT₇ use no more than BC₆
- All LSPs from CT₅, CT₆ and CT₇ use no more than BC₅
- etc.
- All LSPs from CT₀, CT₁,... CT₇ use no more than
BC₀ = "Maximum Reservable Bandwidth"

Purely for illustration purposes, the diagram below represents the Russian Doll Bandwidth Constraints model in a pictorial manner when 3 Class-Types are active:

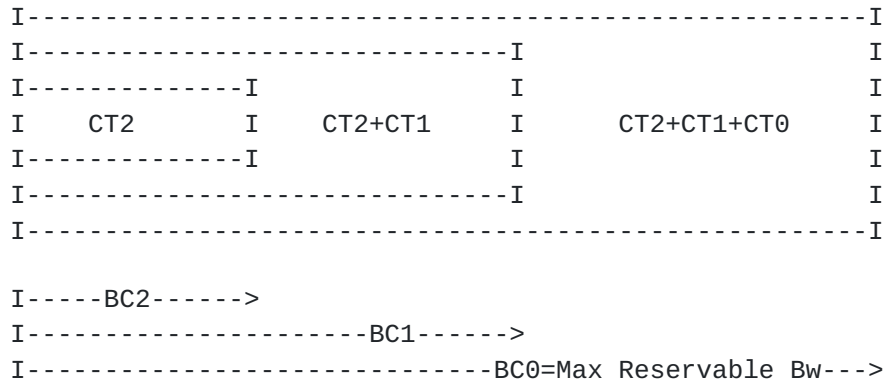

While simpler Bandwidth Constraints models or, conversely, more flexible/sophisticated Bandwidth Constraints models can be defined, the Russian Dolls Model is attractive in some DS-TE environments for the following reasons:

- Although a little less intuitive than the Maximum Allocation Model (see[DSTE-MAM]), RDM is still a simple model to conceptualize.
- RDM can be used to simultaneously ensure bandwidth efficiency and protection against QoS degradation of all Class-Types, whether preemption is used or not.
- RDM can be used in conjunction with preemption to simultaneously achieve isolation across Class-Types (so that each Class-Type is guaranteed its share of bandwidth no matter the level of contention by other classes), bandwidth efficiency and protection against QoS degradation of all Class-Types.
- RDM only requires limited protocol extensions such as the ones defined in [[DSTE-PROTO](#)].

RDM may not be attractive in some DS-TE environments for the following reasons:

- if the usage of preemption is precluded for some administrative reason, while RDM can still ensure bandwidth efficiency and protection against QoS degradation of all CTs, RDM cannot guarantee isolation across Class-Types.

Additional considerations on the properties of RDM can be found in [[BC-CONS](#)] and [[BC-MODEL](#)].

As a simple example usage of the "Russian Doll" Bandwidth Constraints Model, a network administrator using one CT for Voice (CT1) and one

CT for data (CT0) might configure on a given link:

- BC0 = Max-Reservable-Bw= 2.5 Gb/s (i.e. Voice + Data is limited to 2.5 Gb/s)

Le Faucheur et. al

5

Russian Dolls Model for DS-TE

September 2003

- BC1= 1.5 Gb/s (i.e. Voice is limited to 1.5 Gb/s).

5. Example Formulas for Computing "Unreserved TE-Class [i]" with Russian Dolls Model

As specified in [[DSTE-PROTO](#)], formulas for computing "Unreserved TE-Class [i]" MUST reflect all of the Bandwidth Constraints relevant to the CT associated with TE-Class[i], and thus, depend on the Bandwidth Constraints Model. Thus, a DS-TE LSR implementing RDM MUST reflect the RDM bandwidth constraints defined in [section 4](#) above when computing "Unreserved TE-Class [i]".

Keeping in mind, as explained in [[DSTE-PROTO](#)], that details of admission control algorithms as well as formulas for computing "Unreserved TE-Class [i]" are outside the scope of the IETF work, we provide in this section, for illustration purposes, an example of how values for the unreserved bandwidth for TE-Class[i] might be computed with RDM, assuming the basic admission control algorithm which simply deducts the exact bandwidth of any established LSP from all of the Bandwidth Constraints relevant to the CT associated with that LSP.

We assume that:

TE-Class [i] <--> < CTc , preemption p >
in the configured TE-Class mapping.

For readability, formulas are first shown assuming only 3 CTs are active. The formulas are then extended to cover the cases where more CTs are used.

If CTc = CT0, then "Unreserved TE-Class [i]" =
[BC0 - SUM (Reserved(CTb,q))] for q <= p and 0 <= b <= 2

If CTc = CT1, then "Unreserved TE-Class [i]" =
MIN [

$$\begin{aligned} & [BC1 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 1 \leq b \leq 2, \\ & [BC0 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 0 \leq b \leq 2 \\ &] \end{aligned}$$

If $CT_c = CT_2$, then "Unreserved TE-Class [i]" =

$$\begin{aligned} & \text{MIN} [\\ & [BC2 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 2 \leq b \leq 2, \\ & [BC1 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 1 \leq b \leq 2, \\ & [BC0 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 0 \leq b \leq 2 \\ &] \end{aligned}$$

The formula can be generalized to 8 active CTs and expressed in a more compact way in the following:

Le Faucheur et. al

6

Russian Dolls Model for DS-TE

September 2003

$$\begin{aligned} & \text{"Unreserved TE-Class [i]" =} \\ & \text{MIN} [\\ & [BC_c - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } c \leq b \leq 7, \\ & [BC(c-1) - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } (c-1) \leq b \leq 7, \\ & \quad \cdot \quad \cdot \quad \cdot \\ & [BC0 - \text{SUM} (\text{Reserved}(CTb, q))] \text{ for } q \leq p \text{ and } 0 \leq b \leq 7, \\ &] \end{aligned}$$

where:

TE-Class [i] \leftrightarrow $\langle CT_c, \text{preemption } p \rangle$
in the configured TE-Class mapping.

6. Receiving both Maximum Reservable Bandwidth and Bandwidth Constraints sub-TLVs

[DSTE-PROTO] states that

" A DS-TE LSR which does advertise Bandwidth Constraints MUST use the new "Bandwidth Constraints" sub-TLV (in addition to the existing Maximum Reservable Bandwidth sub-TLV) to do so."

With RDM, BC_0 is equal to the Maximum Reservable Bandwidth since they both represent the aggregate constraint across all Class-Types. Thus, a DS-TE LSR receiving both the "Maximum Reservable Bw" sub-TLV and

the new "Bandwidth Constraints" sub-TLV (which contains BC0) for a given link where the RDM model is used, MAY ignore the "Maximum Reservable Bw" sub-TLV.

7. Security Considerations

Security considerations related to the use of DS-TE are discussed in [[DSTE-PROTO](#)]. Those apply independently of the Bandwidth Constraints model, including RDM specified in this document.

8. Acknowledgments

We thank Martin Tatham for his key contribution in this work. Tatiana Renko is also warmly thanked for her instantiation of the Russian Doll.

9. Normative References

[DSTE-REQ] Le Faucheur et al, Requirements for support of Diff-Serv-aware MPLS Traffic Engineering, [RFC3564](#).

[DSTE-PROTO] Le Faucheur et al, Protocol extensions for support of Diff-Serv-aware MPLS Traffic Engineering, [draft-ietf-tewg-diff-te-proto-05.txt](#), September 2003.

Le Faucheur et. al

7

Russian Dolls Model for DS-TE September 2003

[RFC2119] S. Bradner, Key words for use in RFCs to Indicate Requirement Levels, [RFC2119](#), March 1997.

10. Informative References

[BC-CONS] Le Faucheur, "Considerations on Bandwidth Constraints Model for DS-TE", [draft-lefaucheur-tewg-russian-dolls-00.txt](#), June 2002.

[BC-MODEL] Lai, "Bandwidth Constraints Models for DS-TE",

[draft-wlai-tewg-bcmodel-00.txt](#), June 2002.

[DSTE-MAM] Le Faucheur, Lai, "Maximum Allocation Bandwidth Constraints Model for Diff-Serv-aware MPLS Traffic Engineering", [draft-ietf-tewg-diff-tet-mam-01.txt](#), September 2003.

[DSTE-MAR] Ash, "Max Allocation with Reservation Bandwidth Constraint Model for MPLS/DiffServ TE & Performance Comparisons", March 2003.

[OSPF-TE] Katz et al., "Traffic Engineering Extensions to OSPF", [draft-katz-yeung-ospf-traffic-10.txt](#), June 2003.

[ISIS-TE] Smit et al., "IS-IS extensions for Traffic Engineering", [draft-ietf-isis-traffic-05.txt](#), August 2003.

[RSVP-TE] Awduche et al., "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.

[DIFF-MPLS] Le Faucheur et al, "MPLS Support of Diff-Serv", [RFC3270](#), May 2002.

[GMPLS-RECOV] Lang et al, "Generalized MPLS Recovery Functional Specification", [draft-ietf-ccamp-gmpls-recovery-functional-00.txt](#), January 2003.

[MPLS-BACKUP] Vasseur et al, "MPLS Traffic Engineering Fast reroute: bypass tunnel path computation for bandwidth protection", [draft-vasseur-mpls-backup-computation-02.txt](#), February 2003.

11. Intellectual Property Considerations

Cisco Systems, Inc. may seek patent or other intellectual property protection for some of all of the technologies disclosed in this document. If any standards arising from this document are or become protected by one or more patents assigned to Cisco Systems, Cisco Systems intends to disclose those patents and license them on reasonable and non-discriminatory terms.

12. Editor's Address:

Le Faucheur et. al

Francois Le Faucheur
Cisco Systems, Inc.
Village d'Entreprise Green Side - Batiment T3
400, Avenue de Roumanille
06410 Biot-Sophia Antipolis
France
Phone: +33 4 97 23 26 19
Email: flefauch@cisco.com

Appendix A - Addressing [\[DSTE-REQ\]](#) Scenarios

This Appendix provides examples of how the Russian Dolls Bandwidth Constraints model can be used to support each of the scenarios described in [\[DSTE-REQ\]](#).

1. Scenario 1: Limiting Amount of Voice

By configuring on every link:

- Bandwidth Constraint 1 (for CT1=Voice) = "certain percentage" of link capacity
- BC0 (for CT1=Voice + CT0= Data) = link capacity

By configuring:

- every CT1/Voice TE-LSP with preemption =0
- every CT0/Data TE-LSP with preemption =1

DS-TE with the Russian Dolls Model will address all the requirements:

- amount of Voice traffic limited to desired percentage on every link
- data traffic capable of using all remaining link capacity
- voice traffic capable of preempting other traffic

2. Scenario 2: Maintain Relative Proportion of Traffic Classes

By configuring on every link:

- BC2 (for CT2) = e.g. 45%
- BC1 (for CT1+CT2) = e.g. 80%
- BC0 (for CT0+CT1+CT2) = e.g.100%

DS-TE with the Russian Dolls Model will ensure that the amount of traffic of each Class Type established on a link is within acceptable levels as compared to the resources allocated to the corresponding Diff-Serv PHBs regardless of which order the LSPs are routed in, regardless of which preemption priorities are used by which LSPs and regardless of failure situations.

By also configuring:

- every CT2/Voice TE-LSP with preemption =0

- every CT1/Premium Data TE-LSP with preemption =1
- every CT0/Best-Effort TE-LSP with preemption =2

Russian Dolls Model for DS-TE September 2003

DS-TE with the Russian Dolls Model will also ensure that:

- CT2 Voice LSPs always have first preemption priority in order to use the CT2 capacity
- CT1 Premium Data LSPs always have second preemption priority in order to use the CT1 capacity
- Best-Effort can use up to link capacity whatever is left by CT2 and CT1.

Optional automatic adjustment of Diff-Serv scheduling configuration could be used for maintaining very strict relationship between amount of established traffic of each Class Type and corresponding Diff-Serv resources.

3. Scenario 3: Guaranteed Bandwidth Services

By configuring on every link:

- BC1 (for CT1) = "given" percentage of link bandwidth (appropriate to achieve the Guaranteed Bandwidth service's QoS objectives)
- BC0 (for CT0+CT1) = 100% of link bandwidth

DS-TE with the Russian Dolls Model will ensure that the amount of Guaranteed Bandwidth Traffic established on every link remains below the given percentage so that it will always meet its QoS objectives. At the same time it will allow traffic engineering of the rest of the traffic such that links can be filled up.

