

Network Working Group  
Internet-Draft  
Updates: [6204](#) (if approved)  
Intended status: Informational  
Expires: May 3, 2012

H. Singh  
W. Beebee  
Cisco Systems, Inc.  
C. Donley  
CableLabs  
B. Stark  
AT&T  
O. Troan, Ed.  
Cisco Systems, Inc.  
October 31, 2011

**Basic Requirements for IPv6 Customer Edge Routers**  
**draft-ietf-v6ops-6204bis-02**

Abstract

This document specifies requirements for an IPv6 Customer Edge (CE) router. Specifically, the current version of this document focuses on the basic provisioning of an IPv6 CE router and the provisioning of IPv6 hosts attached to it. The document also covers IP transition technologies and transition technologies coexistence. Two transition technologies in [RFC 5969](#)'s 6rd and [RFC 6333](#)'s DS-Lite. are covered in the document.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 3, 2012.

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal

## Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction . . . . .</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Requirements Language . . . . .</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Terminology . . . . .</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Architecture . . . . .</a>	<a href="#">4</a>
<a href="#">3.1.</a>	<a href="#">Current IPv4 End-User Network Architecture . . . . .</a>	<a href="#">4</a>
<a href="#">3.2.</a>	<a href="#">IPv6 End-User Network Architecture . . . . .</a>	<a href="#">5</a>
<a href="#">3.2.1.</a>	<a href="#">Local Communication . . . . .</a>	<a href="#">6</a>
<a href="#">4.</a>	<a href="#">Requirements . . . . .</a>	<a href="#">7</a>
<a href="#">4.1.</a>	<a href="#">General Requirements . . . . .</a>	<a href="#">7</a>
<a href="#">4.2.</a>	<a href="#">WAN-Side Configuration . . . . .</a>	<a href="#">8</a>
<a href="#">4.3.</a>	<a href="#">LAN-Side Configuration . . . . .</a>	<a href="#">11</a>
<a href="#">4.4.</a>	<a href="#">Transition Technologies Support . . . . .</a>	<a href="#">13</a>
<a href="#">4.4.1.</a>	<a href="#">6rd . . . . .</a>	<a href="#">13</a>
<a href="#">4.4.2.</a>	<a href="#">Dual-Stack Lite(DS-Lite) . . . . .</a>	<a href="#">14</a>
<a href="#">4.4.3.</a>	<a href="#">Transition Technologies Coexistence . . . . .</a>	<a href="#">15</a>
<a href="#">4.5.</a>	<a href="#">Security Considerations . . . . .</a>	<a href="#">16</a>
<a href="#">5.</a>	<a href="#">Acknowledgements . . . . .</a>	<a href="#">16</a>
<a href="#">6.</a>	<a href="#">Contributors . . . . .</a>	<a href="#">17</a>
<a href="#">7.</a>	<a href="#">References . . . . .</a>	<a href="#">17</a>
<a href="#">7.1.</a>	<a href="#">Normative References . . . . .</a>	<a href="#">17</a>
<a href="#">7.2.</a>	<a href="#">Informative References . . . . .</a>	<a href="#">20</a>
<a href="#">Appendix A.</a>	<a href="#">Changes from <a href="#">RFC 6204</a> . . . . .</a>	<a href="#">20</a>
	<a href="#">Authors' Addresses . . . . .</a>	<a href="#">21</a>



## **1. Introduction**

This document defines basic IPv6 features for a residential or small-office router, referred to as an IPv6 CE router. Typically, these routers also support IPv4.

Mixed environments of dual-stack hosts and IPv6-only hosts (behind the CE router) can be more complex if the IPv6-only devices are using a translator to access IPv4 servers [[RFC6144](#)]. Support for such mixed environments is not in scope of this document.

This document specifies how an IPv6 CE router automatically provisions its WAN interface, acquires address space for provisioning of its LAN interfaces, and fetches other configuration information from the service provider network. Automatic provisioning of more complex topology than a single router with multiple LAN interfaces is out of scope for this document.

See [[RFC4779](#)] for a discussion of options available for deploying IPv6 in service provider access networks.

The document also covers IP transition technologies and transition technologies coexistence. Two transition technologies in 6rd [[RFC5969](#)] and DS-Lite [[RFC6333](#)] are covered in the document. At the time of writing this document these were the only two transition technologies available in RFC form to be included in this document.

### **1.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## **2. Terminology**

End-User Network                      one or more links attached to the IPv6 CE router that connect IPv6 hosts.

IPv6 Customer Edge Router            a node intended for home or small-office use that forwards IPv6 packets not explicitly addressed to itself. The IPv6 CE router connects the end-user network to a service provider network.



IPv6 Host	any device implementing an IPv6 stack receiving IPv6 connectivity through the IPv6 CE router.
LAN Interface	an IPv6 CE router's attachment to a link in the end-user network. Examples are Ethernets (simple or bridged), 802.11 wireless, or other LAN technologies. An IPv6 CE router may have one or more network-layer LAN interfaces.
Service Provider	an entity that provides access to the Internet. In this document, a service provider specifically offers Internet access using IPv6, and may also offer IPv4 Internet access. The service provider can provide such access over a variety of different transport methods such as DSL, cable, wireless, and others.
WAN Interface	an IPv6 CE router's attachment to a link used to provide connectivity to the service provider network; example link technologies include Ethernets (simple or bridged), PPP links, Frame Relay, or ATM networks, as well as Internet-layer (or higher-layer) "tunnels", such as tunnels over IPv4 or IPv6 itself.

### **3. Architecture**

#### **3.1. Current IPv4 End-User Network Architecture**

An end-user network will likely support both IPv4 and IPv6. It is not expected that an end-user will change their existing network topology with the introduction of IPv6. There are some differences in how IPv6 works and is provisioned; these differences have implications for the network architecture. A typical IPv4 end-user network consists of a "plug and play" router with NAT functionality and a single link behind it, connected to the service provider network.

A typical IPv4 NAT deployment by default blocks all incoming connections. Opening of ports is typically allowed using a Universal Plug and Play Internet Gateway Device (UPnP IGD) [[UPnP-IGD](#)] or some other firewall control protocol.



Another consequence of using private address space in the end-user network is that it provides stable addressing; i.e., it never changes even when you change service providers, and the addresses are always there even when the WAN interface is down or the customer edge router has not yet been provisioned.

Rewriting addresses on the edge of the network also allows for some rudimentary multihoming, even though using NATs for multihoming does not preserve connections during a fail-over event [[RFC4864](#)].

Many existing routers support dynamic routing, and advanced end-users can build arbitrary, complex networks using manual configuration of address prefixes combined with a dynamic routing protocol.

### 3.2. IPv6 End-User Network Architecture

The end-user network architecture for IPv6 should provide equivalent or better capabilities and functionality than the current IPv4 architecture.

The end-user network is a stub network. Figure 1 illustrates the model topology for the end-user network.

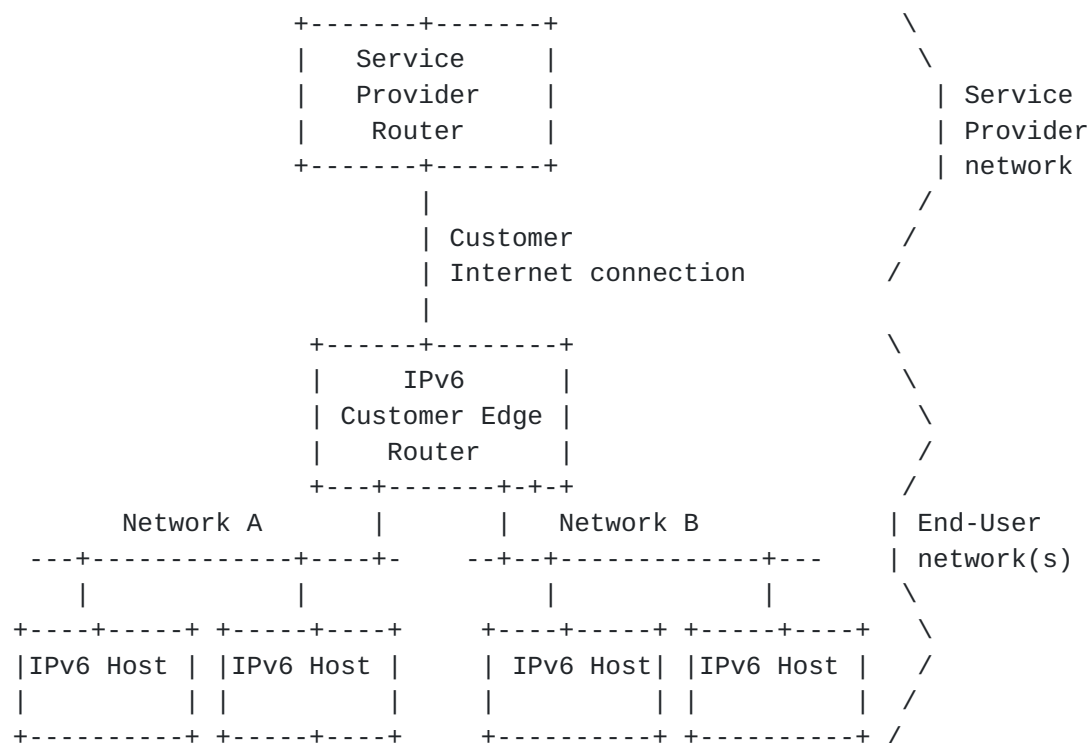


Figure 1: An Example of a Typical End-User Network

This architecture describes the:





- o Basic capabilities of an IPv6 CE router
- o Provisioning of the WAN interface connecting to the service provider
- o Provisioning of the LAN interfaces

For IPv6 multicast traffic, the IPv6 CE router may act as a Multicast Listener Discovery (MLD) proxy [[RFC4605](#)] and may support a dynamic multicast routing protocol.

The IPv6 CE router may be manually configured in an arbitrary topology with a dynamic routing protocol. Automatic provisioning and configuration are described for a single IPv6 CE router only.

### **3.2.1. Local Communication**

Link-local IPv6 addresses are used by hosts communicating on a single link. Unique Local IPv6 Unicast Addresses (ULAs) [[RFC4193](#)] are used by hosts communicating within the end-user network across multiple links, but without requiring the application to use a globally routable address. The IPv6 CE router defaults to acting as the demarcation point between two networks by providing a ULA boundary, a multicast zone boundary, and ingress and egress traffic filters.

A dual-stack host is multihomed to IPv4 and IPv6 networks. The IPv4 and IPv6 topologies may not be congruent, and different addresses may have different reachability, e.g., ULAs. A host stack has to be able to quickly fail over and try a different source address and destination address pair if communication fails, as outlined in [[HAPPY-EYEBALLS](#)].

At the time of this writing, several host implementations do not handle the case where they have an IPv6 address configured and no IPv6 connectivity, either because the address itself has a limited topological reachability (e.g., ULA) or because the IPv6 CE router is not connected to the IPv6 network on its WAN interface. To support host implementations that do not handle multihoming in a multi-prefix environment [[MULTIHOMING-WITHOUT-NAT](#)], the IPv6 CE router should not, as detailed in the requirements below, advertise itself as a default router on the LAN interface(s) when it does not have IPv6 connectivity on the WAN interface or when it is not provisioned with IPv6 addresses. For local IPv6 communication, the mechanisms specified in [[RFC4191](#)] are used.

ULA addressing is useful where the IPv6 CE router has multiple LAN interfaces with hosts that need to communicate with each other. If the IPv6 CE router has only a single LAN interface (IPv6 link), then



link-local addressing can be used instead.

In the event that more than one IPv6 CE router is present on the LAN, then coexistence with IPv4 requires all of them to conform to these recommendations, especially requirements ULA-5 and L-4 below.

## **4. Requirements**

### **4.1. General Requirements**

The IPv6 CE router is responsible for implementing IPv6 routing; that is, the IPv6 CE router must look up the IPv6 destination address in its routing table to decide to which interface it should send the packet.

In this role, the IPv6 CE router is responsible for ensuring that traffic using its ULA addressing does not go out the WAN interface, and does not originate from the WAN interface.

- G-1: An IPv6 CE router is an IPv6 node according to the IPv6 Node Requirements [[RFC4294](#)] specification.
- G-2: The IPv6 CE router MUST implement ICMPv6 according to [[RFC4443](#)]. In particular, point-to-point links MUST be handled as described in [Section 3.1 of \[RFC4443\]](#).
- G-3: The IPv6 CE router MUST NOT forward any IPv6 traffic between its LAN interface(s) and its WAN interface until the router has successfully completed the IPv6 address acquisition process.
- G-4: By default, an IPv6 CE router that has no default router(s) on its WAN interface MUST NOT advertise itself as an IPv6 default router on its LAN interfaces. That is, the "Router Lifetime" field is set to zero in all Router Advertisement messages it originates [[RFC4861](#)].
- G-5: By default, if the IPv6 CE router is an advertising router and loses its IPv6 default router(s) and/or detects loss of connectivity on the WAN interface, it MUST explicitly invalidate itself as an IPv6 default router on each of its advertising interfaces by immediately transmitting one or more Router Advertisement messages with the "Router Lifetime" field set to zero [[RFC4861](#)].



## **4.2. WAN-Side Configuration**

The IPv6 CE router will need to support connectivity to one or more access network architectures. This document describes an IPv6 CE router that is not specific to any particular architecture or service provider and that supports all commonly used architectures.

IPv6 Neighbor Discovery and DHCPv6 protocols operate over any type of IPv6-supported link layer, and there is no need for a link-layer-specific configuration protocol for IPv6 network-layer configuration options as in, e.g., PPP IP Control Protocol (IPCP) for IPv4. This section makes the assumption that the same mechanism will work for any link layer, be it Ethernet, the Data Over Cable Service Interface Specification (DOCSIS), PPP, or others.

WAN-side requirements:

- W-1: When the router is attached to the WAN interface link, it MUST act as an IPv6 host for the purposes of stateless [[RFC4862](#)] or stateful [[RFC3315](#)] interface address assignment.
- W-2: The IPv6 CE router MUST generate a link-local address and finish Duplicate Address Detection according to [[RFC4862](#)] prior to sending any Router Solicitations on the interface. The source address used in the subsequent Router Solicitation MUST be the link-local address on the WAN interface.
- W-3: Absent other routing information, the IPv6 CE router MUST use Router Discovery as specified in [[RFC4861](#)] to discover a default router(s) and install default route(s) in its routing table with the discovered router's address as the next hop.
- W-4: The router MUST act as a requesting router for the purposes of DHCPv6 prefix delegation ([[RFC3633](#)]).
- W-5: DHCPv6 address assignment (IA\_NA) and DHCPv6 prefix delegation (IA\_PD) SHOULD be done as a single DHCPv6 session.
- W-6: The IPv6 CE router MUST use a persistent DHCP Unique Identifier (DUID) for DHCPv6 messages. The DUID MUST NOT change between network interface resets or IPv6 CE router reboots.

Link-layer requirements:

- WLL-1: If the WAN interface supports Ethernet encapsulation, then the IPv6 CE router MUST support IPv6 over Ethernet [[RFC2464](#)].



- WLL-2: If the WAN interface supports PPP encapsulation, the IPv6 CE router MUST support IPv6 over PPP [[RFC5072](#)].
- WLL-3: If the WAN interface supports PPP encapsulation, in a dual-stack environment with IPCP and IPV6CP running over one PPP logical channel, the Network Control Protocols (NCPs) MUST be treated as independent of each other and start and terminate independently.

Address assignment requirements:

- WAA-1: The IPv6 CE router MUST support Stateless Address Autoconfiguration (SLAAC) [[RFC4862](#)].
- WAA-2: The IPv6 CE router MUST follow the recommendations in [Section 4 of \[RFC5942\]](#), and in particular the handling of the L flag in the Router Advertisement Prefix Information option.
- WAA-3: The IPv6 CE router MUST support DHCPv6 [[RFC3315](#)] client behavior.
- WAA-4: The IPv6 CE router MUST be able to support the following DHCPv6 options: IA\_NA, Reconfigure Accept [[RFC3315](#)], and DNS\_SERVERS [[RFC3646](#)].
- WAA-5: The IPv6 CE router SHOULD support the DHCPv6 Simple Network Time Protocol (SNTP) option [[RFC4075](#)] and the Information Refresh Time option [[RFC4242](#)].
- WAA-6: If the IPv6 CE router receives a Router Advertisement message (described in [[RFC4861](#)]) with the M flag set to 1, the IPv6 CE router MUST do DHCPv6 address assignment (request an IA\_NA option).
- WAA-7: If the IPv6 CE router does not acquire global IPv6 address(es) from either SLAAC or DHCPv6, then it MUST create global IPv6 address(es) from its delegated prefix(es) and configure those on one of its internal virtual network interfaces unless configured to require a global IPv6 address on the WAN interface.
- WAA-8: The IPv6 CE router MUST set SOL\_MAX\_RT (specified by [[RFC3315](#)]) to 7200 seconds.
- WAA-9: As a router, the IPv6 CE router MUST follow the weak host (Weak ES) model [[RFC1122](#)]. When originating packets from an interface, it will use a source address from another one of its interfaces if the outgoing interface does not have an





address of suitable scope.

Prefix delegation requirements:

- WPD-1: The IPv6 CE router MUST support DHCPv6 prefix delegation requesting router behavior as specified in [[RFC3633](#)] (IA\_PD option).
- WPD-2: The IPv6 CE router MAY indicate as a hint to the delegating router the size of the prefix it requires. If so, it MUST ask for a prefix large enough to assign one /64 for each of its interfaces, rounded up to the nearest nibble, and SHOULD be configurable to ask for more.
- WPD-3: The IPv6 CE router MUST be prepared to accept a delegated prefix size different from what is given in the hint. If the delegated prefix is too small to address all of its interfaces, the IPv6 CE router SHOULD log a system management error.
- WPD-4: By default, the IPv6 CE router MUST initiate DHCPv6 prefix delegation when either the M or O flags are set to 1 in a received Router Advertisement message.
- WPD-5: If the IPv6 CE router is configured to initiate DHCPv6 before receiving a Router Advertisement, it MUST also request an IA\_NA option in DHCPv6.
- WPD-6: If the delegated prefix(es) are aggregate route(s) of multiple, more-specific routes, the IPv6 CE router MUST discard packets that match the aggregate route(s), but not any of the more-specific routes. In other words, the next hop for the aggregate route(s) should be the null destination. This is necessary to prevent forwarding loops when some addresses covered by the aggregate are not reachable [[RFC4632](#)].
- (a) The IPv6 CE router SHOULD send an ICMPv6 Destination Unreachable message in accordance with [Section 3.1 of \[RFC4443\]](#) back to the source of the packet, if the packet is to be dropped due to this rule.
- WPD-7: If the IPv6 CE router requests both an IA\_NA and an IA\_PD option in DHCPv6, it MUST accept an IA\_PD option in DHCPv6 Advertise/Reply messages, even if the message does not contain any addresses, unless configured to only obtain its WAN IPv6 address via DHCPv6.



WPD-8: By default, an IPv6 CE router MUST NOT initiate any dynamic routing protocol on its WAN interface.

#### **4.3. LAN-Side Configuration**

The IPv6 CE router distributes configuration information obtained during WAN interface provisioning to IPv6 hosts and assists IPv6 hosts in obtaining IPv6 addresses. It also supports connectivity of these devices in the absence of any working WAN interface.

An IPv6 CE router is expected to support an IPv6 end-user network and IPv6 hosts that exhibit the following characteristics:

1. Link-local addresses may be insufficient for allowing IPv6 applications to communicate with each other in the end-user network. The IPv6 CE router will need to enable this communication by providing globally scoped unicast addresses or ULAs [[RFC4193](#)], whether or not WAN connectivity exists.
2. IPv6 hosts should be capable of using SLAAC and may be capable of using DHCPv6 for acquiring their addresses.
3. IPv6 hosts may use DHCPv6 for other configuration information, such as the DNS\_SERVERS option for acquiring DNS information.

Unless otherwise specified, the following requirements apply to the IPv6 CE router's LAN interfaces only.

ULA requirements:

- ULA-1: The IPv6 CE router SHOULD be capable of generating a ULA prefix [[RFC4193](#)].
- ULA-2: An IPv6 CE router with a ULA prefix MUST maintain this prefix consistently across reboots.
- ULA-3: The value of the ULA prefix SHOULD be user-configurable.
- ULA-4: By default, the IPv6 CE router MUST act as a site border router according to [Section 4.3 of \[RFC4193\]](#) and filter packets with local IPv6 source or destination addresses accordingly.
- ULA-5: An IPv6 CE router MUST NOT advertise itself as a default router with a Router Lifetime greater than zero whenever all of its configured and delegated prefixes are ULA prefixes.

LAN requirements:



- L-1: The IPv6 CE router MUST support router behavior according to Neighbor Discovery for IPv6 [[RFC4861](#)].
- L-2: The IPv6 CE router MUST assign a separate /64 from its delegated prefix(es) (and ULA prefix if configured to provide ULA addressing) for each of its LAN interfaces.
- L-3: An IPv6 CE router MUST advertise itself as a router for the delegated prefix(es) (and ULA prefix if configured to provide ULA addressing) using the "Route Information Option" specified in [Section 2.3 of \[RFC4191\]](#). This advertisement is independent of having or not having IPv6 connectivity on the WAN interface.
- L-4: An IPv6 CE router MUST NOT advertise itself as a default router with a Router Lifetime [[RFC4861](#)] greater than zero if it has no prefixes configured or delegated to it.
- L-5: The IPv6 CE router MUST make each LAN interface an advertising interface according to [[RFC4861](#)].
- L-6: In Router Advertisement messages, the Prefix Information option's A and L flags MUST be set to 1 by default.
- L-7: The A and L flags' settings SHOULD be user-configurable.
- L-8: The IPv6 CE router MUST support a DHCPv6 server capable of IPv6 address assignment according to [[RFC3315](#)] OR a stateless DHCPv6 server according to [[RFC3736](#)] on its LAN interfaces.
- L-9: Unless the IPv6 CE router is configured to support the DHCPv6 IA\_NA option, it SHOULD set the M flag to 0 and the O flag to 1 in its Router Advertisement messages [[RFC4861](#)].
- L-10: The IPv6 CE router MUST support providing DNS information in the DHCPv6 DNS\_SERVERS and DOMAIN\_LIST options [[RFC3646](#)].
- L-11: The IPv6 CE router MUST support providing DNS information in the Router Advertisement Recursive DNS Server (RDNSS) and DNS Search List (DNSSL) options as specified in [[RFC6106](#)].
- L-12: The IPv6 CE router SHOULD make available a subset of DHCPv6 options (as listed in [Section 5.3 of \[RFC3736\]](#)) received from the DHCPv6 client on its WAN interface to its LAN-side DHCPv6 server.



- L-13: If the delegated prefix changes, i.e., the current prefix is replaced with a new prefix without any overlapping time period, then the IPv6 CE router MUST immediately advertise the old prefix with a Preferred Lifetime of zero and a Valid Lifetime of the lower of the current Valid Lifetime and two hours (which must be decremented in real time) in a Router Advertisement message as described in [Section 5.5.3](#), (e) of [\[RFC4862\]](#).
- L-14: The IPv6 CE router MUST send an ICMPv6 Destination Unreachable message, code 5 (Source address failed ingress/egress policy) for packets forwarded to it that use an address from a prefix that has been deprecated.

#### **[4.4.](#) Transition Technologies Support**

##### **[4.4.1.](#) 6rd**

The IPv6 CE Router can be used to offer IPv6 service to a LAN, even when the WAN access network only supports IPv4. One technology that supports IPv6 service over an IPv4 network is IPv6 Rapid Deployment (6rd). 6rd encapsulates IPv6 traffic from the end user LAN inside IPv4 at the IPv6 CE Router and sends it to a Service Provider Border Relay (BR). The IPv6 CE Router calculates a 6rd delegated IPv6 prefix during 6rd configuration, and sub-delegates the 6rd delegated prefix to devices in the LAN.

The IPv6 CE Router SHOULD implement 6rd functionality as specified in [\[RFC5969\]](#).

6rd requirements:

- 6RD-1: If the IPv6 CE Router implements 6rd functionality, the CE Router WAN interface MUST support at least one 6rd Virtual Interface.
- 6RD-2: If the IPv6 CE router implements 6rd functionality, it MUST support 6rd configuration via the 6rd DHCPv4 Option (212) and if the IPv6 CE router is capable of automated configuration of IPv4 through IPCP (i.e., over a PPP connection), it MUST support user-entered configuration of 6rd. The IPv6 CE router MAY use other mechanisms to configure 6rd parameters. Such mechanisms are outside the scope of this document.
- 6RD-3: If the CE router implements 6rd functionality, it MUST allow the user to specify whether all IPv6 traffic goes to the 6rd Border Relay, or whether IPv6 traffic to other destinations within the same 6rd domain are routed directly to those





destinations. The CE router MAY use other mechanisms to configure this. Such mechanisms are outside the scope of this document.

6RD-4: If 6rd is operational on the IPv6 CE Router, multicast data MUST NOT be sent on any 6rd tunnel.

6RD-5: The CE Router MUST NOT forward 6RD traffic over a DS-Lite ([RFC6333]) tunnel.

#### **4.4.2. Dual-Stack Lite(DS-Lite)**

Even as users migrate from IPv4 to IPv6 addressing, a significant percentage of Internet resources and content will remain accessible only through IPv4. Also, many end-user devices will only support IPv4. As a consequence, Service Providers require mechanisms to allow customers to continue to access content and resources using IPv4 even after the last IPv4 allocations have been fully depleted. One technology that can be used for IPv4 address extension is DS-Lite.

DS-Lite enables a Service Provider to share IPv4 addresses among multiple customers by combining two well-known technologies: IP in IP (IPv4-in-IPv6) tunneling and Carrier Grade NAT. More specifically, Dual-Stack-Lite encapsulates IPv4 traffic inside an IPv6 tunnel at the IPv6 CE Router and sends it to a Service Provider Address Family Transition Router (AFTR). Configuration of the IPv6 CE Router to support IPv4 LAN traffic is outside the scope of this document.

The IPv6 CE Router SHOULD implement DS-Lite functionality as specified in [RFC6333].

WAN requirements:

DLW-1: To facilitate IPv4 extension over an IPv6 network, if the CE Router supports DS-Lite functionality, the CE Router WAN interface MUST implement a B4 Interface as specified in [RFC6333].

DLW-2: If the IPv6 CE Router implements DS-Lite functionality, the CE Router MUST support using a DS-Lite DHCPv6 option [RFC6334] to configure the DS-Lite tunnel. The IPv6 CE Router MAY use other mechanisms to configure DS-Lite parameters. Such mechanisms are outside the scope of this document.



- DLW-3: IPv6 CE Router MUST NOT perform IPv4 Network Address Translation (NAT) on IPv4 traffic encapsulated using DS-Lite.
- DLW-4: If the IPv6 CE Router is configured with a public IPv4 address on its WAN interface, where public IPv4 address is defined as any address which is not in the private IP address space specified in [\[RFC5735\]](#) and also not in the reserved IP address space specified in [\[RFC6333\]](#), then the IPv6 CE Router MUST disable the DS-Lite B4 element.
- DLW-5: If DS-Lite is operational on the IPv6 CE Router, multicast data MUST NOT be sent on any DS-Lite tunnel.
- DLW-6: The CE Router MUST NOT forward DS-Lite traffic over a 6RD tunnel.

#### **4.4.3. Transition Technologies Coexistence**

Supporting transition technologies that may coexist with native service requires control over provisioning and sunsetting. Some guidelines follow:

1. Initiate native IPv4/IPv6 provisioning (e.g. via DHCP) simultaneously.
2. After IPv4 provisioning completes, if 6rd parameters are obtained from the DHCPv4 transaction or configured on the device, initiate 6rd.
3. After IPv6 provisioning completes, if DS-Lite parameters are obtained from the DHCPv6 transaction or configured on the device, initiate DS-Lite.
4. Routes over the DS-Lite tunnel always have a higher administrative distance than native IPv4 routes.
5. Selection of 6rd tunnel or native IPv6 output interface on the CE router is determined by the source IPv6 address of the packet from a host.
6. The CE router messages to the host the use of native IPv6 in preference to 6rd.

During a sunsetting activity such as deprecating 6rd and moving to native IPv6, the IPv6 CE router MUST immediately advertise the 6rd prefix with a Preferred Lifetime of zero and a Valid Lifetime of the lower of the current Valid Lifetime and two hours (which must be decremented in real time) in a Router Advertisement message as



described in [Section 5.5.3](#), (e) of [\[RFC4862\]](#). Due to the two hours rule specified in [\[RFC4862\]](#), the 6rd and the native IPv6 prefix will coexist in the home network. The two hours rule specified in [section 5.5.3 of \[RFC4862\]](#) causes any deprecated prefix to linger on the node even when an RA has sent a Preferred Lifetime of zero to expire the prefix to the node. During such coexistence of multiple prefixes, the CE router sends an ICMPv6 error for packets sourced or destined related to the deprecated prefix. Note this document already includes text in bullet L-14 in [section 4.3](#) for such a provision.

#### **4.5. Security Considerations**

It is considered a best practice to filter obviously malicious traffic (e.g., spoofed packets, "Martian" addresses, etc.). Thus, the IPv6 CE router ought to support basic stateless egress and ingress filters. The CE router is also expected to offer mechanisms to filter traffic entering the customer network; however, the method by which vendors implement configurable packet filtering is beyond the scope of this document.

Security requirements:

- S-1: The IPv6 CE router SHOULD support [\[RFC6092\]](#). In particular, the IPv6 CE router SHOULD support functionality sufficient for implementing the set of recommendations in [\[RFC6092\]](#), [Section 4](#). This document takes no position on whether such functionality is enabled by default or mechanisms by which users would configure it.
- S-2: The IPv6 CE router MUST support ingress filtering in accordance with [BCP 38](#) [\[RFC2827\]](#).
- S-3: If the IPv6 CE router firewall is configured to filter incoming tunneled data, the firewall SHOULD provide the capability to filter decapsulated packets from a tunnel.

#### **5. Acknowledgements**

Thanks to the following people (in alphabetical order) for their guidance and feedback:

Mikael Abrahamsson, Tore Anderson, Merete Asak, Scott Beuker, Mohamed Boucadair, Rex Bullinger, Brian Carpenter, Tassos Chatzithomaoglou, Lorenzo Colitti, Remi Denis-Courmont, Gert Doering, Alain Durand, Katsunori Fukuoka, Tony Hain, Thomas Herbst, Kevin Johns, Erik Kline, Stephen Kramer, Victor Kuarsingh, Francois-Xavier Le Bail, Arifumi Matsumoto, David Miles, Shin Miyakawa, Jean-Francois Mule, Michael



Newbery, Carlos Pignataro, John Pomeroy, Antonio Querubin, Hiroki Sato, Teemu Savolainen, Matt Schmitt, David Thaler, Mark Townsley, Bernie Volz, Dan Wing, James Woodyatt, and Cor Zwart.

This document is based in part on CableLabs' eRouter specification. The authors wish to acknowledge the additional contributors from the eRouter team:

Ben Bekele, Amol Bhagwat, Ralph Brown, Eduardo Cardona, Margo Dolas, Toerless Eckert, Doc Evans, Roger Fish, Michelle Kuska, Diego Mazzola, John McQueen, Harsh Parandekar, Michael Patrick, Saifur Rahman, Lakshmi Raman, Ryan Ross, Ron da Silva, Madhu Sudan, Dan Torbet, and Greg White.

## **6. Contributors**

The following people have participated as co-authors or provided substantial contributions to this document: Ralph Droms, Kirk Erichsen, Fred Baker, Jason Weil, Lee Howard, Jean-Francois Tremblay, Yiu Lee, John Jason Brzozowski, and Heather Kirksey.

## **7. References**

### **7.1. Normative References**

- [RFC1102] Clark, D., "Policy routing in Internet protocols", [RFC 1102](#), May 1989.
- [RFC1104] Braun, H., "Models of policy based routing", [RFC 1104](#), June 1989.
- [RFC1122] Braden, R., "Requirements for Internet Hosts - Communication Layers", STD 3, [RFC 1122](#), October 1989.
- [RFC1918] Rekhter, Y., Moskowitz, R., Karrenberg, D., Groot, G., and E. Lear, "Address Allocation for Private Internets", [BCP 5](#), [RFC 1918](#), February 1996.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2464] Crawford, M., "Transmission of IPv6 Packets over Ethernet Networks", [RFC 2464](#), December 1998.
- [RFC2827] Ferguson, P. and D. Senie, "Network Ingress Filtering: Defeating Denial of Service Attacks which employ IP Source





Address Spoofing", [BCP 38](#), [RFC 2827](#), May 2000.

- [RFC3315] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C., and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), July 2003.
- [RFC3484] Draves, R., "Default Address Selection for Internet Protocol version 6 (IPv6)", [RFC 3484](#), February 2003.
- [RFC3633] Troan, O. and R. Droms, "IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) version 6", [RFC 3633](#), December 2003.
- [RFC3646] Droms, R., "DNS Configuration options for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3646](#), December 2003.
- [RFC3736] Droms, R., "Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6", [RFC 3736](#), April 2004.
- [RFC4075] Kalusivalingam, V., "Simple Network Time Protocol (SNTP) Configuration Option for DHCPv6", [RFC 4075](#), May 2005.
- [RFC4191] Draves, R. and D. Thaler, "Default Router Preferences and More-Specific Routes", [RFC 4191](#), November 2005.
- [RFC4193] Hinden, R. and B. Haberman, "Unique Local IPv6 Unicast Addresses", [RFC 4193](#), October 2005.
- [RFC4242] Venaas, S., Chown, T., and B. Volz, "Information Refresh Time Option for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 4242](#), November 2005.
- [RFC4294] Loughney, J., "IPv6 Node Requirements", [RFC 4294](#), April 2006.
- [RFC4443] Conta, A., Deering, S., and M. Gupta, "Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification", [RFC 4443](#), March 2006.
- [RFC4605] Fenner, B., He, H., Haberman, B., and H. Sandick, "Internet Group Management Protocol (IGMP) / Multicast Listener Discovery (MLD)-Based Multicast Forwarding ("IGMP/MLD Proxying")", [RFC 4605](#), August 2006.
- [RFC4632] Fuller, V. and T. Li, "Classless Inter-domain Routing (CIDR): The Internet Address Assignment and Aggregation Plan", [BCP 122](#), [RFC 4632](#), August 2006.



- [RFC4779] Asadullah, S., Ahmed, A., Popoviciu, C., Savola, P., and J. Palet, "ISP IPv6 Deployment Scenarios in Broadband Access Networks", [RFC 4779](#), January 2007.
- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", [RFC 4861](#), September 2007.
- [RFC4862] Thomson, S., Narten, T., and T. Jinmei, "IPv6 Stateless Address Autoconfiguration", [RFC 4862](#), September 2007.
- [RFC4864] Van de Velde, G., Hain, T., Droms, R., Carpenter, B., and E. Klein, "Local Network Protection for IPv6", [RFC 4864](#), May 2007.
- [RFC5072] S.Varada, Haskins, D., and E. Allen, "IP Version 6 over PPP", [RFC 5072](#), September 2007.
- [RFC5735] Cotton, M. and L. Vegoda, "Special Use IPv4 Addresses", [BCP 153](#), [RFC 5735](#), January 2010.
- [RFC5942] Singh, H., Beebee, W., and E. Nordmark, "IPv6 Subnet Model: The Relationship between Links and Subnet Prefixes", [RFC 5942](#), July 2010.
- [RFC5969] Townsley, W. and O. Troan, "IPv6 Rapid Deployment on IPv4 Infrastructures (6rd) -- Protocol Specification", [RFC 5969](#), August 2010.
- [RFC6092] Woodyatt, J., "Recommended Simple Security Capabilities in Customer Premises Equipment (CPE) for Providing Residential IPv6 Internet Service", [RFC 6092](#), January 2011.
- [RFC6106] Jeong, J., Park, S., Beloeil, L., and S. Madanapalli, "IPv6 Router Advertisement Options for DNS Configuration", [RFC 6106](#), November 2010.
- [RFC6204] Singh, H., Beebee, W., Donley, C., Stark, B., and O. Troan, "Basic Requirements for IPv6 Customer Edge Routers", [RFC 6204](#), April 2011.
- [RFC6333] Durand, A., Droms, R., Woodyatt, J., and Y. Lee, "Dual-Stack Lite Broadband Deployments Following IPv4 Exhaustion", [RFC 6333](#), August 2011.
- [RFC6334] Hankins, D. and T. Mrugalski, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Option for Dual-Stack Lite",



[RFC 6334](#), August 2011.

## 7.2. Informative References

### [HAPPY-EYEBALLS]

Wing, D. and A. Yourtchenko, "Happy Eyeballs: Trending Towards Success with Dual-Stack Hosts", Work in Progress, March 2011.

### [MULTIHOMING-WITHOUT-NAT]

Troan, O., Ed., Miles, D., Matsushima, S., Okimoto, T., and D. Wing, "IPv6 Multihoming without Network Address Translation", Work in Progress, December 2010.

[RFC6144] Baker, F., Li, X., Bao, C., and K. Yin, "Framework for IPv4/IPv6 Translation", [RFC 6144](#), March 2011.

### [UPnP-IGD]

UPnP Forum, "Universal Plug and Play (UPnP) Internet Gateway Device (IGD)", November 2001, <<http://www.upnp.org/>>.

## Appendix A. Changes from [RFC 6204](#)

1. Added IP transition technologies available in RFC form.
2. Added IP transition technologies coexistence.
3. Changed bullet G-5 to augment the condition of losing IPv6 default router(s) with loss of connectivity.
4. Removed bullet WAA-7 due to not reaching consensus by various service provider standards bodies. The removal of text does not remove any critical functionality from the CE specification.
5. Changed bullet WAA-8 to qualify WAN behavior only if not configured to perform DHCPv6. This way a deployment specific profile can mandate DHCPv6 numbered WAN without conflicting with this document.
6. Changed the WPD-2 bullet from MUST be configurable to SHOULD be configurable.
7. Changed bullet WPD-4 for a default behavior without compromising any prior specification of the CE device. The change was needed by a specific layer 1 deployment which wanted to specify a MUST for DHCPv6 in their layer 1 profile and not conflict with this document.



8. Changed bullet WPD-7 to qualify text for DHCPv6.
9. Added a new WAN DHCPv6 requirement for SOL\_MAX\_RT of DHCPv6 so that if an service provider does not have DHCPv6 service enabled CE routers do not send too frequent DHCPv6 requests to the service provider DHCPv6 server.
10. Changed bullet L-11 from SHOULD provide DNS options in the RA to MUST provide DNS option in the RA.
11. New bullet added to the Security Considerations section due to addition of transition technology. The CE router filters decapsulated 6rd data.
12. Minor change involved changing ICMP to ICMPv6.

#### Authors' Addresses

Hemant Singh  
Cisco Systems, Inc.  
1414 Massachusetts Ave.  
Boxborough, MA 01719  
USA

Phone: +1 978 936 1622  
EMail: [shemant@cisco.com](mailto:shemant@cisco.com)  
URI: <http://www.cisco.com/>

Wes Beebee  
Cisco Systems, Inc.  
1414 Massachusetts Ave.  
Boxborough, MA 01719  
USA

Phone: +1 978 936 2030  
EMail: [wbeebee@cisco.com](mailto:wbeebee@cisco.com)  
URI: <http://www.cisco.com/>

Chris Donley  
CableLabs  
858 Coal Creek Circle  
Louisville, CO 80027  
USA

EMail: [c.donley@cablelabs.com](mailto:c.donley@cablelabs.com)





Barbara Stark  
AT&T  
725 W Peachtree St.  
Atlanta, GA 30308  
USA

EMail: [barbara.stark@att.com](mailto:barbara.stark@att.com)

Ole Troan (editor)  
Cisco Systems, Inc.  
Telemarksvingen 20  
N-0655 OSLO,  
Norway

EMail: [ot@cisco.com](mailto:ot@cisco.com)

