

LPWAN  
Internet-Draft  
Updates: [5172](#) (if approved)  
Intended status: Standards Track  
Expires: 6 December 2020

P. Thubert, Ed.  
Cisco Systems  
4 June 2020

SCHC over PPP  
draft-thubert-lpwan-schc-over-ppp-01

## Abstract

This document extends [RFC 5172](#) to signal the use of SCHC as the compression method between a pair of nodes over PPP. Combined with [RFC 2516](#), this enables the use of SCHC over Ethernet and Wi-Fi.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 6 December 2020.

## Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Internet-Draft

SCHCoPPP

June 2020

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	<a href="#">BCP 14</a> . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Extending <a href="#">RFC 5172</a> . . . . .	<a href="#">3</a>
<a href="#">4.</a>	Profiling SCHC for high speed links . . . . .	<a href="#">3</a>
<a href="#">4.1.</a>	Mapping the SCHC Architecture . . . . .	<a href="#">4</a>
<a href="#">4.2.</a>	SCHC Parameters . . . . .	<a href="#">4</a>
<a href="#">4.2.1.</a>	Resulting Packet Format . . . . .	<a href="#">5</a>
<a href="#">4.3.</a>	Security Considerations . . . . .	<a href="#">6</a>
<a href="#">5.</a>	IANA Considerations . . . . .	<a href="#">7</a>
<a href="#">6.</a>	Acknowledgments . . . . .	<a href="#">7</a>
<a href="#">7.</a>	Normative References . . . . .	<a href="#">7</a>
<a href="#">8.</a>	Informative References . . . . .	<a href="#">8</a>
	Author's Address . . . . .	<a href="#">8</a>

[1.](#) Introduction

The Point-to-Point Protocol (PPP) [[RFC5172](#)] provides a standard method of encapsulating network-layer protocol information over point-to-point links. "A Method for Transmitting PPP Over Ethernet (PPPoE)" [[RFC2516](#)] transports PPP over Ethernet between a pair of nodes. It is compatible with a translating bridge to Wi-Fi, and therefore enables PPP over Wi-Fi as well.

PPP also defines an extensible Link Control Protocol, and proposes a family of Network Control Protocols (NCPs) for establishing and configuring different network-layer protocols. "IP Version 6 over PPP" [[RFC5072](#)] defines the IPv6 Control Protocol (IPV6CP), which is an NCP for a PPP link, and allows for the negotiation of desirable parameters for an IPv6 interface over PPP.

"Negotiation for IPv6 Datagram Compression Using IPv6 Control Protocol" [[RFC5172](#)] defines the IPv6 datagram compression option that can be negotiated by a node on the link through the IPV6CP. The "Static Context Header Compression (SCHC) and fragmentation for LPWAN, application to UDP/IPv6" [[SCHC](#)] is a compression and fragmentation technique that was defined after the publication of [[RFC5172](#)]. In order to enable SCHC over PPP and therefore Ethernet and Wi-Fi, [[RFC5172](#)] must be extended to signal SCHC as an additional compression method for use over PPP.

## 2. [BCP 14](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)][RFC8174] when, and only when, they appear in all capitals, as shown here.

## 3. Extending [RFC 5172](#)

With this specification, a PPP session defines a virtual link where a SCHC context is established with a particular set of Rules, which is indicated at the set up of the PPP session as follows:

[RFC5172] defines an IPV6CP option called the IPv6-Compression-Protocol Configuration option with a type of 2. The option contains an IPv6-Compression-Protocol field value that indicates a compression protocol and an optional data field as shown in Figure 1:

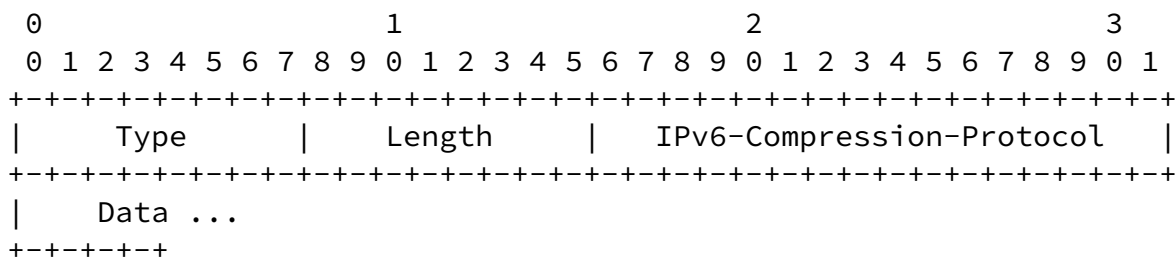


Figure 1: The IPv6-Compression-Protocol Configuration Option

This specification indicates a new IPv6-Compression-Protocol field value for [[SCHC](#)] (see [Section 5](#)), and enables to transport a Uniform Resource Identifier (URI) [[RFC3986](#)] of the set of rules in the optional data. The default format for the set of rules is YANG using the "Data Model for SCHC" [[SCHC\\_DATA\\_MODEL](#)] encoded in JSON as specified in [[RFC7951](#)]. The size of the URL is computed based on the Length of the option as Length-4. If the encoding is asymmetrical,

the initiator of the session is considered downstream, playing the role of the device in an LPWAN network.

#### 4. Profiling SCHC for high speed links

[Appendix D](#) of [SCHC] specifies the profile information that technology specifications such as this must provide. The following section address this requirement.

##### 4.1. Mapping the SCHC Architecture

This specification leverages SCHC between an end point that is an IP Host and possibly a serial DTE (Data Terminal Equipment), and another that is an IP Node (either another IP Host or a Router) and possibly a serial DCE (Data Control Equipment), or a more modern physical or emulated endpoint, e.g., Ethernet devices that exchange IP packets over PPPoE.

Both endpoints MUST support the function of SCHC Compressor/Decompressor (C/D) as shown in Figure 2.

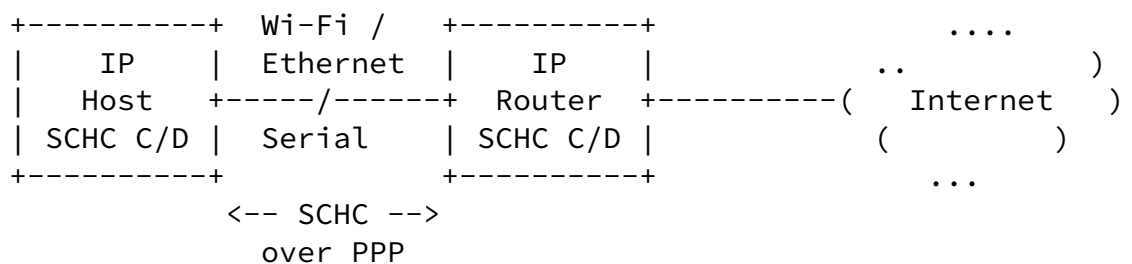


Figure 2: Typical Deployment

The assumption for this document is that the SCHC Fragmenter/Reassembler (F/R) is generally not needed, because the maximum transmission unit (MTU) is expected to be large enough and SCHC only reduces the frame size vs. native IP.

An example use case for SCHC over PPP over Ethernet (PPPoE) would be

to apply SCHC to streamline traffic by reducing the size of the frames and maintain them to a constant size and constant rate, e.g., to simplify the scheduling of [DetNet] packets over TSN or one of the [RAW Technologies]. Scheduling on DetNet links introduces a form of duty cycle, but that does not affect the SCHC operation, since fragmentation is not provided.

A context may be generated for a particular upper layer application, such as a control loop using an industrial automation protocol, to protect the particular flow with a DetNet service. The context can be asymmetric, e.g., when connecting a master and a slave, a client and a server, or a programmable logic controller with a sensor or an actuator.

## 4.2. SCHC Parameters

Compared to typical LPWANs, most serial links and emulations such as PPPoE are very fast and most of the constraints can be alleviated. For this reason, the SCHC profile for PPP is defined as follows:

RuleID numbering scheme: Rules are of a fixed size of two bytes, which allows for more than 65000 different Rules within one session. Since this specification does not leverage the SCHC fragmentation, a SCHC packet is always in the form:

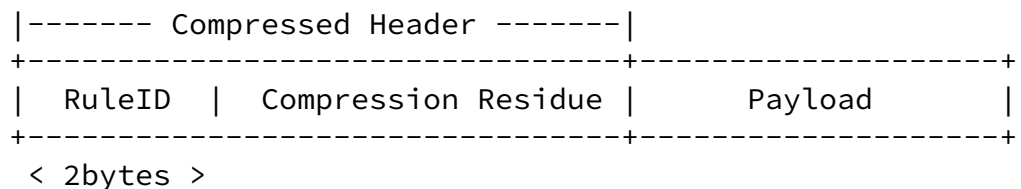


Figure 3: SCHC Packet

Maximum packet size: MAX\_PACKET\_SIZE is aligned to the PPP Link MTU.

Padding: The L2 word is one byte, so padding is up to the next byte boundary. The padding bit is a 0.

### 4.2.1. Resulting Packet Format



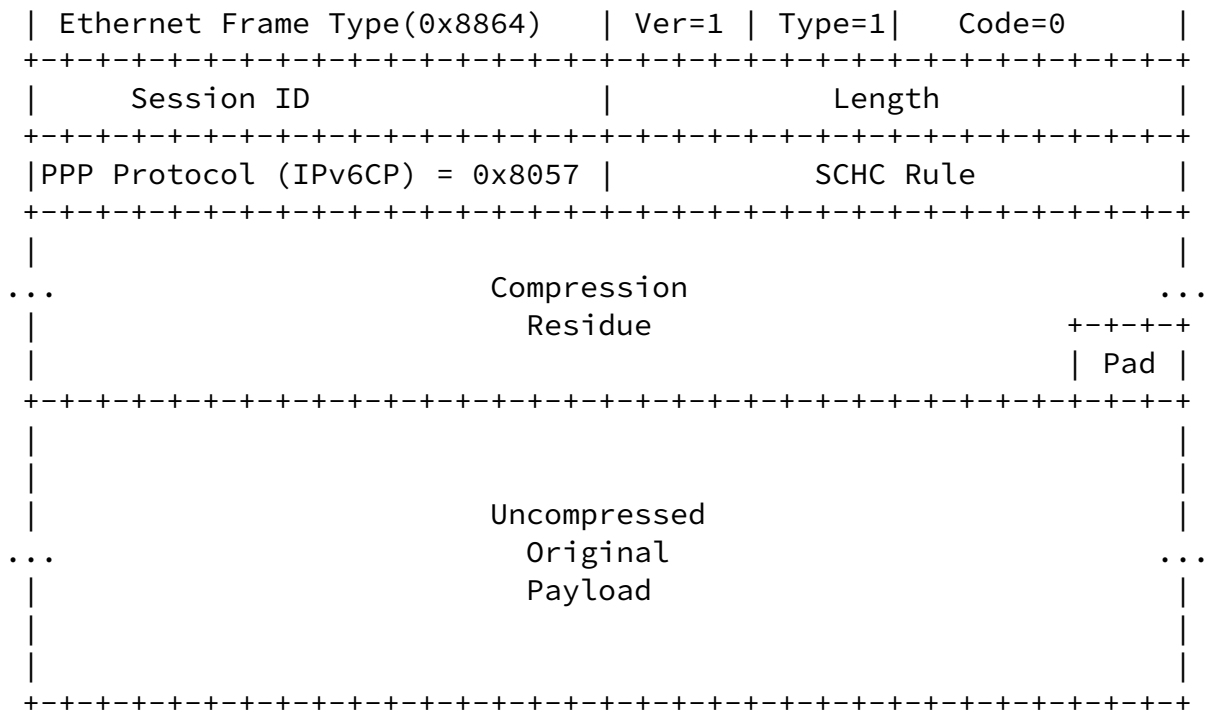


Figure 5: SCHC over PPP over Ethernet Format

### 4.3. Security Considerations

This draft enables to use the SCHC compression and fragmentation over PPP and therefore Ethernet and Wi-Fi with PPPoE. It inherits the possible threats against SCHC listed in the "Security considerations" section of [SCHC].

### 5. IANA Considerations

This document requests the allocation of a new value in the registry "IPv6-Compression-Protocol Types" for "SCHC". A suggested value is proposed in Table 1:

Value	Description	Reference
-------	-------------	-----------

Table 1: IP Header Compression Configuration Option Suboption Types

6. Acknowledgments

7. Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC2516] Mamakos, L., Lidl, K., Evarts, J., Carrel, D., Simone, D., and R. Wheeler, "A Method for Transmitting PPP Over Ethernet (PPPoE)", [RFC 2516](#), DOI 10.17487/RFC2516, February 1999, <<https://www.rfc-editor.org/info/rfc2516>>.

[RFC5072] Varada, S., Ed., Haskins, D., and E. Allen, "IP Version 6 over PPP", [RFC 5072](#), DOI 10.17487/RFC5072, September 2007, <<https://www.rfc-editor.org/info/rfc5072>>.

[RFC5172] Varada, S., Ed., "Negotiation for IPv6 Datagram Compression Using IPv6 Control Protocol", [RFC 5172](#), DOI 10.17487/RFC5172, March 2008, <<https://www.rfc-editor.org/info/rfc5172>>.

[RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, [RFC 3986](#), DOI 10.17487/RFC3986, January 2005, <<https://www.rfc-editor.org/info/rfc3986>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.



Zúñiga, "SCHC: Generic Framework for Static Context Header Compression and Fragmentation", [RFC 8724](#), DOI 10.17487/RFC8724, April 2020, <<https://www.rfc-editor.org/info/rfc8724>>.

## 8. Informative References

### [SCHC\_DATA\_MODEL]

Minaburo, A. and L. Toutain, "Data Model for Static Context Header Compression (SCHC)", Work in Progress, Internet-Draft, [draft-ietf-lpwan-schc-yang-data-model-02](#), 28 February 2020, <<https://tools.ietf.org/html/draft-ietf-lpwan-schc-yang-data-model-02>>.

### [RAW Technologies]

Thubert, P., Cavalcanti, D., Vilajosana, X., Schmitt, C., and J. Farkas, "Reliable and Available Wireless Technologies", Work in Progress, Internet-Draft, [draft-thubert-raw-technologies-05](#), 18 May 2020, <<https://tools.ietf.org/html/draft-thubert-raw-technologies-05>>.

[RFC7951] Lhotka, L., "JSON Encoding of Data Modeled with YANG", [RFC 7951](#), DOI 10.17487/RFC7951, August 2016, <<https://www.rfc-editor.org/info/rfc7951>>.

[DetNet] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", [RFC 8655](#), DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/info/rfc8655>>.

## Author's Address

Pascal Thubert (editor)  
Cisco Systems, Inc  
Building D  
45 Allée des Ormes - BP1200  
06254 Mougins - Sophia Antipolis  
France

Phone: +33 497 23 26 34  
Email: [pthubert@cisco.com](mailto:pthubert@cisco.com)